



P.C.B LAYOUT
TOLERANCE:±0.05

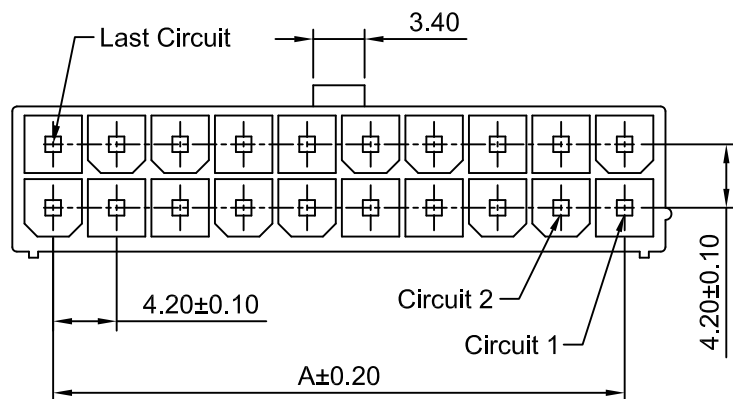

2x2P~2x12P

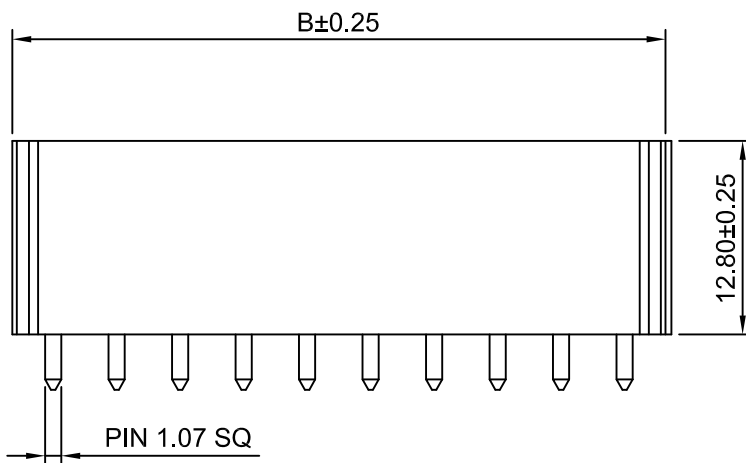

Ordering Information:

C4201WVG-2xXP - $\frac{**}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$ - $\frac{***}{4}$

1.Part No.

2.Size D:

(blank):3.66mm

D45:4.46mm

D53:5.26mm

D71:7.06mm

3.Material:

(blank):LCP,UL94V-0(Black)

6T:Nylon 6T,UL94V-0(Natural)


9T:Nylon 9T,UL94V-0(Natural)

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel

G30:Gold over Nickel(Au:30u")



2x1P

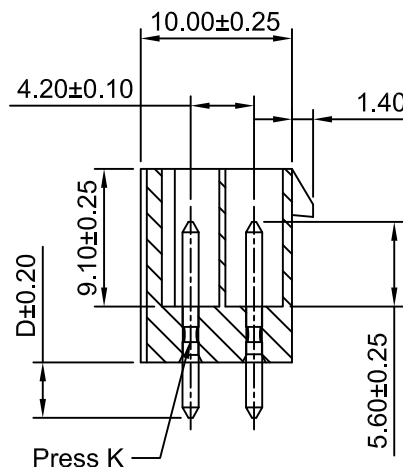

SPECIFICATIONS:

Current Rating: 13A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVG-2x1P	—	5.40
C4201WVG-2x2P	4.20	9.60
C4201WVG-2x3P	8.40	13.80
C4201WVG-2x4P	12.60	18.00
C4201WVG-2x5P	16.80	22.20
C4201WVG-2x6P	21.00	26.40
C4201WVG-2x7P	25.20	30.60
C4201WVG-2x8P	29.40	34.80
C4201WVG-2x9P	33.60	39.00
C4201WVG-2x10P	37.80	43.20
C4201WVG-2x11P	42.00	47.40
C4201WVG-2x12P	46.20	51.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Title :

4.20mm Pitch

Draw By:

Diankui Wan

Approved :

Jack Yin


General Tolerance

x.x±0.25

x.xx±0.20

x.xxx±0.15

PROJECT



180° Dual Row Wafer

DRAW NO : C4201WVG-2xXP

REV
A3

A3	ADD THE -D71 TYPE	2020.03.30
A2	CHANGE THE INFORMATION	2020.02.25
A1	CHANGE THE DRAWING	2019.03.27
A0	NEW RELEASE	2018.12.27
REV	DESCRIPTION	DATE