
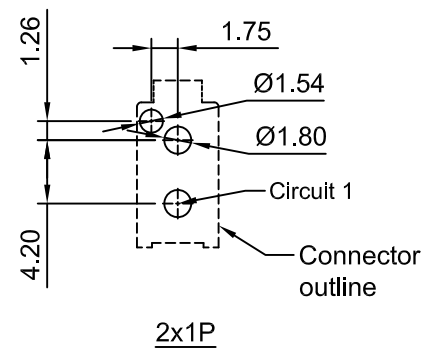
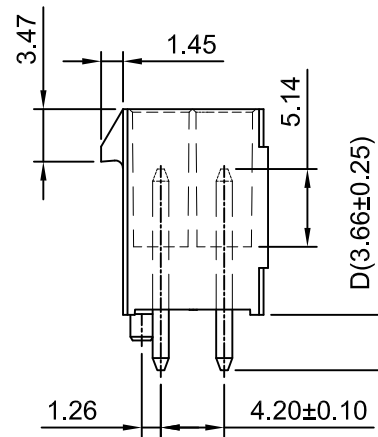
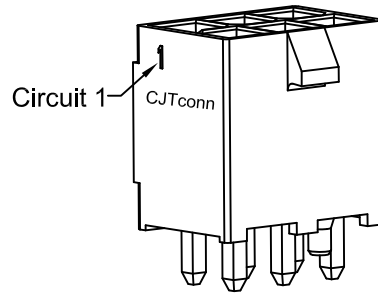
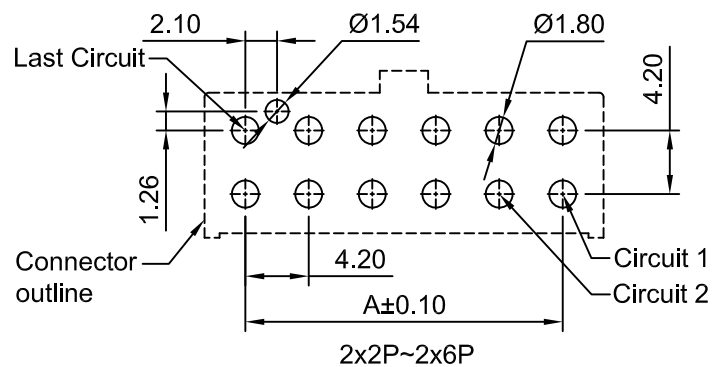


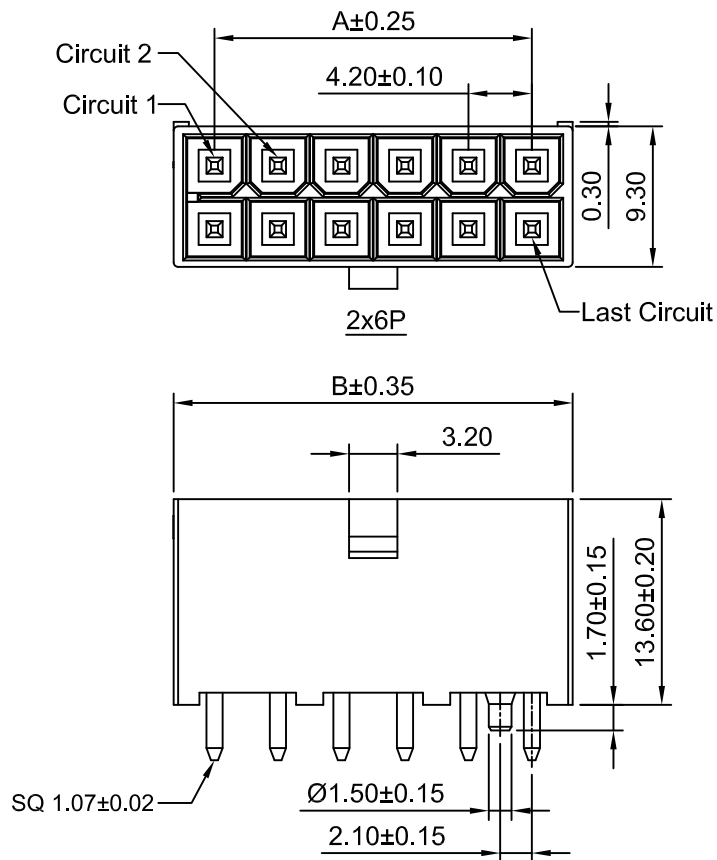

Ordering Information:

C4201WVH-F-2xXP - ** - ** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0,IEC 60335-1,

5th Edition Glow Wire Capable,3.Color:

3.Color:

(Blank): Black

NAT: Natural

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au: 1µin[0.03µm] Min)

G10: Gold over Nickel (Au: 10µin[0.25µm] Min, Mating Area)

G15: Gold over Nickel (Au: 15µin[0.38µm] Min, Mating Area)

G30: Gold over Nickel (Au: 30µin[0.76µm] Min, Mating Area)

5.Size D:

(Blank): 3.66mm

D45: 4.50mm

D53: 5.30mm

D71: 7.10mm

6.Packing:

(Blank): Bag

CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 20A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 2200 AC/minute

Pin Material: Brass

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
C4201WVH-F-2x1P	—	5.40
C4201WVH-F-2x2P	4.20	9.60
C4201WVH-F-2x3P	8.40	13.80
C4201WVH-F-2x4P	12.60	18.00
C4201WVH-F-2x5P	16.80	22.20
C4201WVH-F-2x6P	21.00	26.40

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	4.20mm PITCH VERTICAL DUAL ROW WAFER	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			C4201WVH-F-2xXP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1	


REV	DESCRIPTION	DATE
A1	JL-GC-ECN00607	2025.04.18
A0	NEW RELEASE	2025.02.07




2x1P




2x2P




2x3P

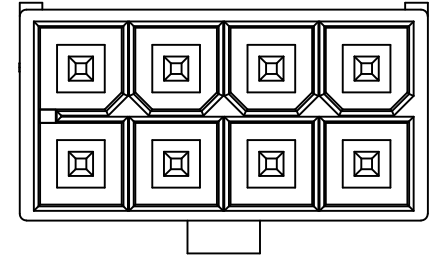

2x4P

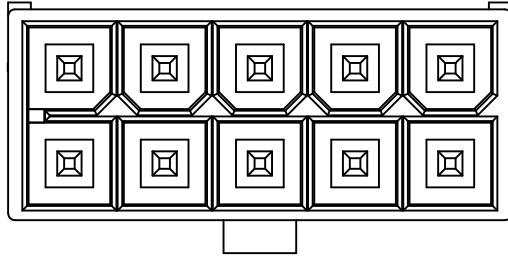

2x5P

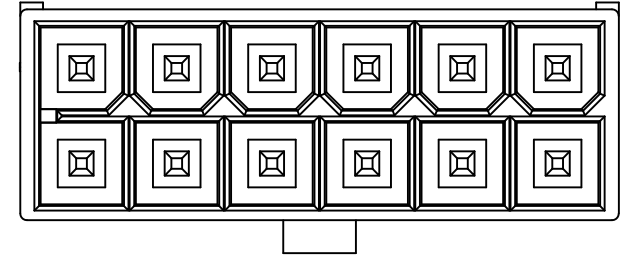

2x6P

A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 4.20mm PITCH VERTICAL DUAL ROW WAFER	
mm	3:1	2 of 2		
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201WVH-F-2xXP	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			REV A0	