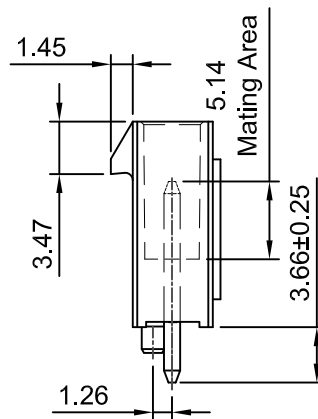
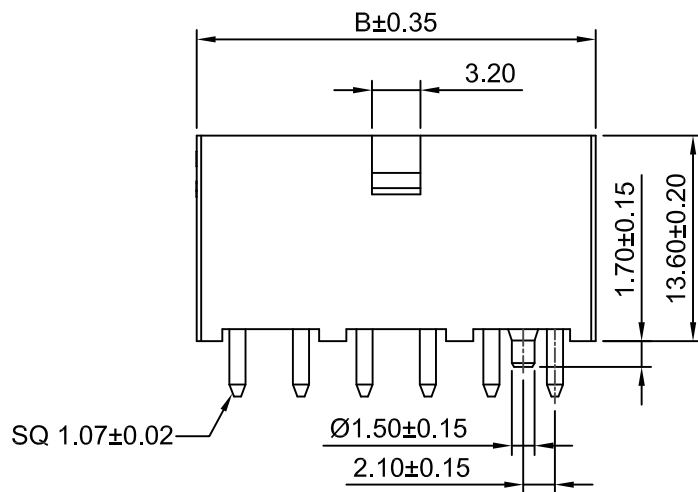
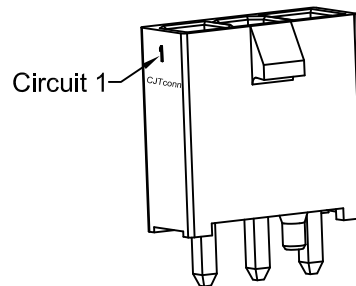
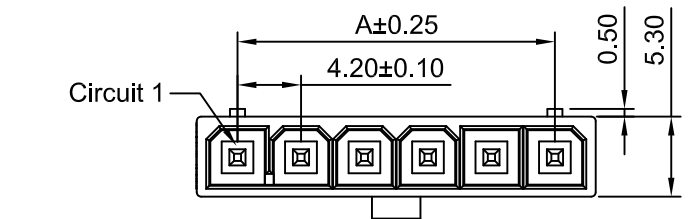


P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

Ordering Information:

C4201WVH-F-XP - ** - ** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0,IEC 60335-1,
5th Edition Glow Wire Capable.

3.Color:

(Blank): Black

NAT: Natural

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel(Au:1µin[0.03µm] Min)

G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

5.Size D:

(Blank): 3.66mm

D45: 4.50mm

D53: 5.30mm

D71: 7.10mm

6.Packing:

(Blank): Bag

CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 20A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 2200 AC/minute

Pin Material: Brass

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
C4201WVH-F-2P	4.20	10.10
C4201WVH-F-3P	8.40	13.80
C4201WVH-F-4P	12.60	18.00
C4201WVH-F-5P	16.80	22.20
C4201WVH-F-6P	21.00	26.40

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	4.20mm PITCH VERTICAL SINGLE ROW DIP WAFER	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			C4201WVH-F-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	


REV	DESCRIPTION	DATE
A1	JL-GC-ECN00607	2025.04.18
A0	NEW RELEASE	2025.02.07




2P




3P

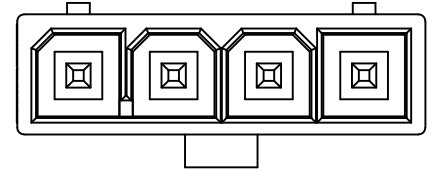

4P

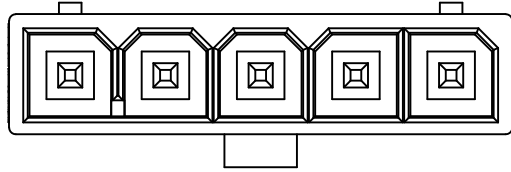

5P

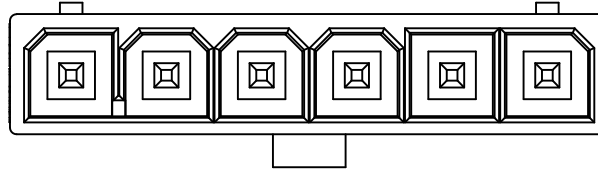

6P

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	2 of 2	4.20mm PITCH VERTICAL SINGLE ROW DIP WAFER
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			C4201WVH-F-XP
A0	NEW RELEASE		REV A0
REV	DESCRIPTION	DATE	