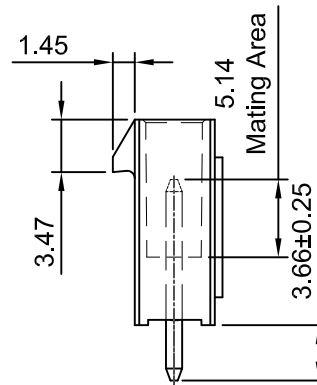
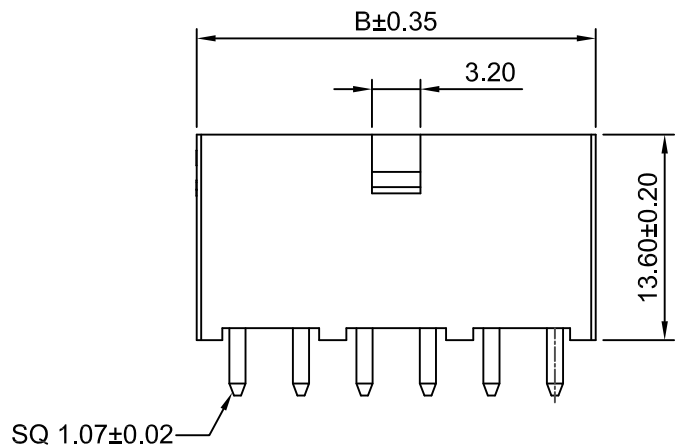
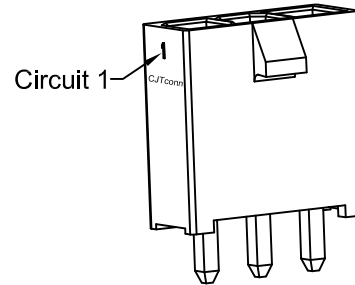
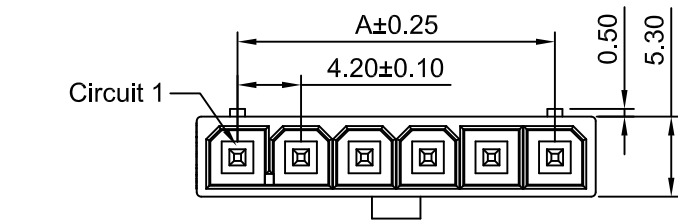


P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

Ordering Information:

C4201WVH-XP - ** - ** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Material:

(Blank): LCP, UL94V-0, IEC 60335-1,
5th Edition Glow Wire Capable.

3.Color:

(Blank): Black

NAT: Natural

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au: 1μm [0.03μm] Min)

G10: Gold over Nickel (Au: 10μm [0.25μm] Min, Mating Area)

G15: Gold over Nickel (Au: 15μm [0.38μm] Min, Mating Area)

G30: Gold over Nickel (Au: 30μm [0.76μm] Min, Mating Area)

5.Size D:

(Blank): 3.66mm

D45: 4.50mm

D53: 5.30mm

D71: 7.10mm

6.Packing:

(Blank): Bag

CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 20A AC, DC

Voltage Rating: 600V AC, DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 2200 AC/minute

Pin Material: Brass


Ordering Information & Dimensions

Part NO.	Dimensions (mm)	
	A	B
C4201WVH-2P	4.20	10.10
C4201WVH-3P	8.40	13.80
C4201WVH-4P	12.60	18.00
C4201WVH-5P	16.80	22.20
C4201WVH-6P	21.00	26.40


CJTconn CHANGJIANG CONNECTORS CO., LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 2	4.20mm PITCH VERTICAL SINGLE ROW DIP WAFER
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C4201WVH-XP
A0	NEW RELEASE	2025.02.07	REV A0
REV	DESCRIPTION	DATE	




2P




3P

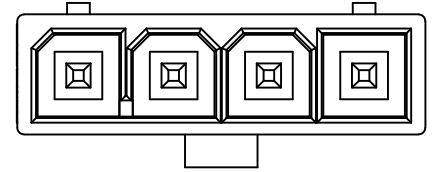

4P

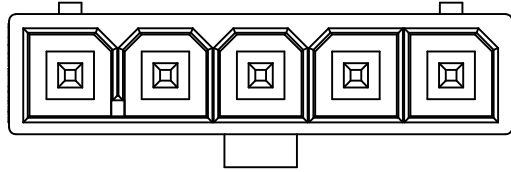

5P

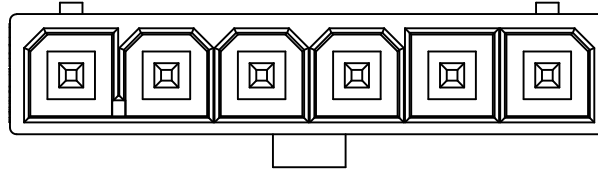

6P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	3:1	2 of 2	4.20mm PITCH VERTICAL SINGLE ROW DIP WAFER	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			REV A0	
			C4201WVH-XP	

A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE