



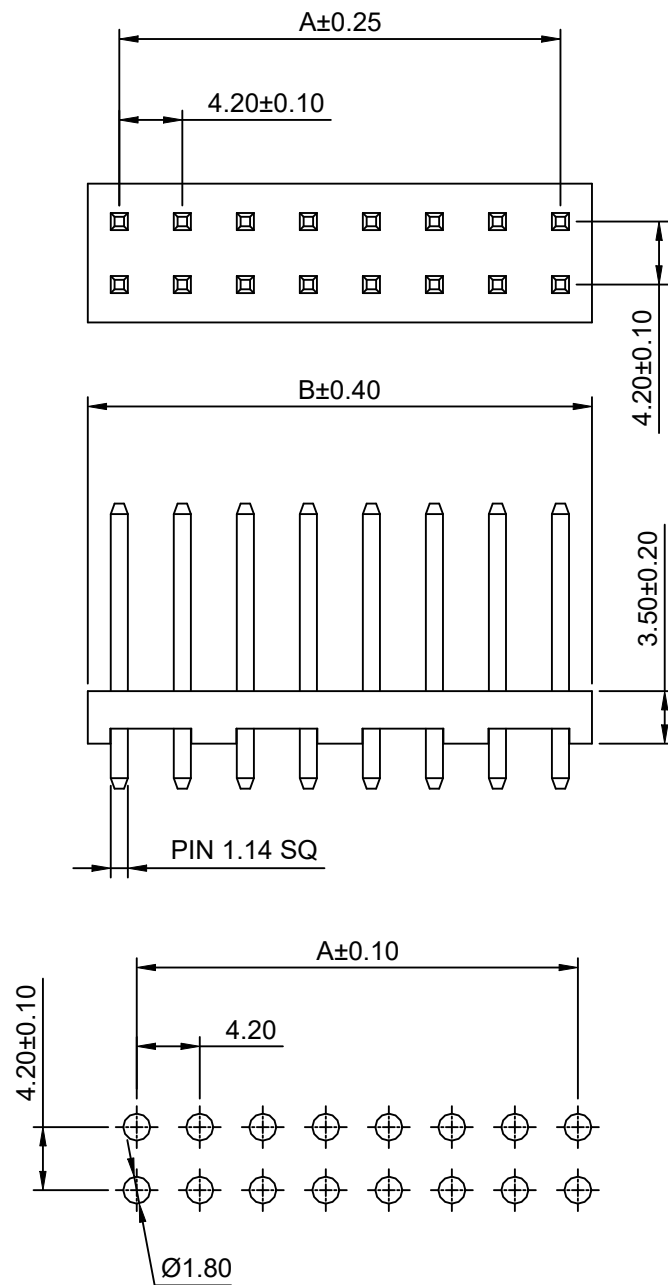

P.C.B LAYOUT
TOLERANCE:±0.05

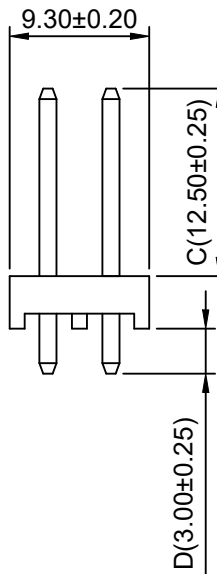

Ordering Information:

C4201WVJ-2xXP - *** - ** - *** - ***
1 2 3 4 5

1.Part No.

2.Material:

(Blank): Nylon 66+Glass Fiber,UL94V-0

9T: Nylon 9T,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank):White

BK: Black

4.Finish:

(blank): Tin over Nickel

G: Gold over Nickel(Au:1u",)

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

5.Size:

(blank): C1250D300(C:12.50,D:3.00)

CxxxDxxx

SPECIFICATIONS:

Current Rating: 13A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material:Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVJ-2x1P	---	4.20
C4201WVJ-2x2P	4.20	8.40
C4201WVJ-2x3P	8.40	12.60
C4201WVJ-2x4P	12.60	16.80
C4201WVJ-2x5P	16.80	21.00
C4201WVJ-2x6P	21.00	25.20
C4201WVJ-2x7P	25.20	29.40
C4201WVJ-2x8P	29.40	33.60
C4201WVJ-2x9P	33.60	37.80
C4201WVJ-2x10P	37.80	42.00
C4201WVJ-2x11P	42.00	46.20
C4201WVJ-2x12P	46.20	50.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	4.20mm PITCH VERTICAL DUAL ROW DIP WAFER	
DRAWN	CHK'D	APPR	DRAWING NO.	
Chengbiao Ye	Diankui Wan	Jack Yin	C4201WVJ-2xXP	
General Tolerances		THIRD ANGLE PROJECTION	REV	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A0	