


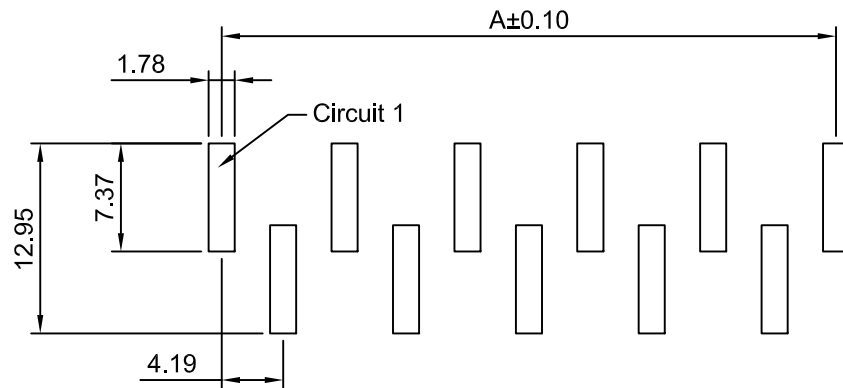
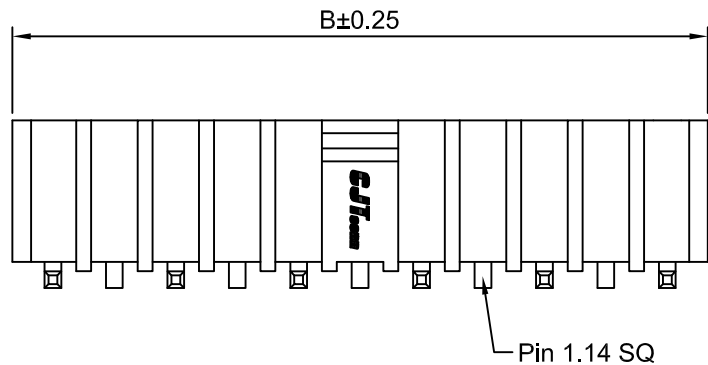
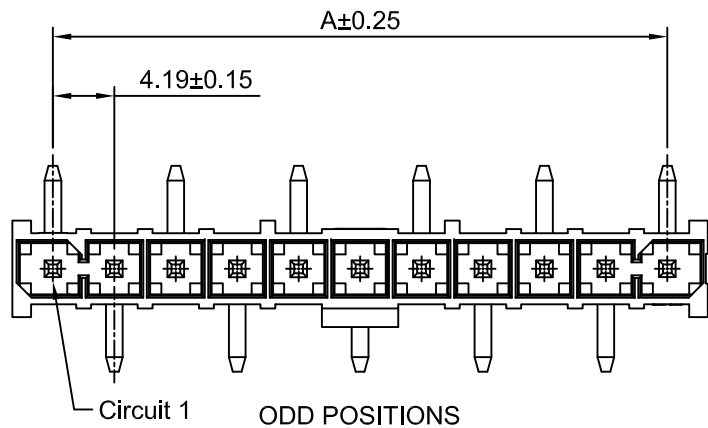


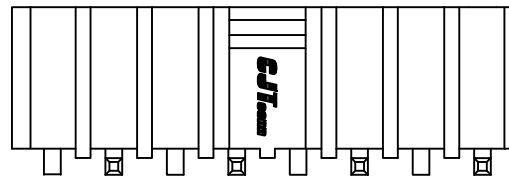

P.C.B LAYOUT
TOLERANCE: ± 0.05

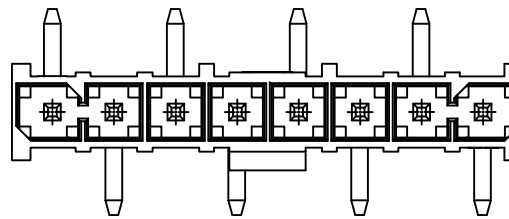

EVEN POSITIONS

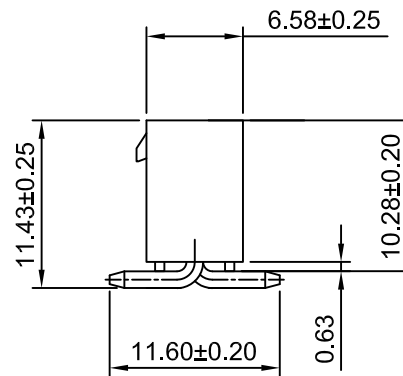

Ordering Information:
C4201WVS-S-XP - *** - ***
1 2 3

- Part NO.
- Color:
(blank): Black
IV: Ivory
- Finish:
(blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 10mΩ Max
After environmental testing: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass
Material: LCP, UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVS-S-2P	4.19	9.72
C4201WVS-S-3P	8.38	13.91
C4201WVS-S-4P	12.57	18.10
C4201WVS-S-5P	16.76	22.29
C4201WVS-S-6P	20.95	26.48
C4201WVS-S-7P	25.14	30.67
C4201WVS-S-8P	29.33	34.86
C4201WVS-S-9P	33.52	39.05
C4201WVS-S-10P	37.71	43.24
C4201WVS-S-11P	41.90	47.43
C4201WVS-S-12P	46.09	51.62
C4201WVS-S-13P	50.28	55.81
C4201WVS-S-14P	54.47	60.00
C4201WVS-S-15P	58.66	64.19

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 4.19mm PITCH 180° SINGLE ROW WAFER - SMD TYPE	
mm	2:1	1 of 1		
DRWN	CHKD	APPR		
Dengchun YI	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201WVS-S-XP	REV A3
x.x±0.25				
x.xx±0.20				
x.xxx±0.15				
ANGLES ±1°				