

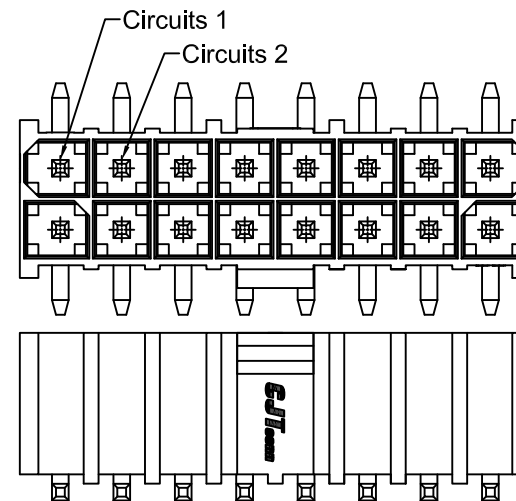
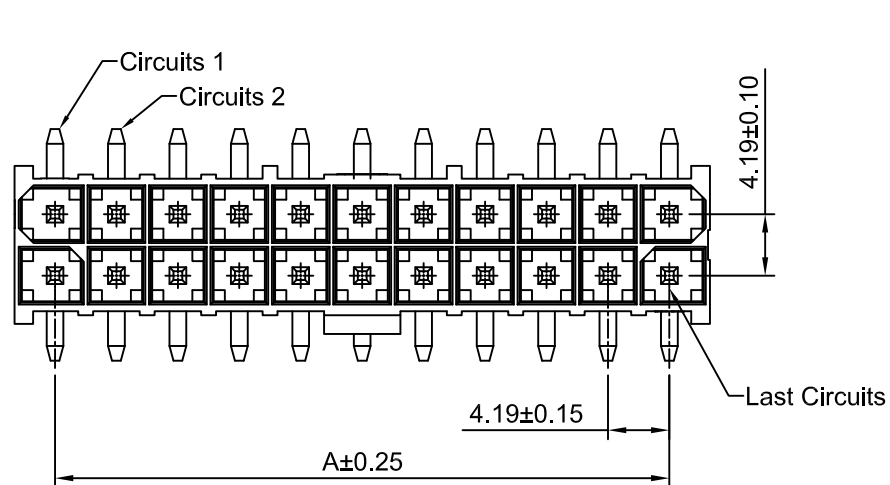
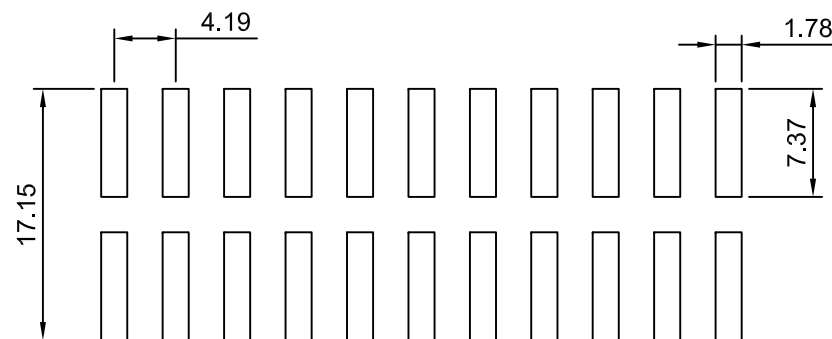


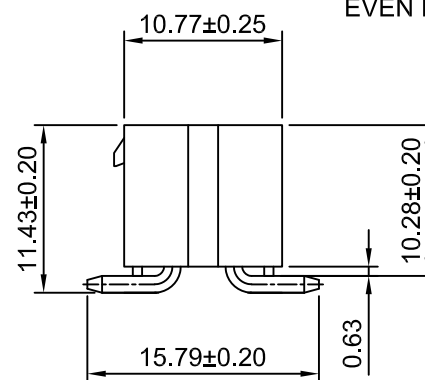

2x2P~2x14P
EVEN POSITIONS

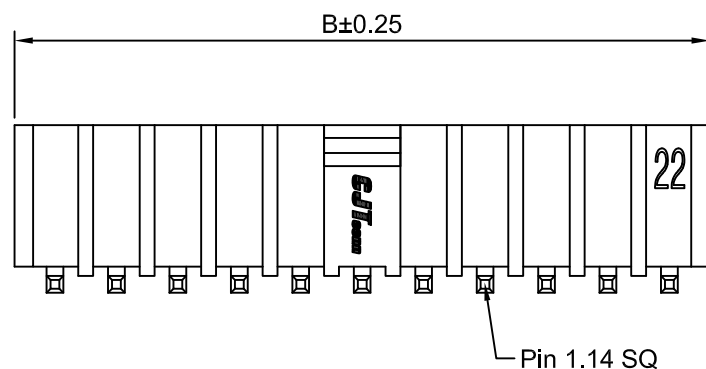

P.C.B LAYOUT

Ordering Information:

C4201WVSB-S-2xXP - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(blank): LCP,UL94V-0

GWT: LCP,UL94V-0,GWT 750°C(Black)

3.Color:

(blank): Black

IV: Ivory

4.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -55°C ~ +105°C

Contact Resistance: 10mΩ Max

After environmental testing: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material:Brass

Material: LCP,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVSB-S-2x2P	4.19	9.40
C4201WVSB-S-2x3P	8.38	13.59
C4201WVSB-S-2x4P	12.57	17.78
C4201WVSB-S-2x5P	16.76	21.97
C4201WVSB-S-2x6P	20.95	26.16
C4201WVSB-S-2x7P	25.14	30.35
C4201WVSB-S-2x8P	29.33	34.54
C4201WVSB-S-2x9P	33.52	38.73
C4201WVSB-S-2x10P	37.71	42.92
C4201WVSB-S-2x11P	41.90	47.11
C4201WVSB-S-2x12P	46.09	51.30
C4201WVSB-S-2x13P	50.28	55.49
C4201WVSB-S-2x14P	54.47	59.68
C4201WVSB-S-2x15P	58.66	63.87

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR	4.19mm PITCH	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DUAL ROW WAFER	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
A3 CHANGE THE DRAWING 2021.01.06			DRAWING NO.	
A2 CHANGE THE DRAWING 2020.09.08				
A1 CHANGE THE DRAWING 2019.11.30			C4201WVSB-S-2xXP	
A0 NEW RELEASE 2015.03.11				
REV	DESCRIPTION		DATE	