


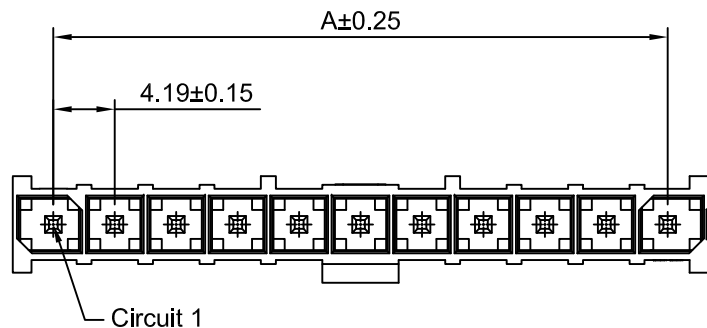



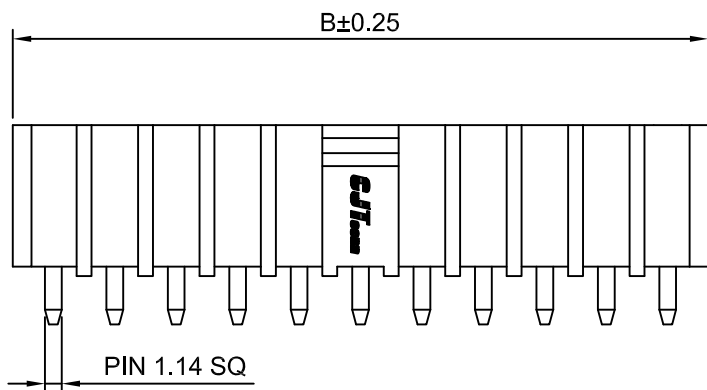

ODD POSITIONS

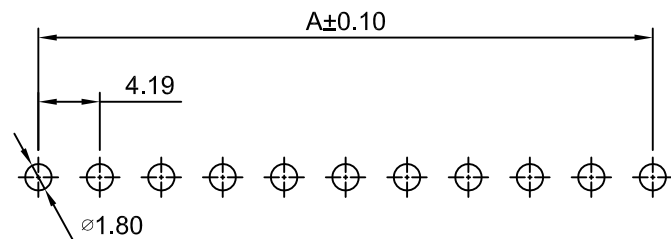

EVEN POSITIONS

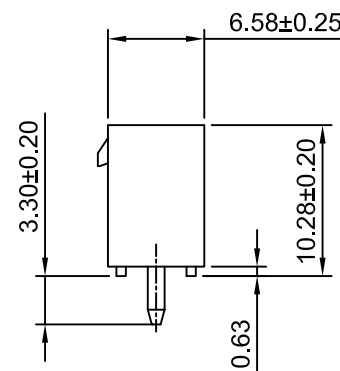

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

C4201WVSB-XP - *** - ***
1 2 3

- 1.Part NO.
- 2.Color:
(blank): Black
IV: Ivory
- 3.Finish:
(blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -55°C ~ +105°C
Contact Resistance: 10mΩ Max
After environmental testing: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material:Brass
Material: LCP,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVSB-2P	4.19	9.72
C4201WVSB-3P	8.38	13.91
C4201WVSB-4P	12.57	18.10
C4201WVSB-5P	16.76	22.29
C4201WVSB-6P	20.95	26.48
C4201WVSB-7P	25.14	30.67
C4201WVSB-8P	29.33	34.86
C4201WVSB-9P	33.52	39.05
C4201WVSB-10P	37.71	43.24
C4201WVSB-11P	41.90	47.43
C4201WVSB-12P	46.09	51.62
C4201WVSB-13P	50.28	55.81
C4201WVSB-14P	54.47	60.00
C4201WVSB-15P	58.66	64.19

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	4.19mm PITCH 180° SINGLE ROW DIP WAFER	
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankut Wan	Jack Yin	DRAWING NO.	
General Tolerances			C4201WVSB-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A3	
			THIRD ANGLE PROJECTION	

REV	DESCRIPTION	DATE
A3	CHANGE THE SIZE	2020.11.05
A2	CHANGE THE DRAWING	2020.09.08
A1	CHANGE THE DRAWING	2019.11.30
A0	NEW RELEASE	2015.03.11