
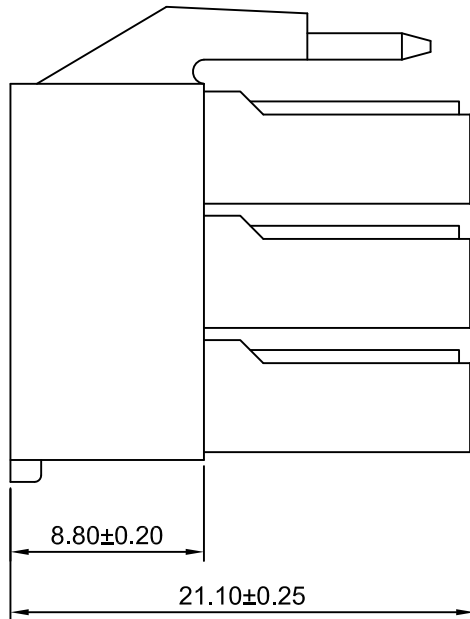


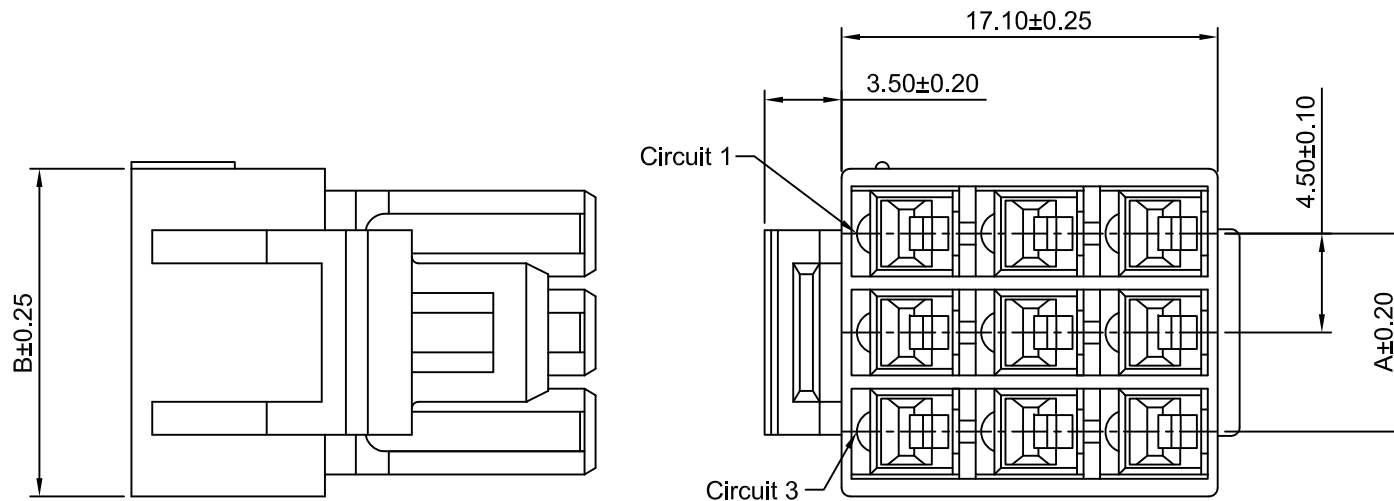

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $7\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4501HF-3x3P	9.00	14.90
C4501HF-3x4P	13.50	19.40
C4501HF-3x5P	18.00	23.90

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	4.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
WenMin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C4501HF-3xXP	