
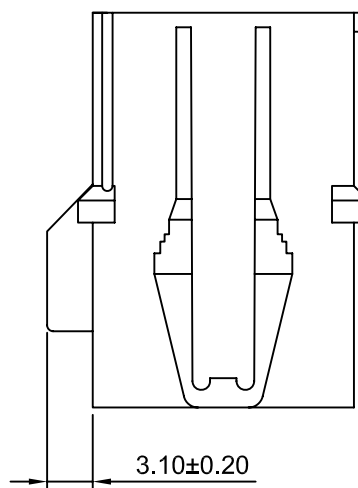
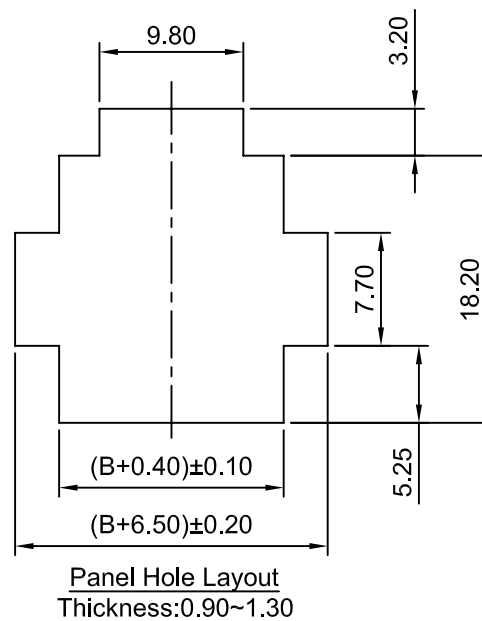
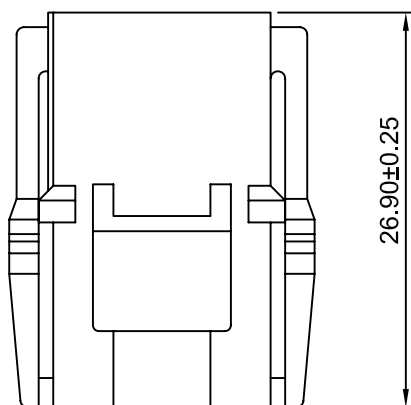


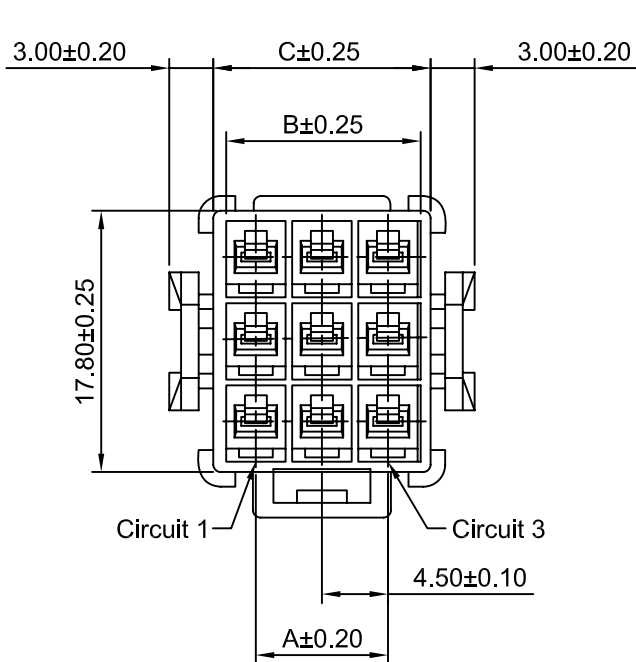

Ordering Information:

C4501HM-3xXP - **
1 2

1.Part No.

2.Material:

(blank):UL94V-0/White

V2:UL94V-2/Natural

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $7\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3x3P	9.00	13.25	14.80	3x5P	18.00	22.25	23.80
3x4P	13.50	17.75	19.30				

CJT

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

Title :

4.50mm PITCH

HOUSING

General Tolerance

x.xx $\leq$ 0.25	ANGLE $\pm$
x.xx $\leq$ 0.20	
x.xxx $\leq$ 0.15	

DRAW NO : C4501HM-3xXP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2015.04.15