


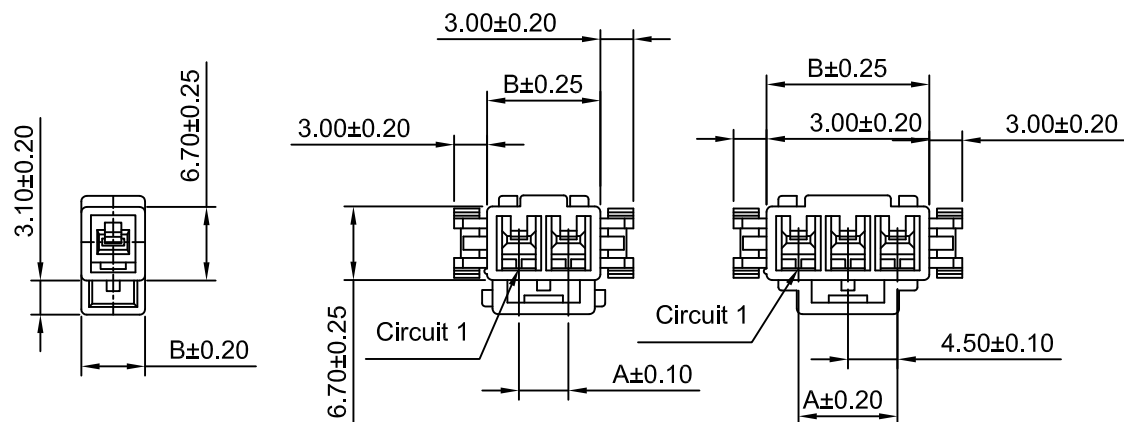

Ordering Information:



C4501HM-XP - **
1 2

1.Part NO.

2.Material:

(Blank):UL94V-0/White

V2:UL94V-2/Natural

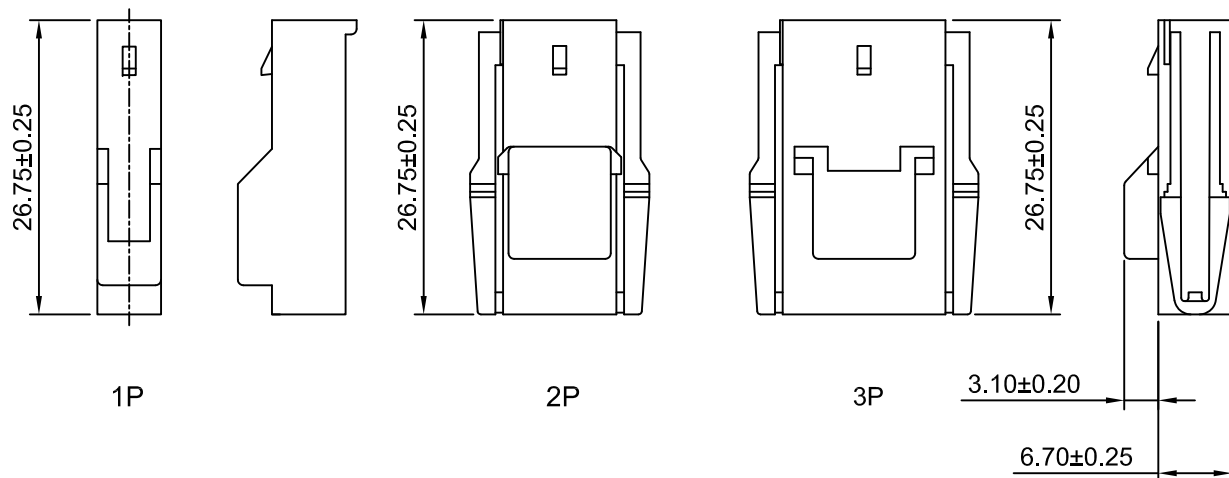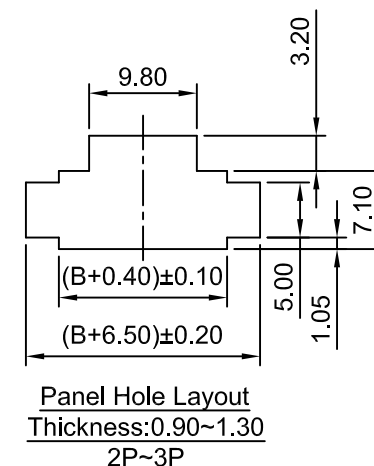

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
1P	---	5.80	3P	9.00	14.80
2P	4.50	10.30			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1.5:1	1 of 1	4.50mm PITCH		
DRAWN	CHKD	APPR	HOUSING		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.		
General Tolerances			THIRD ANGLE PROJECTION		
A1	CHANGE THE DRAWING	2021.06.23	C4501HM-XP		
A0	NEW RELEASE	2015.04.14			
REV	DESCRIPTION	DATE			
			REV A1		