


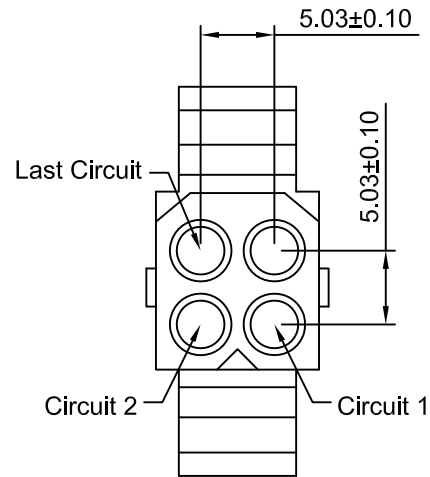

Ordering Information:

C5030HFB-2x2P - **



1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

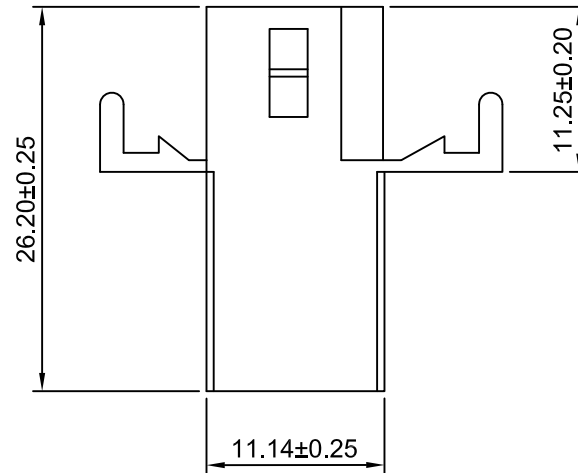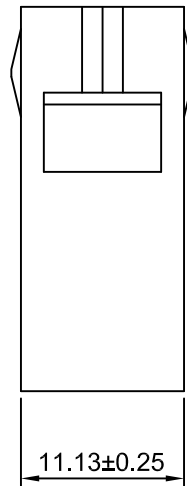

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE			
mm		2:1		1 of 1					
DRAWN		CHK'D		APPR					
Chengbiao Ye		Djankui Wan		Jack Yin		5.03mm PITCH HOUSING			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.				REV A1	
x,x.x±0.25 x,x.x±0.20 x,x.x±0.15 ANGLES ±1°									

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

