


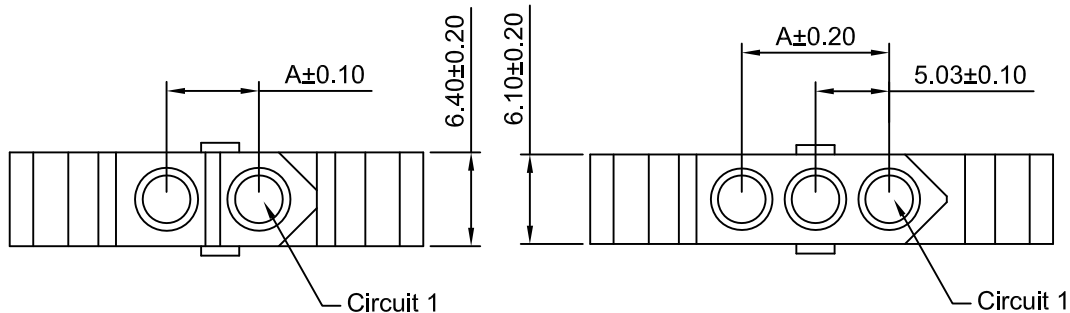

Ordering Information:

C5030HFB-XP - ***

1 2



1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

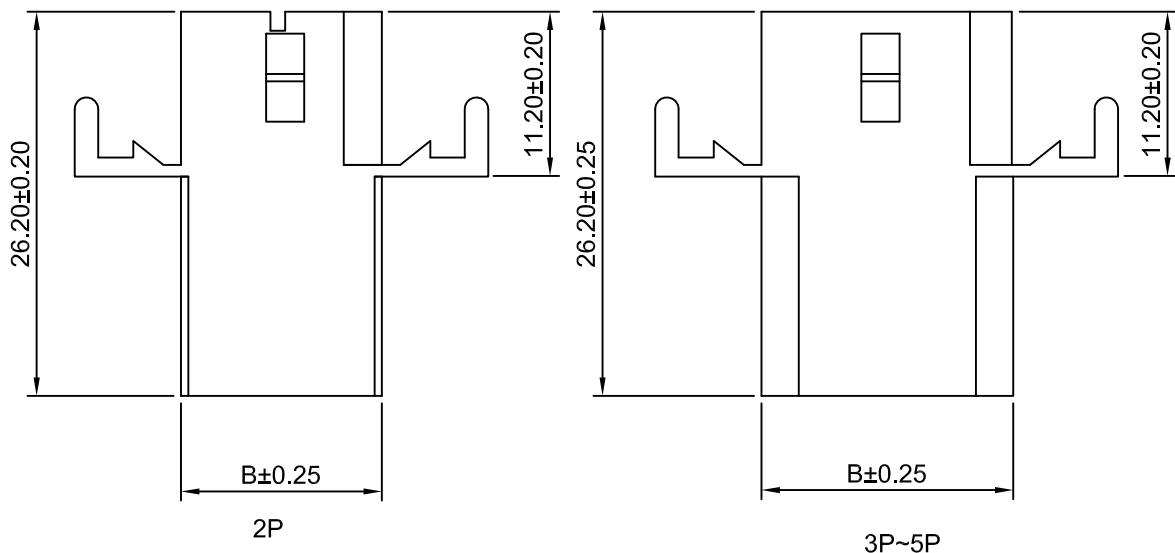

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	6.30	13.70	4P	15.09	22.20
3P	10.06	17.17	5P	20.12	27.23

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1			
DRAWN	CHK'D	APPR	5.03mm PITCH HOUSING		
Chengbiao Ye	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV A1
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
			C5030HFB-XP		

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

