
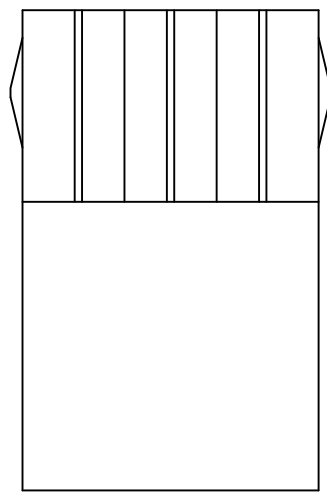
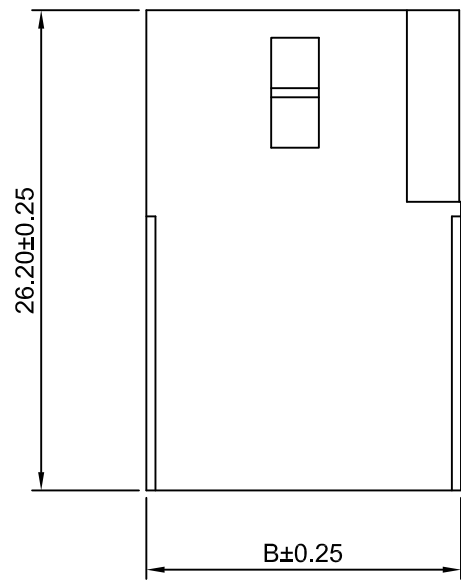


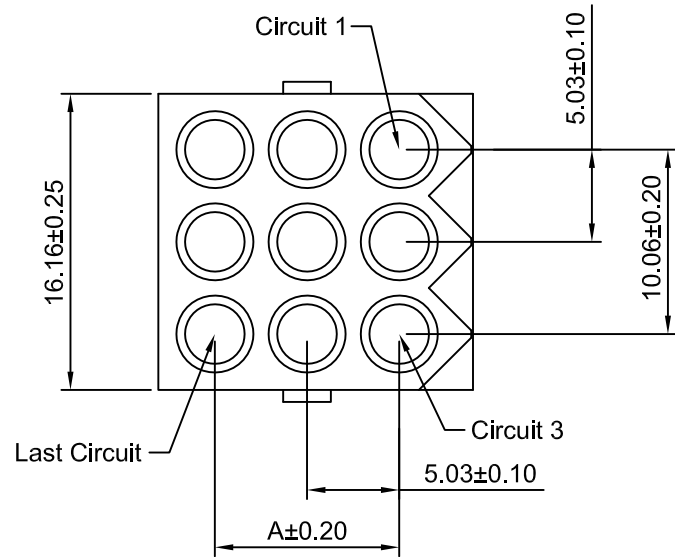

Ordering Information:

C5030HFC-3xXP - **

1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3x2P	5.03	11.14	3x4P	15.09	22.20
3x3P	10.06	17.17	3x5P	20.12	27.23

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 5.03mm PITCH HOUSING		
mm		2.5:1		1 of 1				
DRWN		CHK'D		APPR				
2	Chengbiao Ye		DianKui Wan		Jack Yin		DRAWING NO. C5030HFC-3xXP	REV A3
3	General Tolerances		THIRD ANGLE PROJECTION					
1	x.xx±0.25							
0	x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							

A3	CHANGE THE DRAWING	2023.07.12
A2	CHANGE THE DRAWING	2021.02.03
A1	CHANGE THE SIZE	2018.11.01
A0	NEW RELEASE	2015.04.10
REV	DESCRIPTION	DATE