
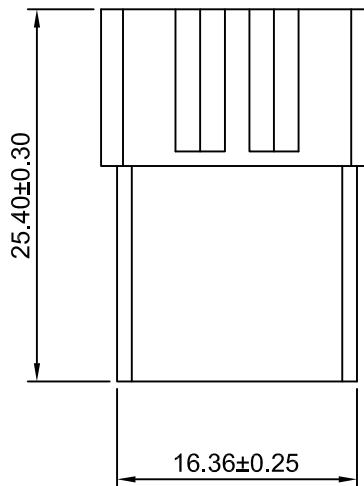
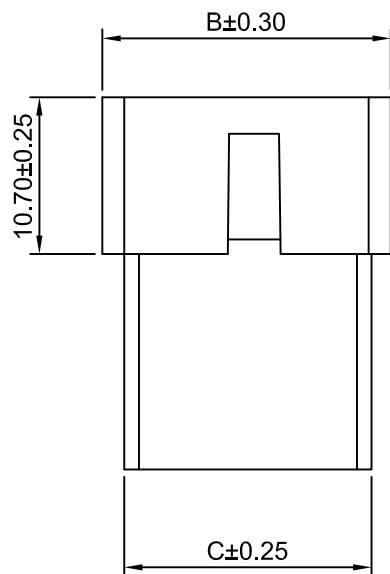


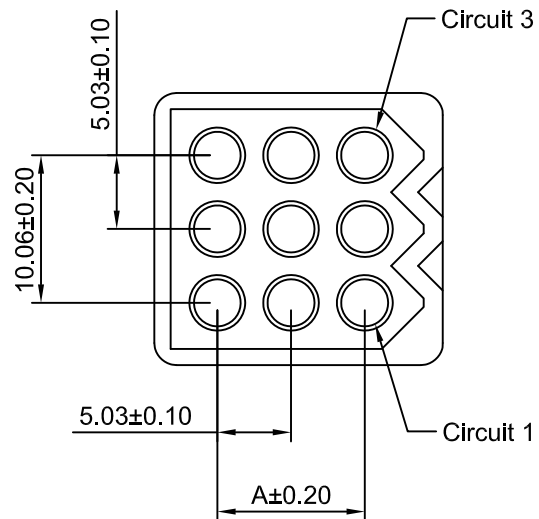

Ordering Information:
C5030HMC-3xXP - **
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

SPECIFICATIONS:

Current Rating: 12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C5030HMC-3x2P	5.03	13.60	11.84
C5030HMC-3x3P	10.06	19.67	16.87
C5030HMC-3x4P	15.09	24.70	21.90
C5030HMC-3x5P	20.12	29.73	26.93

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 5.03mm PITCH HOUSING			
mm		2:1		1 of 1					
DRAWN		CHK'D		APPR					
Chengbiao Ye		Diankui Wan		Jack Yin		DRAWING NO. C5030HMC-3xXP		REV A1	
General Tolerances		THIRD ANGLE PROJECTION							
x,x±0.25 x,x.x±0.20 x,x.xxx±0.15 ANGLES ±1°									