

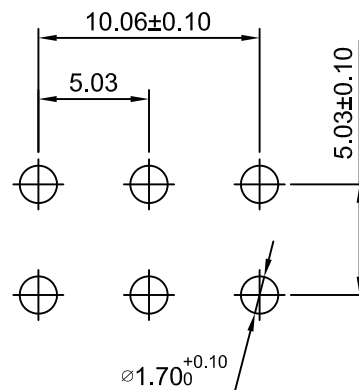
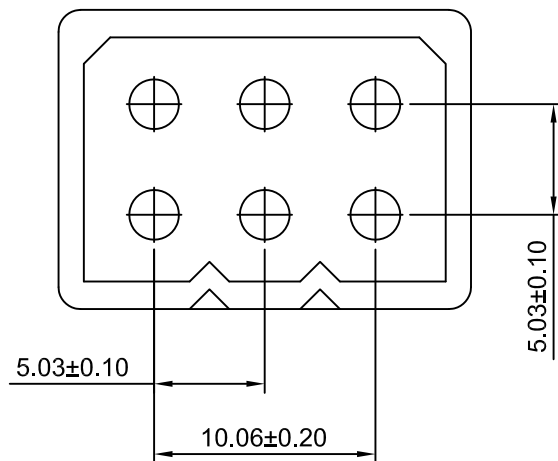


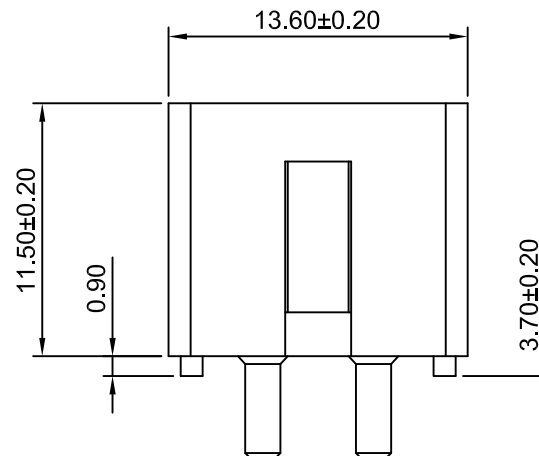

P.C.B LAYOUT
TOLERANCE:±0.05

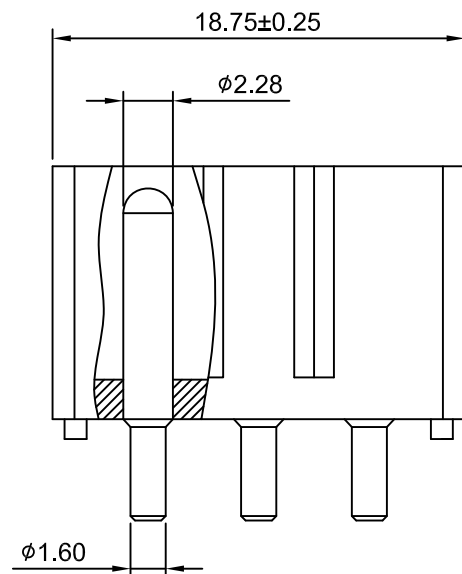

Ordering Information:

C5030WV-3x2P - *** - ***

1 2 3

1.Part NO.

2.Material & Color:

(Blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)


GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

BK: Nylon 66,UL94V-0 (Black)

3.Finish:

(Blank): Gold over Nickel

T: Tin over Nickel



SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 5.03mm PITCH TRIPLE ROW WAFER	
mm		3:1		1 of 1			
DRWN		CHK'D		APPR			
Dengchun Yi		Dlankul Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. C5030WV-3x2P	
x.xx±0.25							
x.xxx±0.20							
x.xxxx±0.15							
ANGLES ±1°				REV A2			

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2021.03.08
A1	ADD THE INFORMATION	2020.04.07
A0	NEW RELEASE	2005.05.10