

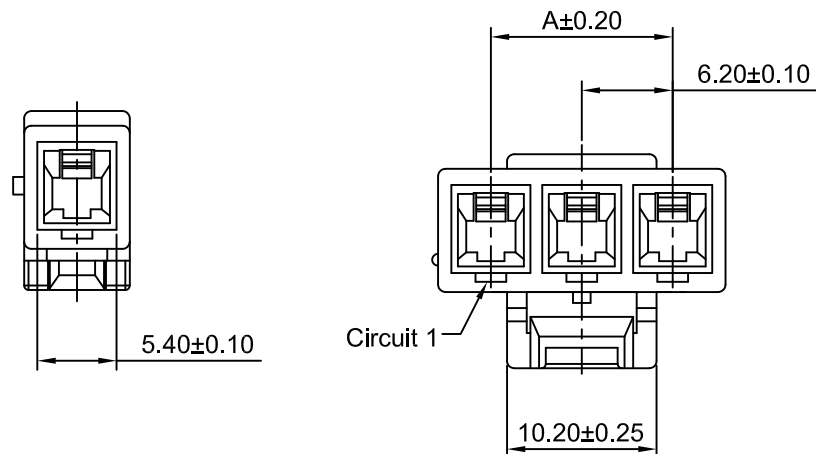
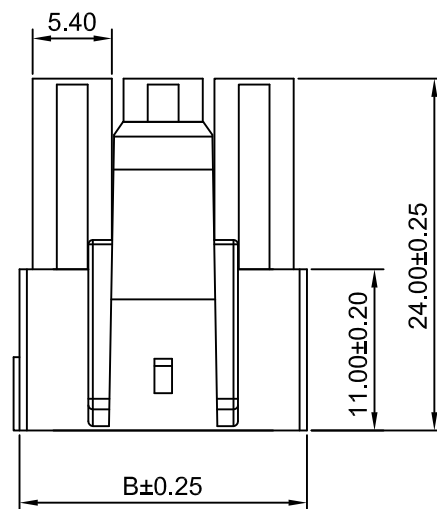


1P

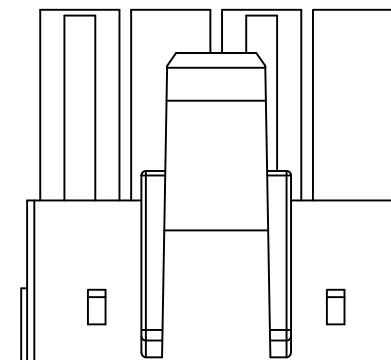

2P~3P



4P

Ordering Information:

C6201HF-XP - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): White

BK: Black

RD: Red

BL: Blue

YL: Yellow

GN: Green

BR: Brown

GY: Gray

SPECIFICATIONS:

Current Rating:23A AC,DC(2 Circuits/AWG#12,Maximum current up to 23A when using the High Conductive Copper Alloy series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩMax.

Insulation Resistance: 1000MΩMin.

Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
1P	---	7.20	3P	12.40	19.60
2P	6.20	13.40	4P	18.60	25.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	6.20mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin	DRAWING NO. C6201HF-XP		
General Tolerances					REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION		

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.01.20
A2	CHANGE THE DRAWING	2021.11.25
A1	MODIFY DRAWING	2021.06.23
A0	NEW RELEASE	2015.04.23