
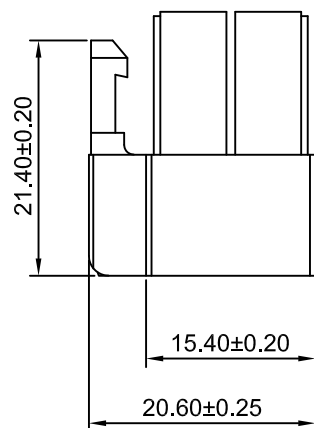
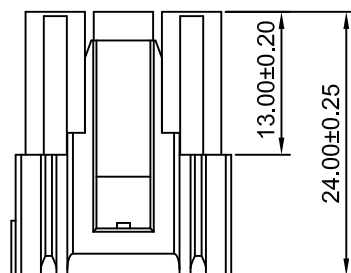


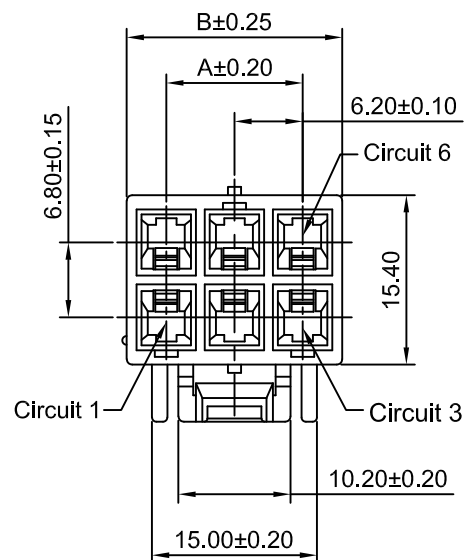

SPECIFICATIONS:

Current Rating: 20A AC, DC

Voltage Rating: 600V AC, DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $7\text{m}\Omega$ Max.

Insulation Resistance: $100\text{M}\Omega$ Min.









Withstanding Voltage: 2000V AC/minute

Material: Nylon 66, UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions (mm)	
	A	B
C6201HFA-2x2P	6.20	13.40
C6201HFA-2x3P	12.40	19.60
C6201HFA-2x4P	18.60	25.80
C6201HFA-2x6P	31.00	38.20

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	1.5:1	1 of 2	6.20mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x,xx±0,25 x,xx±0,20 x,xxx±0,15 ANGLES ±1°			DRAWING NO.	REV A3
			C6201HFA-2xXP	

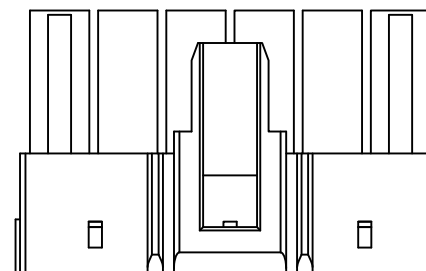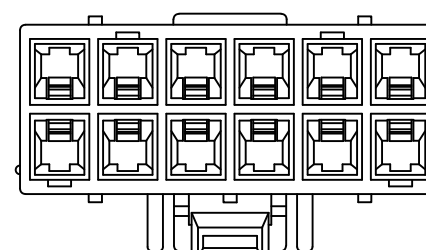

2x2P

2x3P

2x4P

2x6P

A3	CHANGE THE DRAWING	2022.04.22
A2	CHANGE THE DRAWING	2022.01.15
A1	CHANGE THE DRAWING	2020.12.09
A0	NEW RELEASE	2010.01.23
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 6.20mm PITCH HOUSING	
mm	1.5:1	2 of 2		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C6201HFA-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
		REV A3		