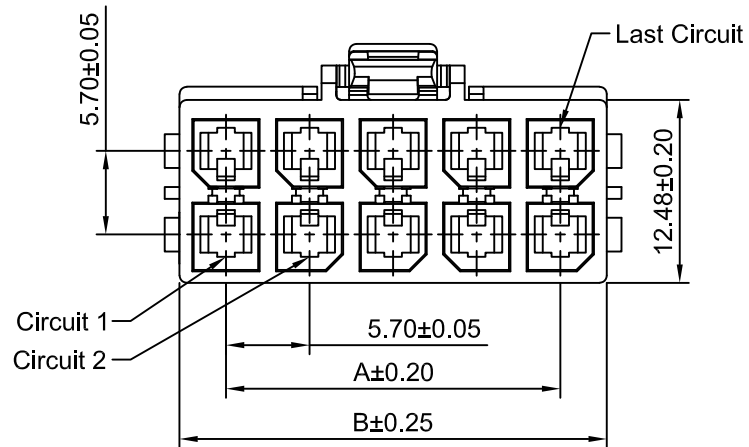


SPECIFICATIONS:

Current Rating: 23.5A AC, DC
 Voltage Rating: 600V AC, DC
 Temperature Range: $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$
 Contact Resistance: $7\text{m}\Omega$ Max.
 Insulation Resistance: $100\text{M}\Omega$ Min.
 Withstanding Voltage: 2000V AC/minute
 Material: Nylon 66, UL94V-0 (Black), IEC 60335-1, 5th Edition Glow Wire Capable.

Ordering Information & Dimensions


Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
2x1P	--	8.35	2x7P	34.20	40.55
2x2P	5.70	12.05	2x8P	39.90	46.25
2x3P	11.40	17.75	2x9P	45.60	51.95
2x4P	17.10	23.45	2x10P	51.30	57.65
2x5P	22.80	29.15	2x11P	57.00	63.35
2x6P	28.50	34.85	2x12P	62.70	69.05


CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit		Scale		Sheet	
mm		2:1		1 of 2	
DRWN		CHK'D		APPR	
Wenmin Luo		Diankui Wan		Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION		5.70mm PITCH HOUSING TPA	
x.xx±0.25					
x.xxx±0.20					
x.xxxx±0.15					
ANGLES ±1°				DRAWING NO.	
				C6201HFG-2xXP	
				REV A2	

A2	CHANGE THE DRAWING	2022.03.31
A1	CHANGE THE DRAWING	2022.01.11
A0	NEW RELEASE	2020.12.20
REV	DESCRIPTION	DATE


General Tolerances	THIRD ANGLE PROJECTION
x.xx $\pm$ 0.25	
x.xxx $\pm$ 0.20	
x.xxxx $\pm$ 0.15	
ANGLES $\pm 1^{\circ}$	

DRAWING NO.		REV A2
C6201HFG-2xXP		

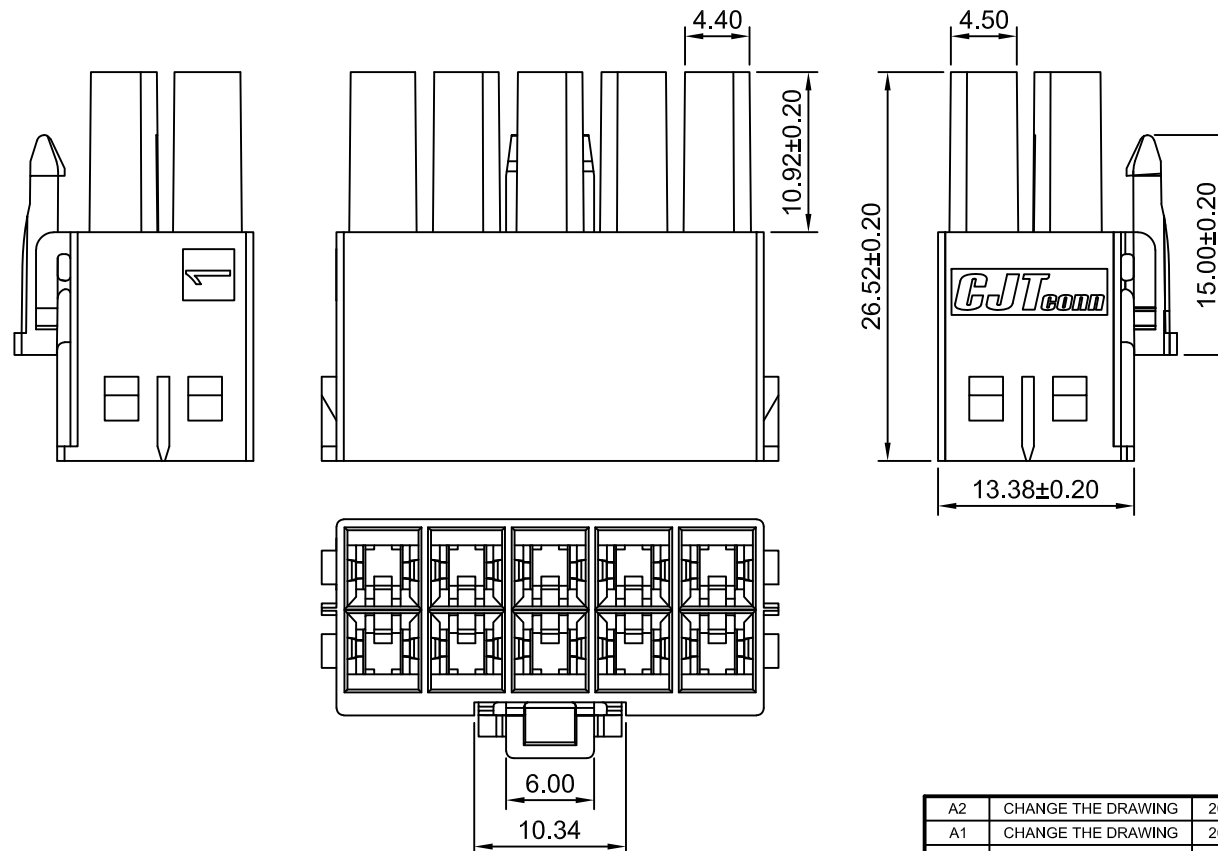





2X1P




2X3P




2X5P

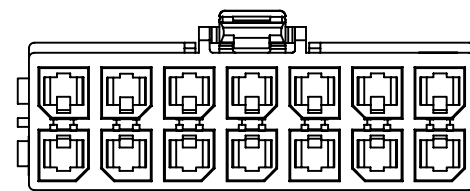


2X7P




2X2P




2X4P

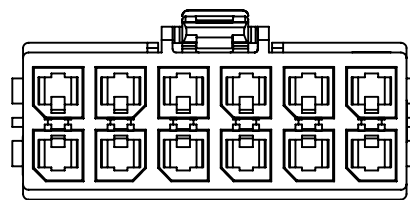


2X6P

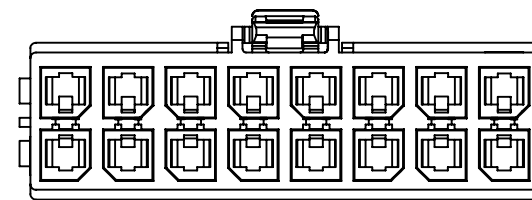


2X8P

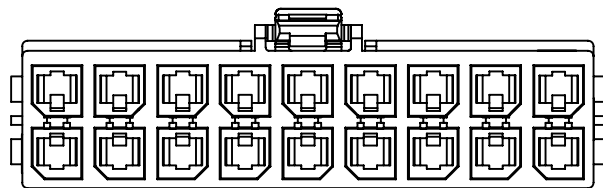


2X9P

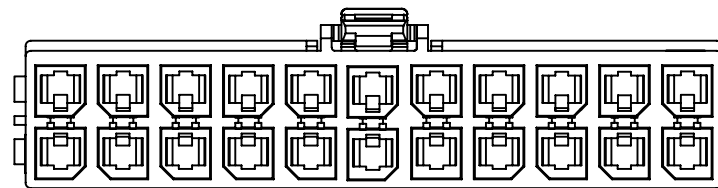

2X11P

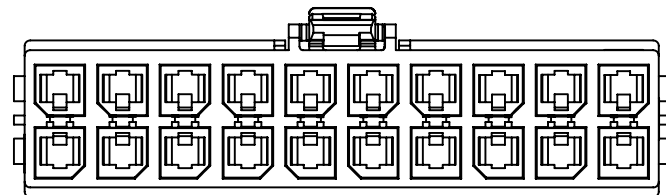

2X10P

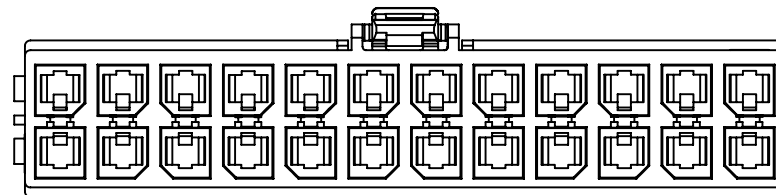

2X12P

A2	CHANGE THE DRAWING	2022.03.31
A1	CHANGE THE DRAWING	2022.01.11
A0	NEW RELEASE	2020.12.20
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			5.70mm PITCH HOUSING TPA DRAWING NO. C6201HFG-2xXP		REV A2
Unit	Scale	Sheet			
mm	1.5:1	2 of 2			
DRWN Wenmin Luo	CHK'D Diankui Wan	APPR Jack Yin			
General Tolerances x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION 		