
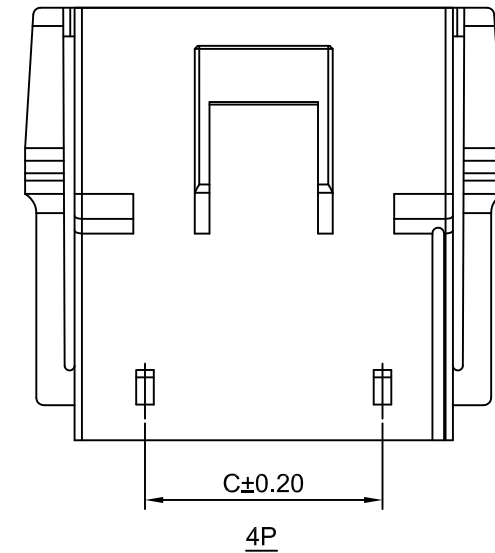


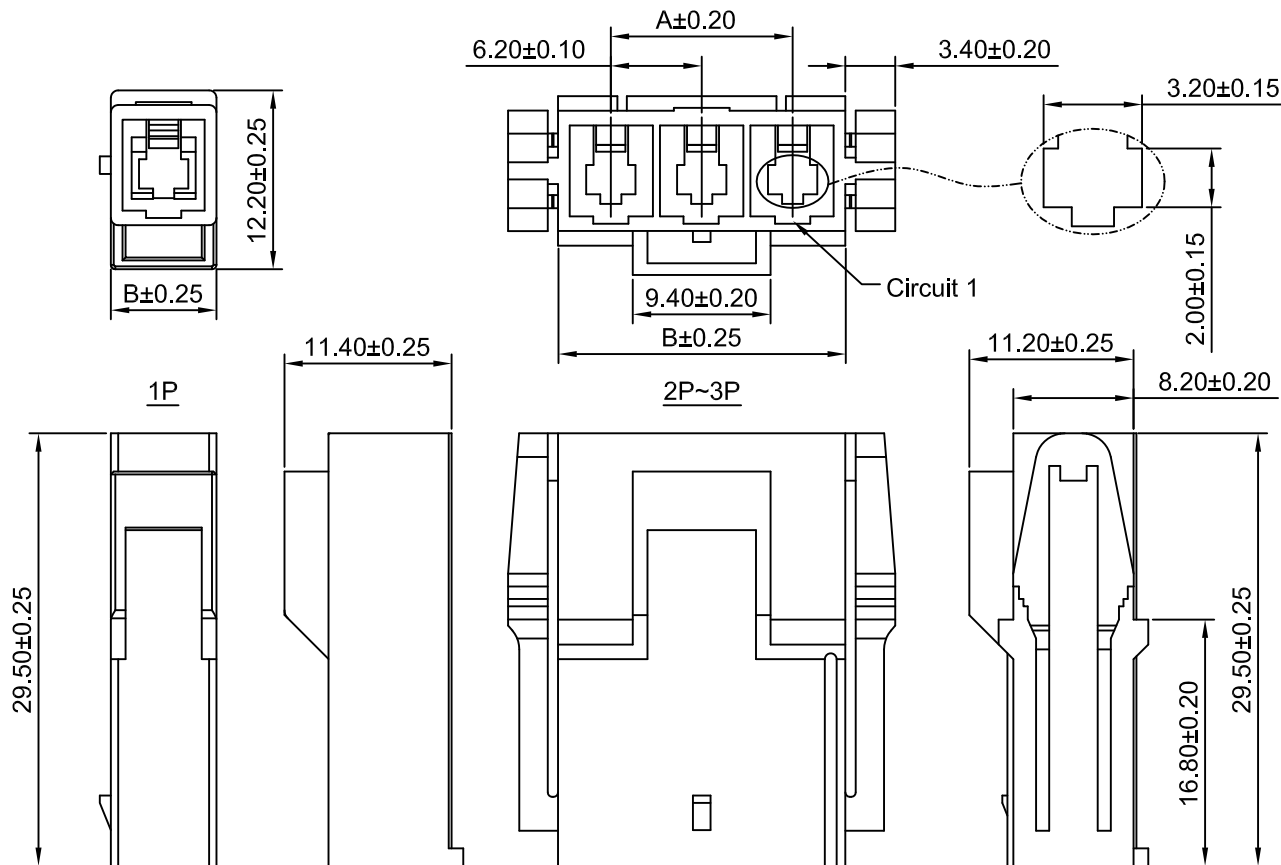

SPECIFICATIONS:

Current Rating: 23A AC, DC (2 Circuits/AWG#12, Maximum current up to 23A when using the High Conductive Copper Alloy series terminal)
Voltage Rating: 600V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions


Part NO.	Dimensions(mm)		
	A	B	C
C6201HM-1P	---	7.20	---
C6201HM-2P	6.20	13.40	---
C6201HM-3P	12.40	19.60	---
C6201HM-4P	18.60	25.80	16.20

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 6.20mm PITCH HOUSING	
mm	2:1	1 of 1		
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A5
x.xx±0.25				
x.xxx±0.20				
x.xxxx±0.15				
ANGLES ±1°				
		C6201HM-XP		


Ordering Information:

C6201HM-XP - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$

- Part NO.
- Material:
(Blank): Nylon 66, UL94V-0 (White)
GWT: Nylon 66, UL94V-0 (Beige), IEC 60335-1, 5th Edition
Glow Wire Capable.
- Color:
(Blank): see section 2 material
BK: Black BL: Blue
RD: Red YL: Yellow
GN: Green BR: Brown
GY: Gray



A5	MODIFY DRAWING	2022.08.02
A4	MODIFY DRAWING	2022.07.14
A3	MODIFY DRAWING	2022.06.20
A2	MODIFY DRAWING	2022.05.23
A1	MODIFY DRAWING	2021.06.23
A0	NEW RELEASE	2015.04.23
REV	DESCRIPTION	DATE

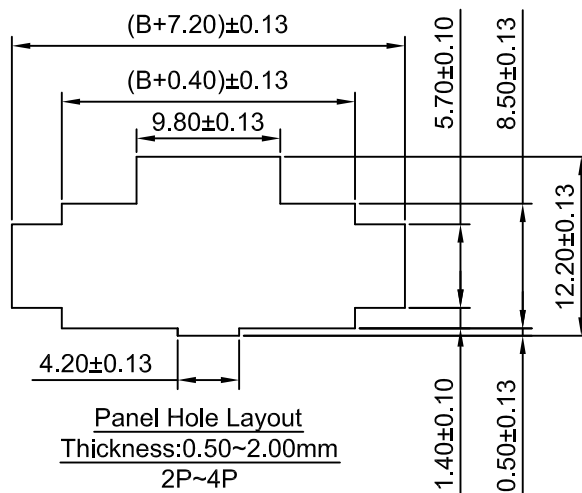

Panel Hole Layout
Thickness: 0.50~2.00mm
2P~4P