

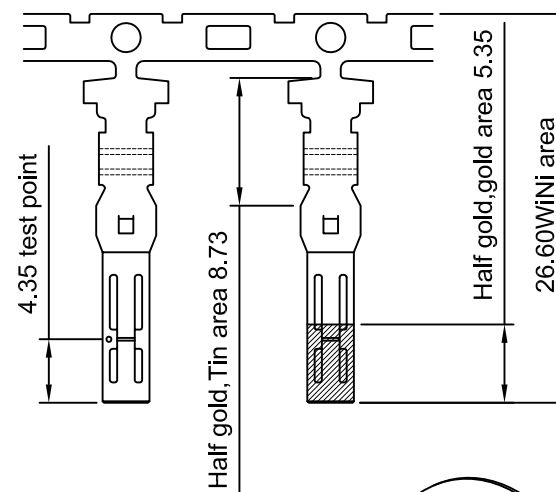
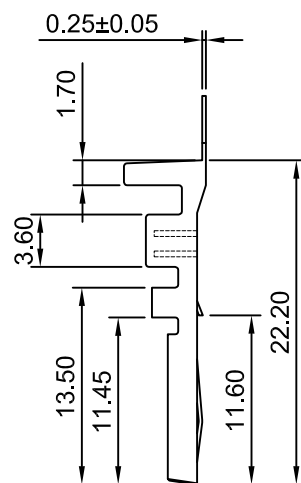
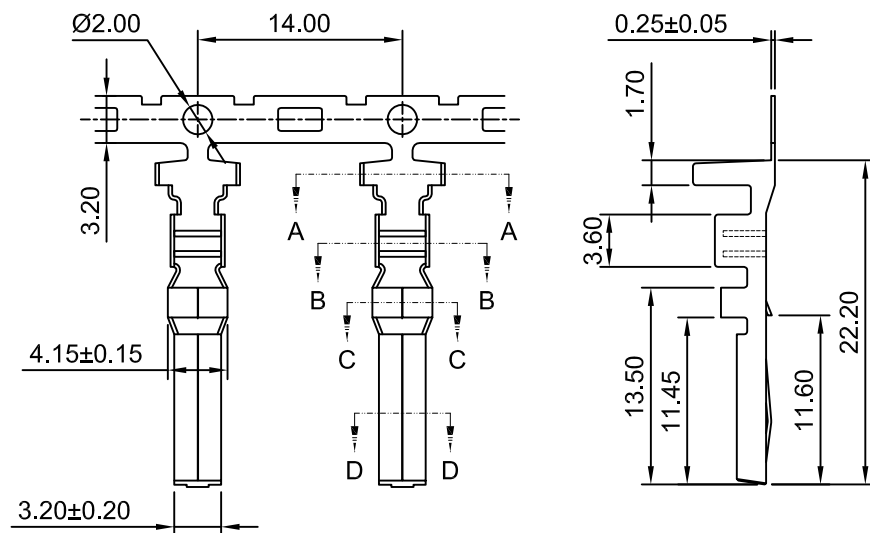



SEC:A-A

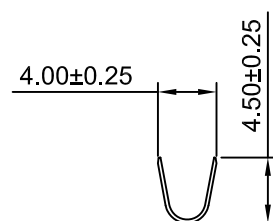


SEC:B-B



SEC:C-C



SEC:D-D

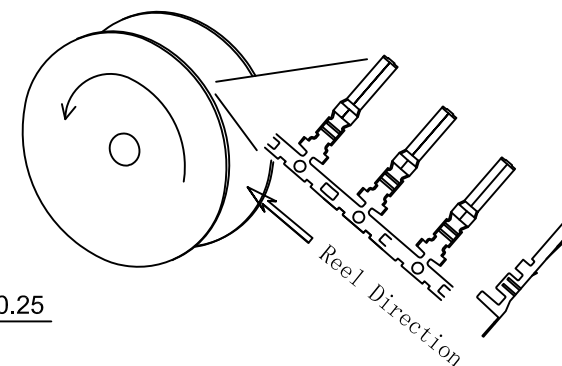

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6201M-TP-H	AWG#12	4.10mm(max)	Phosphor Bronze	Tin over Nickel	3,000 PCS
C6201M-GP-H	AWG#12	4.10mm(max)	Phosphor Bronze	Gold over Nickel	3,000 PCS
C6201M-TCA-H	AWG#12	4.10mm(max)	High conductive copper alloy	Tin over Nickel	3,000 PCS
C6201M-GCA-H	AWG#12	4.10mm(max)	High conductive copper alloy	Gold over Nickel	3,000 PCS

A2	CHANGE THE DRAWING	2023.01.07
A1	MODIFY DRAWING	2022.01.21
A0	NEW RELEASE	2005.07.20
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	3.00mm PITCH CRIMP TERMINAL
DRWN	CHK'D	APPR	
Chengbiao Ye	Diankui Wan	Jack Yin	
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO. C6201M-T-H
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			REV A2