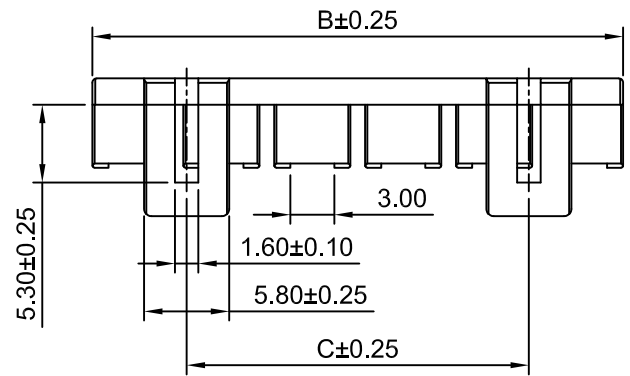


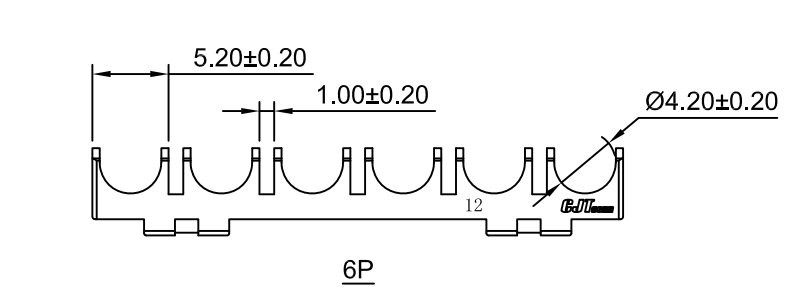
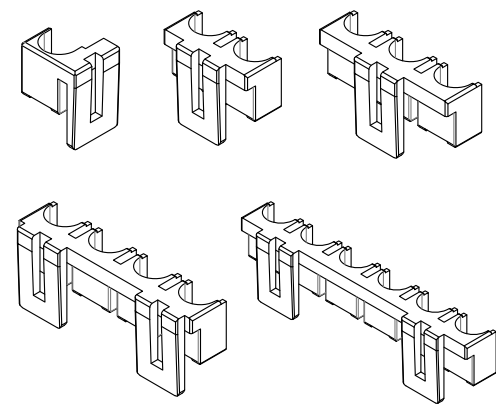
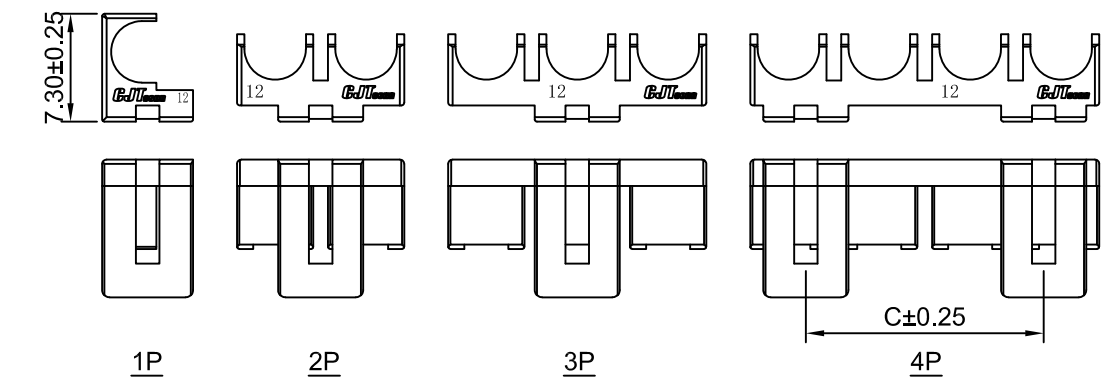


SPECIFICATIONS:
 Current Rating: 20A AC, DC
 Voltage Rating: 600V AC, DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 7mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 2000V AC/minute
 Material: Nylon 66, UL94V-0 (Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
C6201S-1P-IV	--	6.20	--
C6201S-2P-IV	6.20	11.40	--
C6201S-3P-IV	12.40	17.60	--
C6201S-4P-IV	18.60	23.80	16.22
C6201S-6P-IV	31.00	36.20	23.34

CHANGJIANG CONNECTORS CO., LTD.

Unit mm	Scale 2:1	Sheet 1 of 1	6.20mm PITCH Retainer	
DRWN Wenmin Luo	CHK'D Diankui Wan	APPR Jack Yin		
General Tolerances x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
THIRD ANGLE PROJECTION			DRAWING NO. C6201S-XP-IV	REV A1

A1	MODIFY DRAWING	2021.08.09
A0	NEW RELEASE	2015.04.23
REV	DESCRIPTION	DATE