


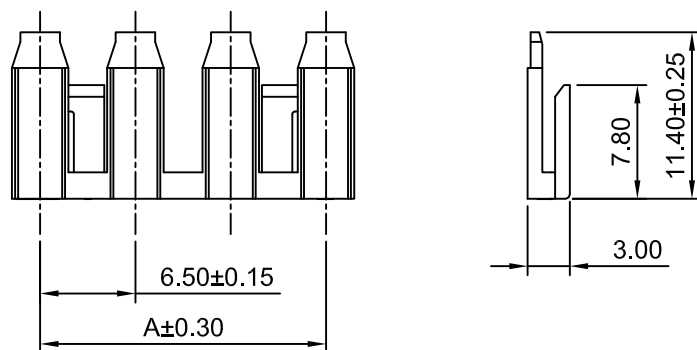





4P

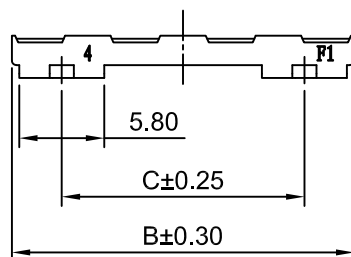

2P



3P

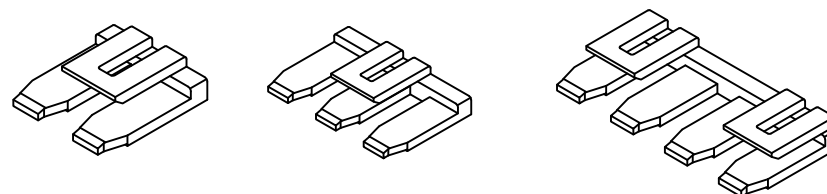

SPECIFICATIONS:

Current Rating: 15A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
C6201HFC-2P	6.50	10.40	
C6201HFC-3P	13.00	16.90	
C6201HFC-4P	19.50	23.40	16.60

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	6.50mm PITCH RETAINER	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.	REV A0
			C6201SC-XP	