
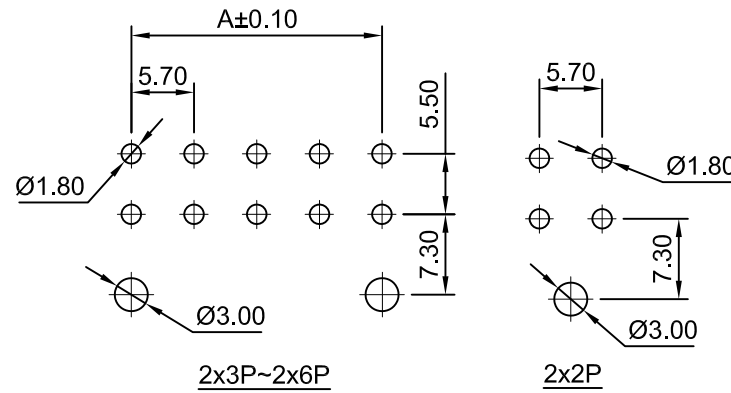
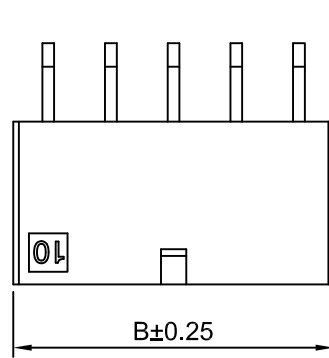
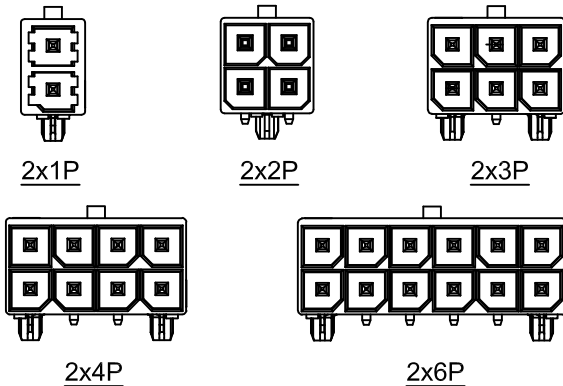
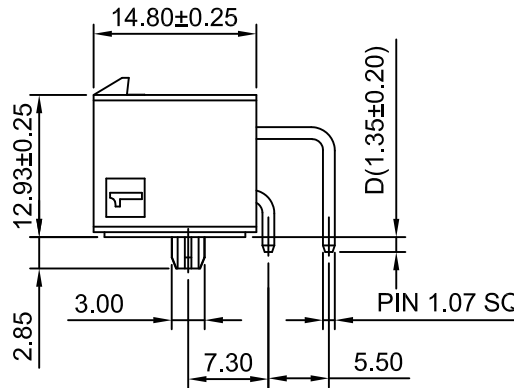


P.C.B LAYOUT
TOLERANCE:±0.05

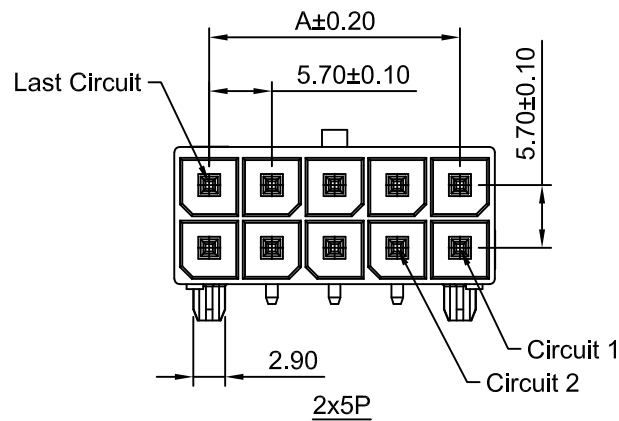

SPECIFICATIONS:

Current Rating:23A AC,DC (MAX)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +120°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute
Pin Material: High conductive Brass/Tin over Nickel
Material:LCP,UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	8.35	2x4P	17.10	23.45
2x2P	5.70	12.05	2x5P	22.80	29.15
2x3P	11.40	17.75	2x6P	28.50	34.85

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1.5:1	1 of 1	5.70mm PITCH 90° DUAL ROW WAFER		
DRWN	CHK'D	APPR			
Dengchun Yi	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			C6201WRB-F-2xXP-D14		A0

A0	NEW RELEASE	2020.11.04
REV	DESCRIPTION	DATE

Ordering Information:

C6201WRB-F-2xXP - ** - ** - D14 - ** - **
1 2 3 4 5

1.Part No.

2.Halogen:

(blank):Normal Material

HF: Halogen Free

3.Finish:

(blank): Tin over Nickel

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

4.Packing:

(blank): Tray

RE: Tape & Reel

5.Logo & Marking:

(blank):With Mark

NK:Without Mark