

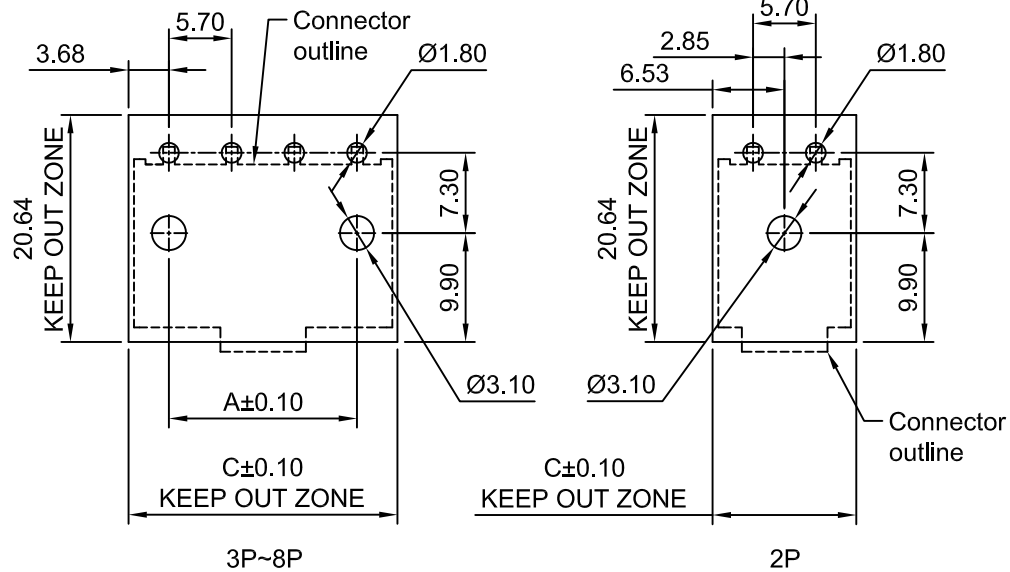

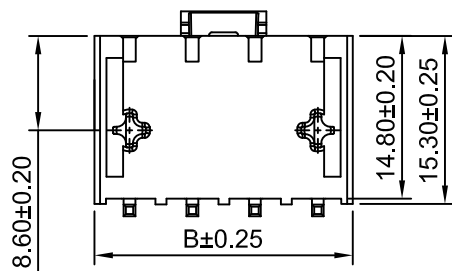
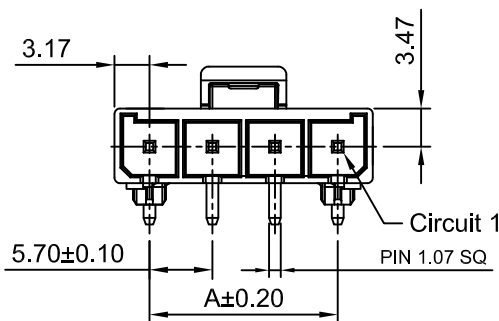


LAST CKT
(Just for 3P
or more)



P.C.B LAYOUT: COMPONENT SIDE
THICKNESS: 1.58MM~2.36MM
TOLERANCE: ±0.05

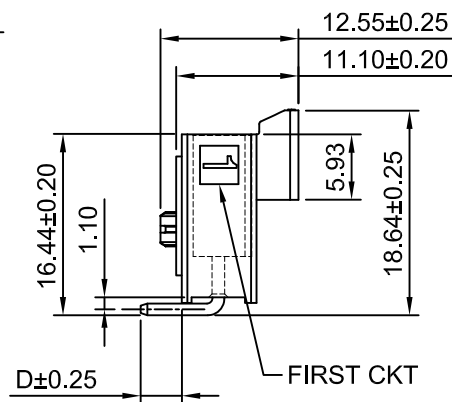

Ordering Information:
C6201WRB-F-XP - ** - ** - ** - ** - **
1 2 3 4 5 6

- Part NO.
- Pin Material:
(Blank): Copper Alloy
B: Brass
- Halogen:
(Blank): Normal Material
HF: Halogen Free
- Finish: see Sheet 2, Note 2.
- Size D:
(Blank): 3.23mm
D36: 3.60mm
D45: 4.50mm
- Packing:
(Blank): Tray
RE: Tape & Reel


SPECIFICATIONS:

Current Rating: 26A AC, DC (MAX)
Voltage Rating: 600V AC, DC
Temperature Range: -40°C ~ +120°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute
Material: LCP, UL94V-0 (Black)


Ordering Information & Dimensions

Part No.	Dimensions (mm)		
	A	B	C
C6201WRB-F-2P	5.70	12.05	13.05
C6201WRB-F-3P	11.40	17.75	18.75
C6201WRB-F-4P	17.10	23.45	24.45
C6201WRB-F-5P	22.80	29.15	30.15
C6201WRB-F-6P	28.50	34.85	35.85
C6201WRB-F-7P	34.20	40.55	41.55
C6201WRB-F-8P	39.90	46.25	47.25


CJTconn CHANGJIANG CONNECTORS CO., LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 2	5.70mm PITCH RIGHT-ANGLE DUAL ROW HEADER
DRN	CHK	APVD	
Chengbiao Ye	Dian Kui Wan	Jack Yin	
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C6201WRB-F-XP
REV	DESCRIPTION	DATE	REV
A3	MODIFY DRAWING	2023.04.19	A3
A2	MODIFY DRAWING	2023.02.07	
A1	CHANGE THE DRAWING	2022.03.31	
A0	NEW RELEASE	2021.08.24	




2P








3P




4P




5P

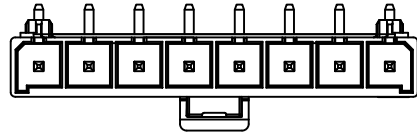





8P

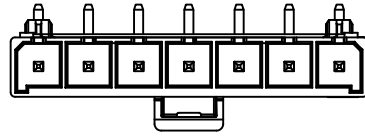

7P



6P

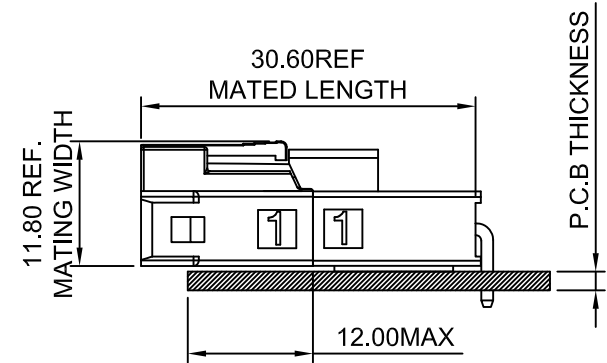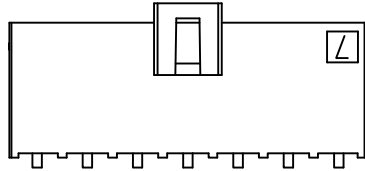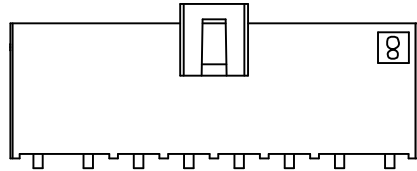

ASSEMBLY LAYOUT
MATED WITH C6201HFB-XP

Notes:

1.Material

Housing: LCP,UL94V-0 and Glow Wire Capable Per IEC 60335-1,5th Edition.

Terminal: High Conductivity copper/Brass.

2.Finish

(Blank): 1.52 μ m(60u") reflowed Matte Tin over 1.27 μ m(50u") Min Nickel over all.

G: 0.025 μ m(1u") Gold over 1.27 μ m(50u") Min Nickel.

G3: 0.076 μ m(3u") Gold over 1.27 μ m(50u") Min Nickel.

G15: 0.38 μ m(15u") selective Gold on Contact area with 2.54 μ m(100u") selective Tin on Solder area both over 1.27 μ m(50u") Min Nickel over all.

G30: 0.76 μ m(30u") selective Gold on Contact area with 2.54 μ m(100u") selective Tin on Solder area both over 1.27 μ m(50u") Min Nickel over all.

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 2	5.70mm PITCH RIGHT-ANGLE DUAL ROW HEADER
DRN	CHK	APVD	
Chengbiao Ye	DianKui Wan	Jack Yin	
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO
x.xx $\pm$ 0.25 x.xxx $\pm$ 0.20 x.xxxx $\pm$ 0.15 ANGLES $\pm$ 1°			C6201WRB-F-XP
REV			REV A3

A3	MODIFY DRAWING	2023.04.19
A2	MODIFY DRAWING	2023.02.07
A1	CHANGE THE DRAWING	2022.03.31
A0	NEW RELEASE	2021.08.24
REV	DESCRIPTION	DATE