


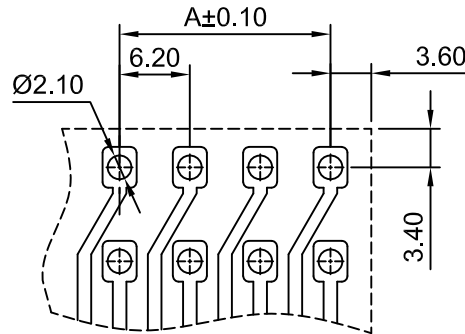
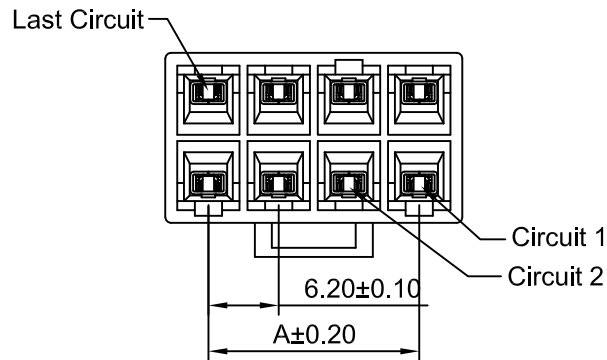

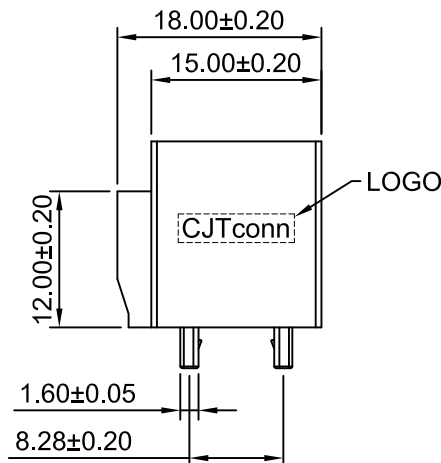


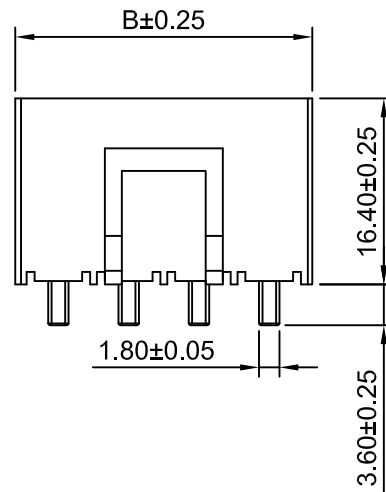


P.C.B LAYOUT
TOLERANCE:±0.05



2x2P



2x3P

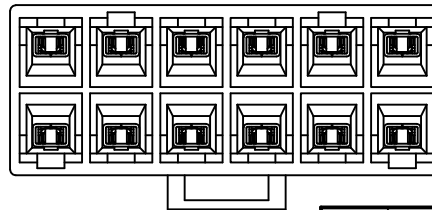

2x6P

Ordering Information:

C6201WV-2xXP - *** - *** - ** - *
1 2 3 4 5

- Part NO.
- Housing Material:
(Blank): Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- Pin Material:
(Blank): Phosphor Bronze
HCS: Copper Alloy
- Color:
(Blank): see section 2 Material
BK: Black BL: Blue
RD: Red UV: Ultraviolet
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating:23A AC,DC(2 Circuits/AWG#12)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6201WV-2x2P	6.20	13.40
C6201WV-2x3P	12.40	19.60
C6201WV-2x4P	18.60	25.80
C6201WV-2x6P	31.00	38.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 6.20mm PITCH VERTICAL DUAL ROW HEADER		
mm	1.5:1	1 of 1			
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO. C6201WV-2xXP		
General Tolerances		THIRD ANGLE PROJECTION			
x,xx±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°					
REV	DESCRIPTION	DATE	REV A3		