

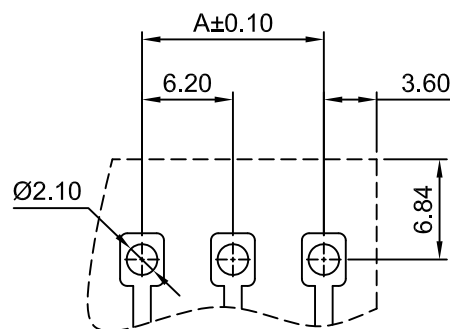
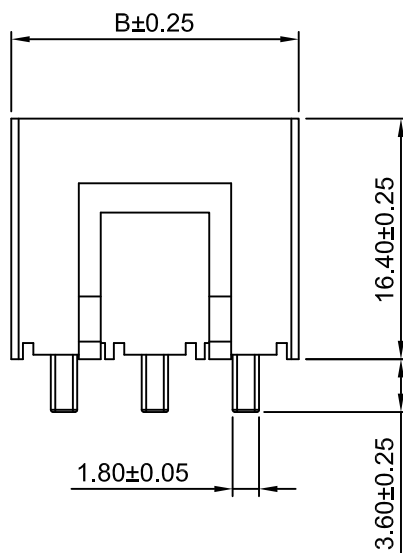
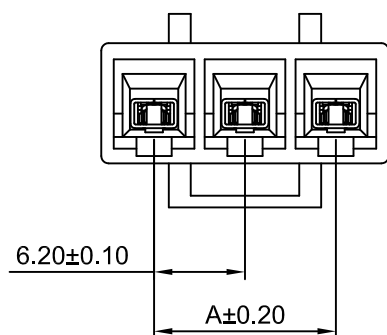





P.C.B LAYOUT
TOLERANCE:±0.05

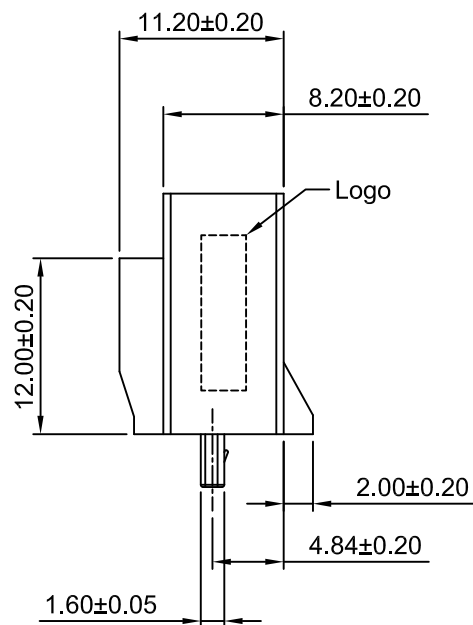

Ordering Information:

C6201WV-XP - *** - *** - ** - *
1 2 3 4 5

- Part NO.
- Housing Material:
(Blank): Nylon 66, UL94V-0(White)
GWT: Nylon 66, UL94V-0(Beige),
IEC 60335-1, 5th Edition
Glow Wire Capable.
- Pin Material:
(Blank): Phosphor Bronze
HCS: Copper Alloy
- Color:
(Blank): see section 2 Material
BK: Black BL: Blue
RD: Red UV: Ultraviolet
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
G3: Gold over Nickel(Au:3u" Mating area)

SPECIFICATIONS:

Current Rating: 23A AC, DC (2 Circuits/AWG#12)
Voltage Rating: 600V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6201WV-2P	6.20	13.40
C6201WV-3P	12.40	19.60
C6201WV-4P	18.60	25.80

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	6.20mm PITCH VERTICAL SINGLE ROW HEADER
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			C6201WV-XP
			REV A4

A4	CHANGE THE DRAWING	2022.02.16
A3	CHANGE THE DRAWING	2021.11.10
A2	MODIFY DRAWING	2021.08.28
A1	ADD THE INFORMATION	2020.05.13
A0	NEW RELEASE	2010.01.23
REV	DESCRIPTION	DATE