

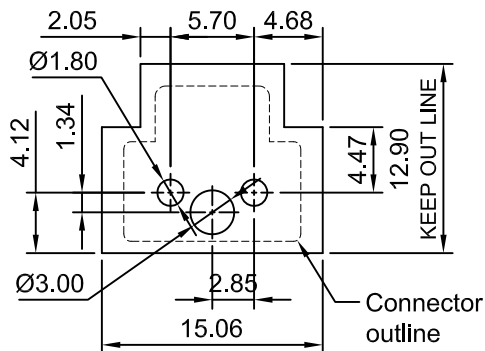
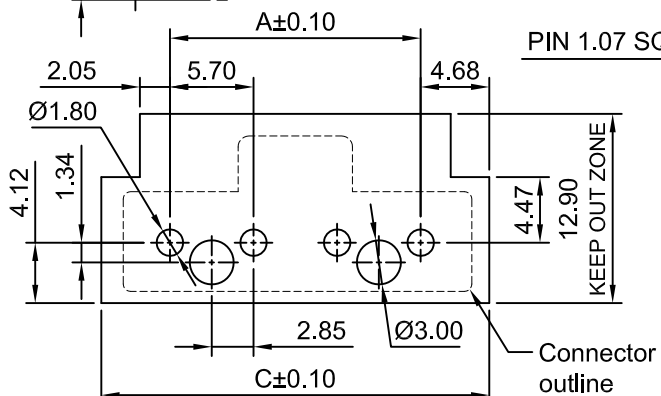
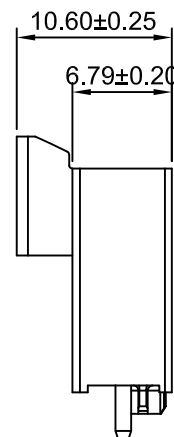


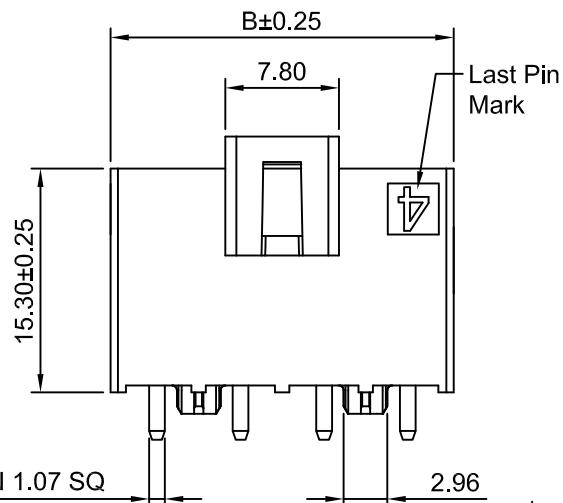

P.C.B LAYOUT: COMPONENT SIDE (2P)

THICKNESS: 1.58MM~2.36MM


TOLERANCE: ±0.05

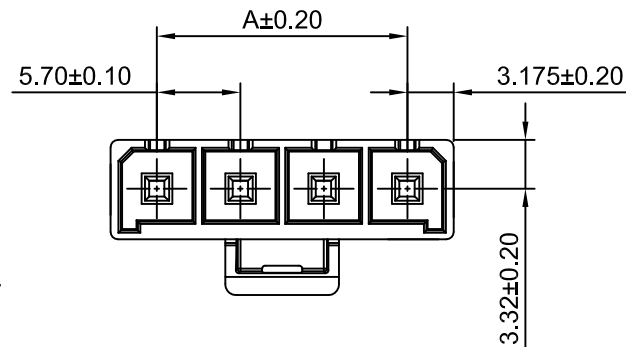

P.C.B LAYOUT: COMPONENT SIDE (3P~8P)

THICKNESS: 1.58MM~2.36MM

TOLERANCE: ±0.05

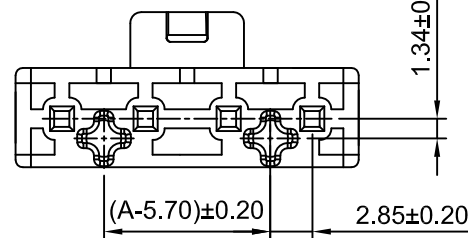

Ordering Information:

C6201WVB-F-XP - $\frac{**}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$ - $\frac{**}{4}$ - $\frac{**}{5}$ - $\frac{**}{6}$

1. Part NO.

2. Pin Material:

(Blank): Copper Alloy
B: Brass

3. Halogen:

(Blank): Normal Material
HF: Halogen Free

4. Finish: see Sheet 2, Note 2.

5. Size D:

(Blank): 3.23mm
D36: 3.60mm
D45: 4.50mm

6. Packing:

(Blank): Tray
RE: Tape & Reel
CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 26A AC, DC (MAX)

Voltage Rating: 600V AC, DC

Temperature Range: -40°C ~ +120°C

Contact Resistance: 7mΩMax.

Insulation Resistance: 1000MΩMin.

Withstanding Voltage: 2000V AC/minute

Material: LCP, UL94V-0 (Black)



Ordering Information & Dimensions

Part No.	Dimensions (mm)		
	A	B	C
C6201WVB-F-2P	5.70	12.05	15.06
C6201WVB-F-3P	11.40	17.75	20.76
C6201WVB-F-4P	17.10	23.45	26.46
C6201WVB-F-5P	22.80	29.15	32.16
C6201WVB-F-6P	28.50	34.85	37.86
C6201WVB-F-7P	34.20	40.55	43.56
C6201WVB-F-8P	39.90	46.25	49.26

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2		
DRN	CHK	APVD	5.70mm PITCH VERTICAL DUAL ROW HEADER	
Dengchun Yi	DianKui Wan	Jack Yin		
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO C6201WVB-F-XP	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			REV A1	

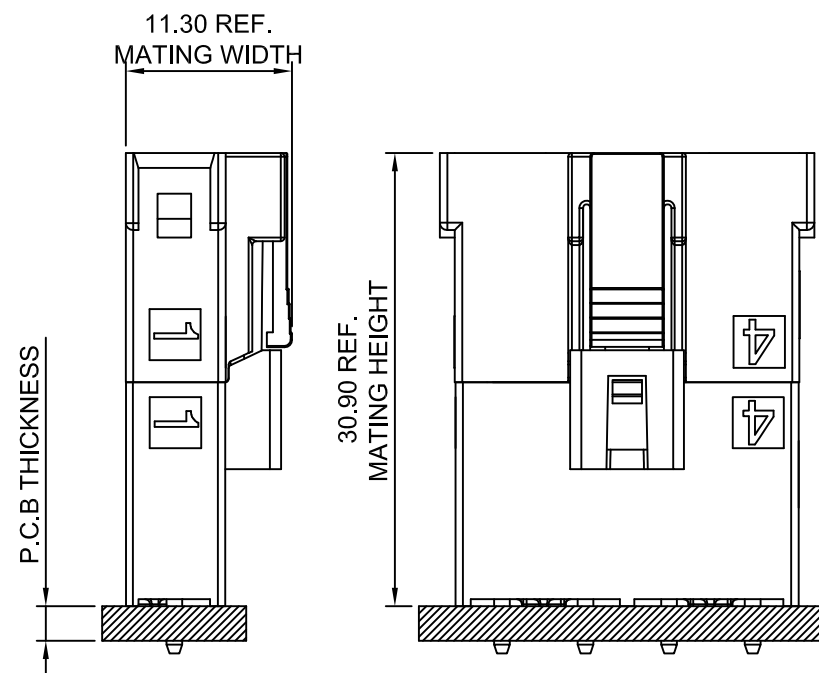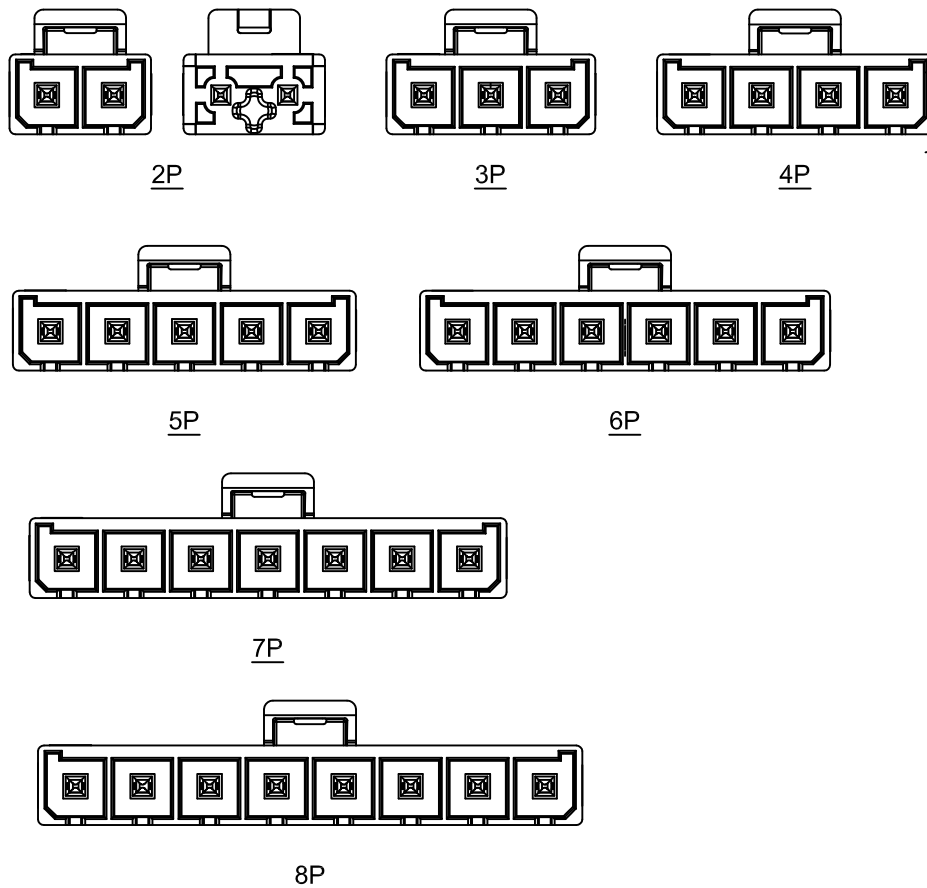

ASSEMBLY LAYOUT
MATED WITH C6201HFB-XP

Notes:

1.Material

Housing: LCP,UL94V-0 and Glow Wire Capable Per IEC 60335-1,5th Edition.

Terminal: High Conductivity copper/Brass.

2.Finish

(Blank): 1.52 μ m(60u") reflowed Matte Tin over 1.27 μ m(50u") Min Nickel over all.

G: 0.025 μ m(1u") Gold over 1.27 μ m(50u") Min Nickel.

G3: 0.076 μ m(3u") Gold over 1.27 μ m(50u") Min Nickel.

G15: 0.38 μ m(15u") selective Gold on Contact area with 2.54 μ m(100u") selective Tin on Solder area both over 1.27 μ m(50u") Min Nickel over all.

G30: 0.76 μ m(30u") selective Gold on Contact area with 2.54 μ m(100u") selective Tin on Solder area both over 1.27 μ m(50u") Min Nickel over all.

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2022.03.31
A0	NEW RELEASE	2021.08.24

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	2 of 2	5.70mm PITCH VERTICAL DUAL ROW HEADER		
DRN	CHK	APVD			
Dengchun Yi	DianKui Wan	Jack Yin			
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO		REV A1
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
		C6201WVB-F-XP			