
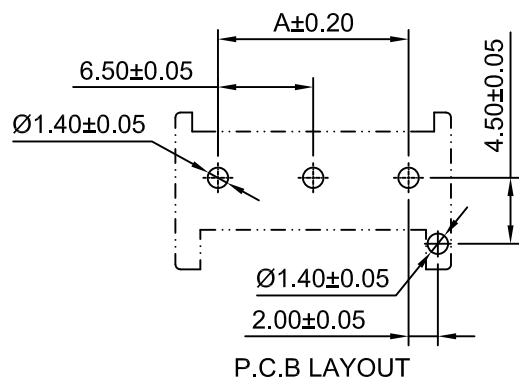
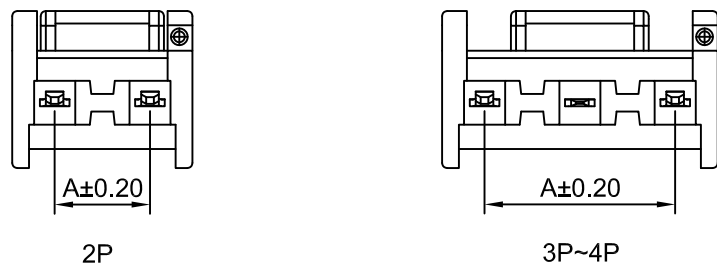


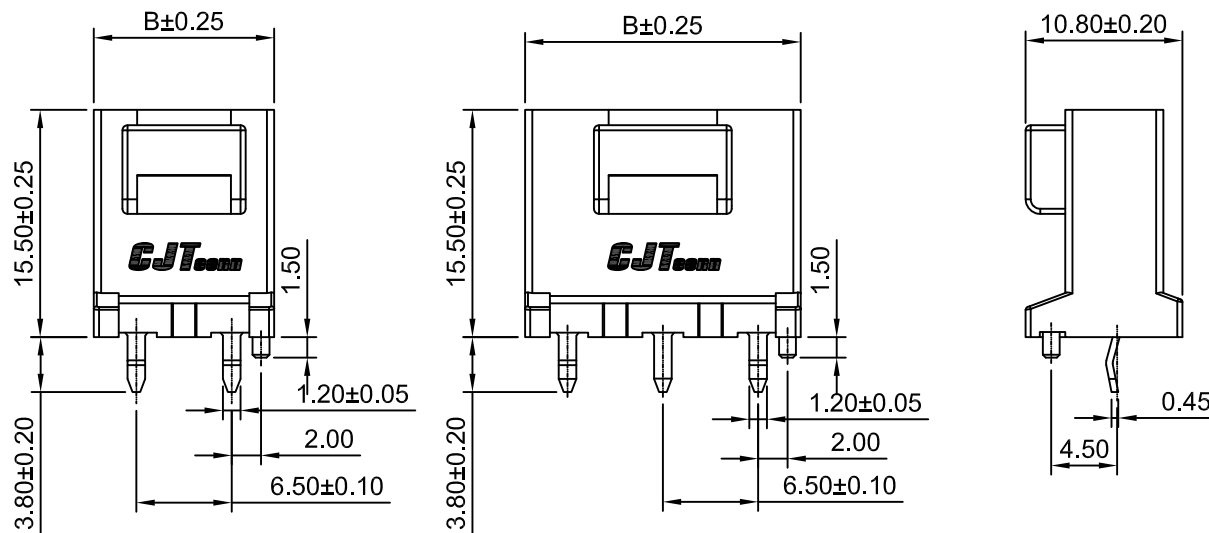

Ordering Information:

C6201WVC-XP - *** - ** - **
1 2 3 4

1.Part No.

2.Material:

(blank):Nylon 66+GF,UL94V-0/Ivory

PBT:PBT+GF,UL94V-0/White

GWT:Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.3.Color:

(blank):Ivory

RD:Red

BK:Black

BL:Blue

YL:Yellow

GN:Green

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

SPECIFICATIONS:

Current Rating:15A AC,DC(2 Circuits/AWG#14)

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩMax.

Insulation Resistance: 1000MΩMin.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material:Nylon 66+GF,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	6.50	12.30	4P	19.50	25.30
3P	13.00	18.80			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	6.50mm PITCH 180° Wafer		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.		
			C6201WVC-XP		
			REV A1		

A1	CHANGE THE DRAWING	2021.03.25
A0	NEW RELEASE	2018.05.25
REV	DESCRIPTION	DATE