
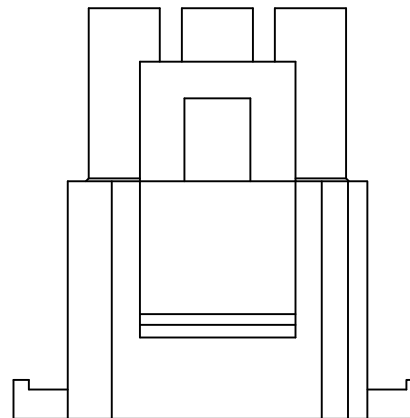
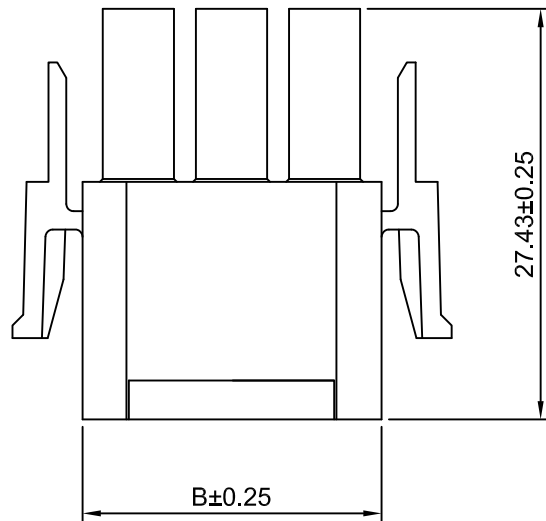


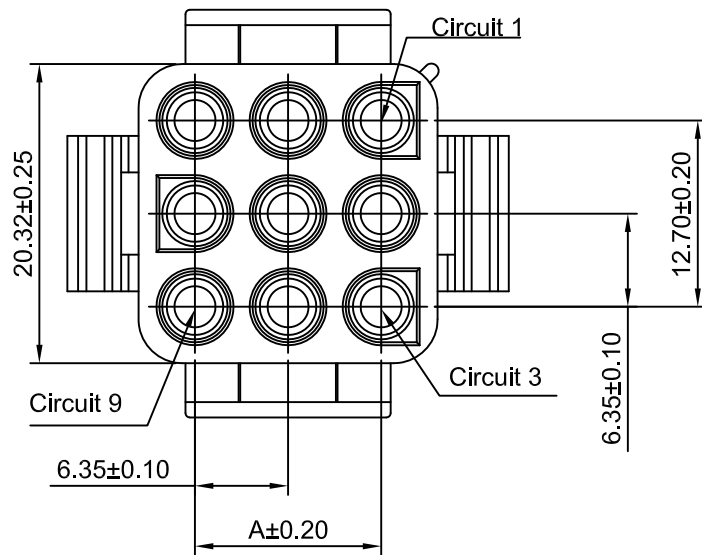

Ordering Information:

C6351HFA-3xXP - *** - **
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

3.Color:

BR:Brown

RD:Red

OR:Orange

YL:Yellow

GN:Green

BL:Blue

GY:Gray

BK:Black

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3x2P	6.35	13.97	3x4P	19.05	26.67
3x3P	12.70	20.32	3x5P	25.40	33.02

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yln

General Tolerance

x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :

6.35mm PITCH

TRIPLE ROW HOUSING

DRAW NO : C6351HFA-3xXP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2015.04.25