

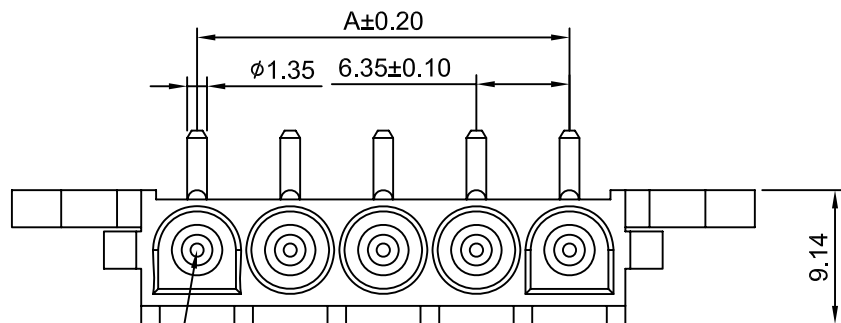
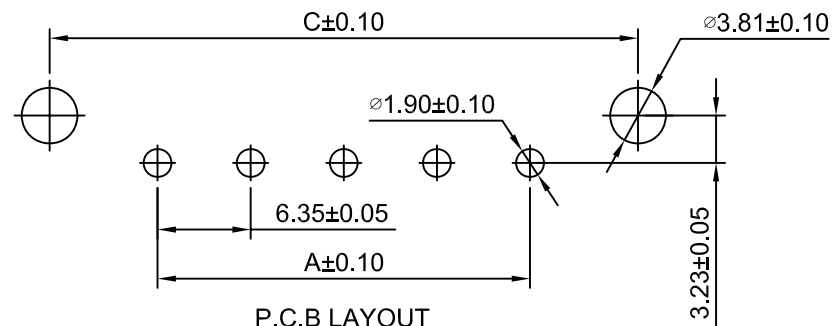


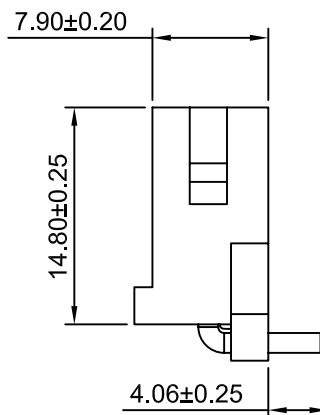

Circuit 1

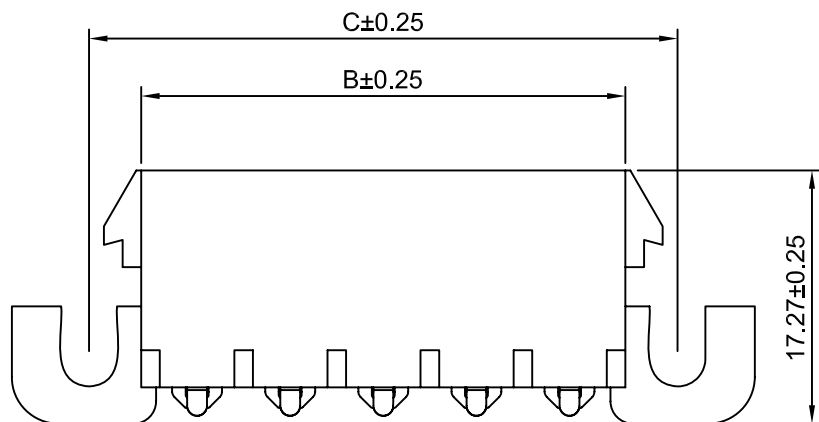

P.C.B LAYOUT

Ordering Information:

C6351WR-XP-R - *** - ***
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(1u")

G2:Gold over Nickel(2u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

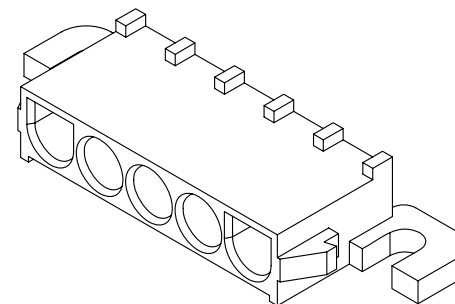

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	6.35	13.97	21.08	7P	38.10	45.72	52.83
3P	12.70	20.32	27.43	8P	44.45	52.07	59.18
4P	19.05	26.67	33.78	9P	50.08	58.42	65.53
5P	25.40	33.02	40.13	10P	57.15	64.77	71.88
6P	31.75	39.37	46.48				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 2:1, Sheet: 1 of 1

Draw BY: Tony Su, Approved: Jack Yin

General Tolerance

ANGLE±, x.x≤0.25, x.xx≤0.20, x.xxx≤0.15

Title : 6.35mm PITCH
90° SINGLE ROW WAFER
Round Pin-Male Type

DRAW NO : C6351WR-XP-R

REV A0

A0	NEW RELEASE	2018.06.01
REV	DESCRIPTION	DATE