

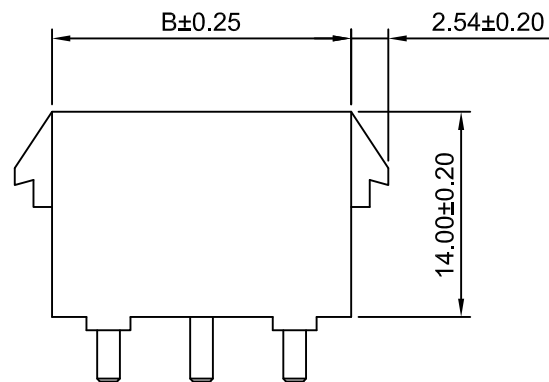


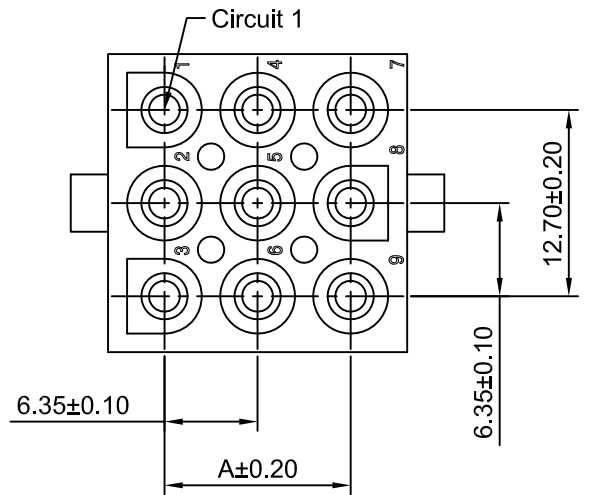

3x3P~3x5P



3x2P

Ordering Information:

C6351WV-3xXP-R - * - ***
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

GWT:Nylon 66,UL94V-0,GWT 750°C




4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel(1u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

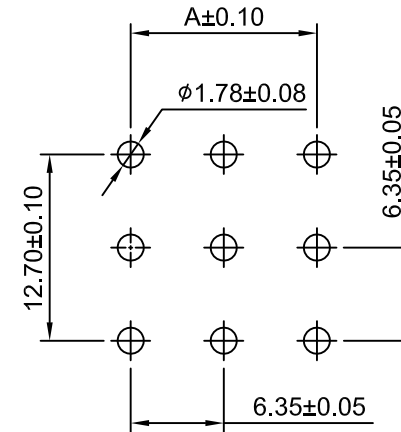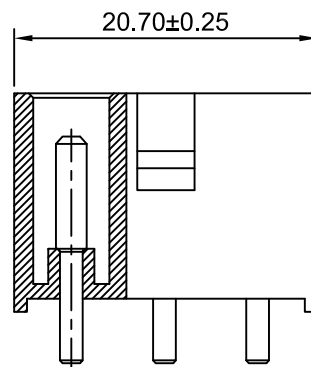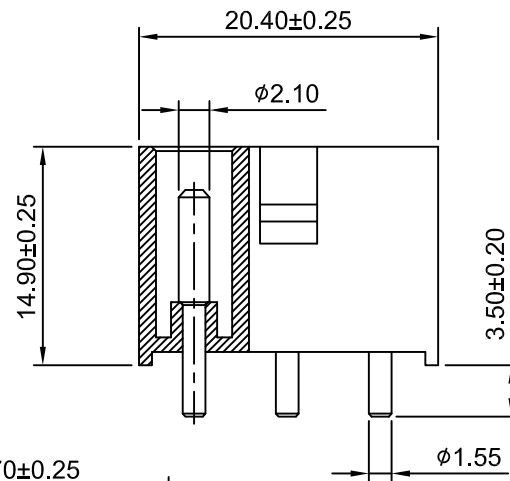

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3x2P	6.35	14.00	3x4P	19.05	27.20
3x3P	12.70	20.40	3x5P	25.40	33.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw By:	Approved :
Dlankul Wan	Jack Yin

General Tolerance

PROJECT
x.xx±0.25 x.xx±0.20 x.xxx±0.15

Title :
6.35mm Pitch
180° Triple Row Wafer,
Round Pin-Male Type

DRAW NO : C6351WV-3xXP-R

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2019.05.21