
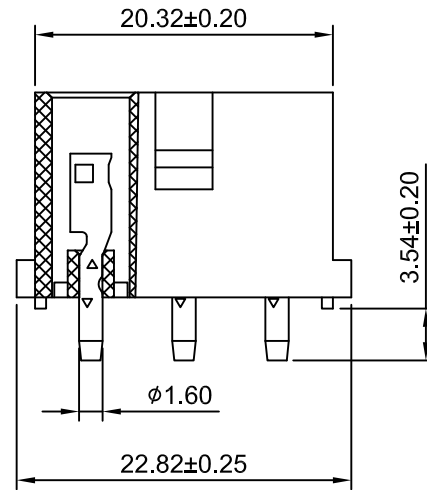
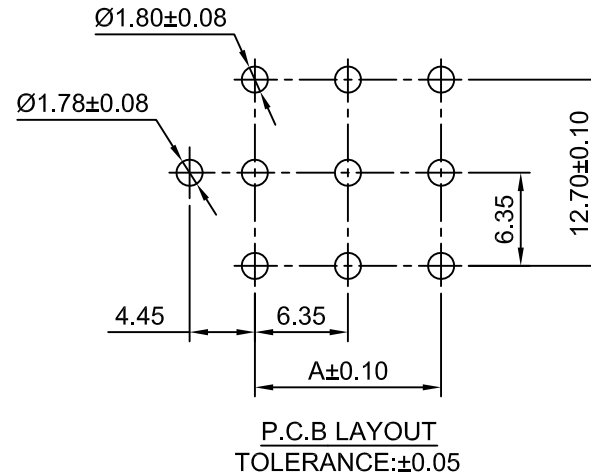
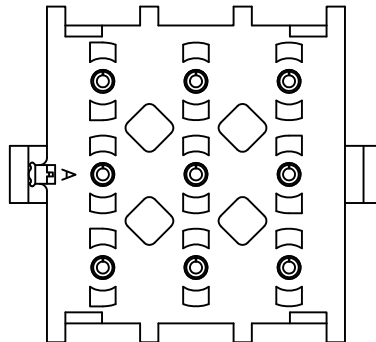
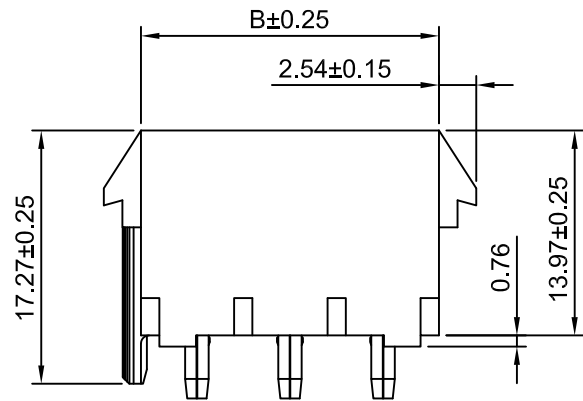


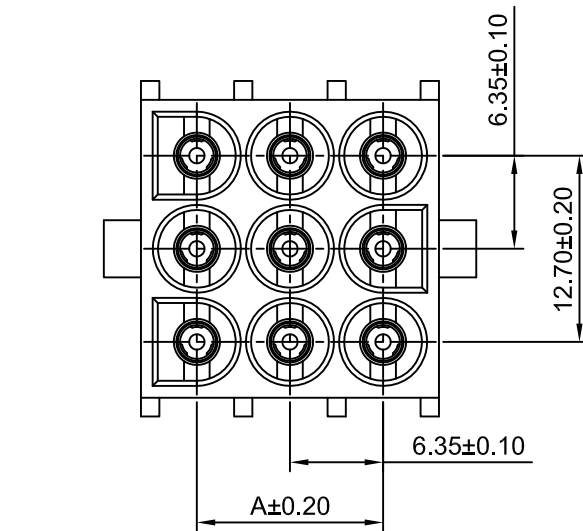

Ordering Information:

C6351WV-F-3xXP-F - *** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:

(blank): Tin over Nickel

G: Gold-flash

G15: 15µin (0.38µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin

G30: 30µin (0.76µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material: Phosphor Bronze/Tin-plated

Material: Nylon 66,UL94V-0 or UL94V-2

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351WV-F-3x2P-F	6.35	13.97
C6351WV-F-3x3P-F	12.70	20.32
C6351WV-F-3x4P-F	19.05	26.67
C6351WV-F-3x5P-F	25.40	33.02

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Djankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x, x±0.25		
x, xx±0.20		
x, xxx±0.15		
ANGLES ±1°		

TITLE		
6.35mm PITCH		
180° TRIPLE ROW WAFER,		
POLARIZING PEG - FEMALE TYPE		
DRAWING NO.		REV
C6351WV-F-3xXP-F		A1

A1	CHANGE THE DRAWING	2020.12.19
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE