
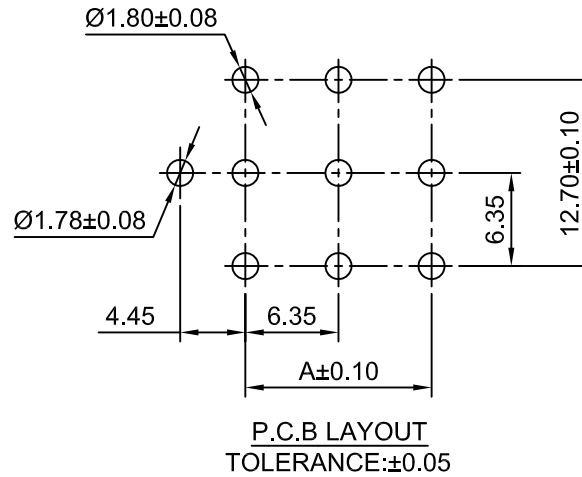


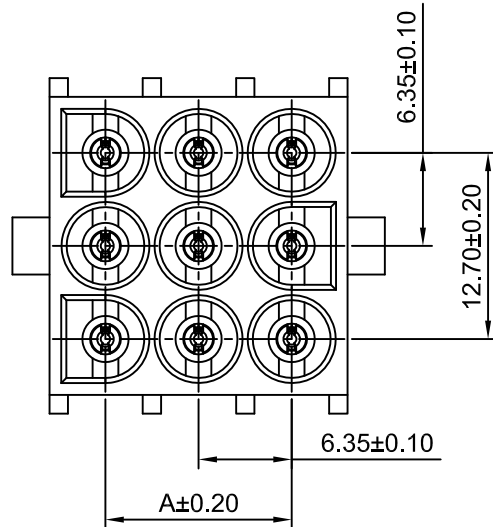

Ordering Information:
C6351WV-F-3xXP-M - *** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.



3.Finish:

(blank): Tin over Nickel

G: Gold-flash

G15: 15µin (0.38µm) MIN.Select Gold(Mating Area)
100µin (2.54µm) MIN.Select Tin

G30: 30µin (0.76µm) MIN.Select Gold(Mating Area)
100µin (2.54µm) MIN.Select Tin

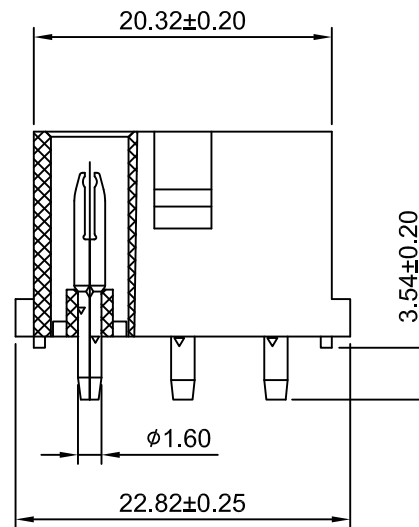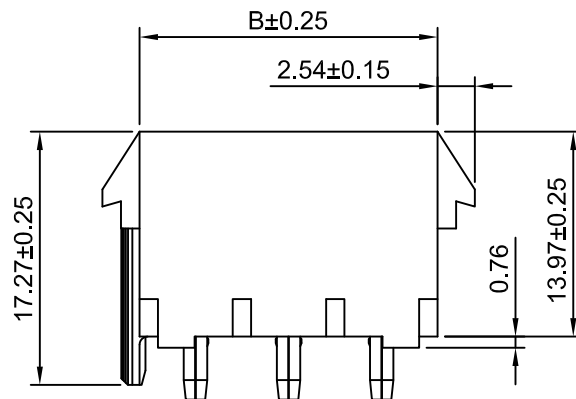

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material: Phosphor Bronze

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351WV-F-3x2P-M	6.35	13.97
C6351WV-F-3x3P-M	12.70	20.32
C6351WV-F-3x4P-M	19.05	26.67
C6351WV-F-3x5P-M	25.40	33.02

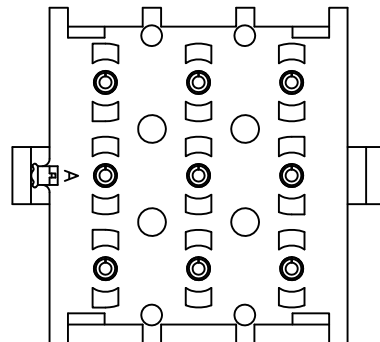

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x,x±0.25		
x,xxx±0.20		
x,xxxx±0.15		
ANGLES ±1°		

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2023.03.06
A2	CHANGE THE DRAWING	2021.03.17
A1	CHANGE THE DRAWING	2020.12.19
A0	NEW RELEASE	2005.05.10

TITLE		
6.35mm PITCH 180° TRIPLE ROW WAFER, POLARIZING PEG - MALE TYPE		
DRAWING NO.		REV
C6351WV-F-3xXP-M		A3