

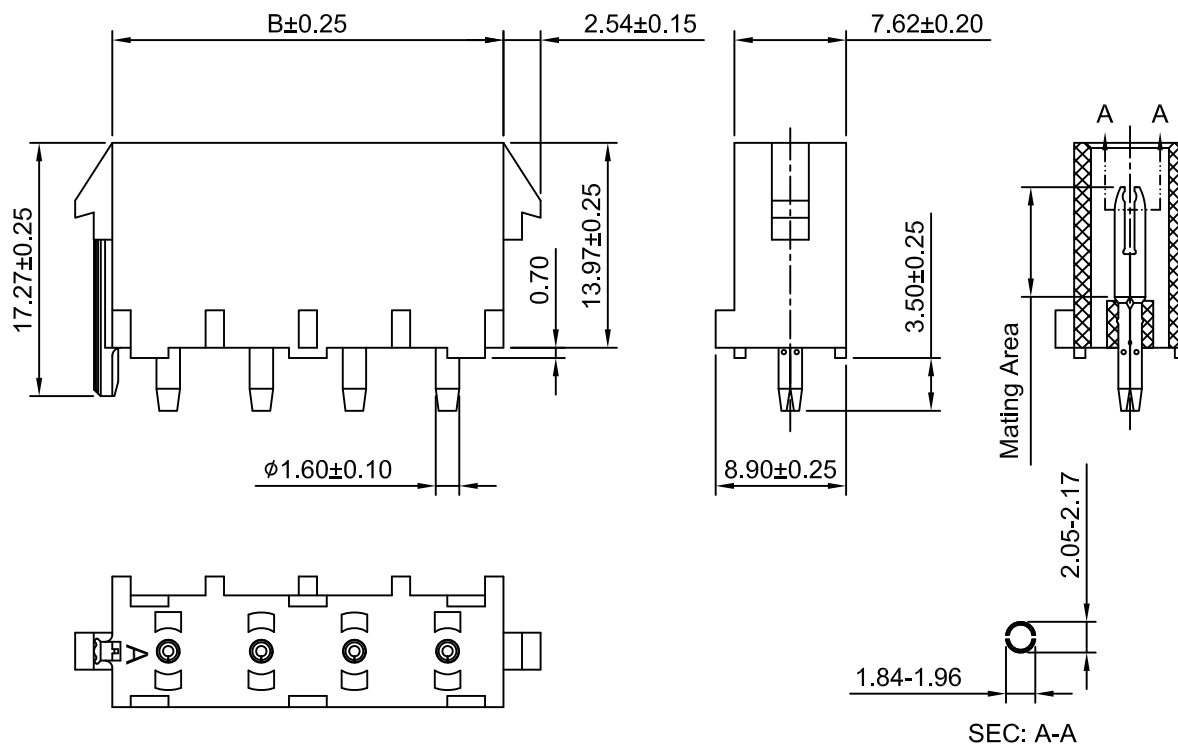


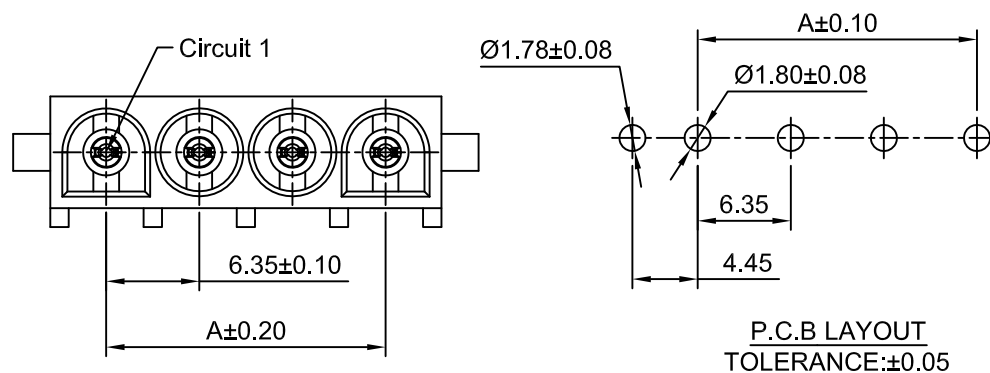

Ordering Information:
C6351WV-F-XP-M - ** - ***
1 2 3

- 1.Part NO.
2.Material:
(Blank): Nylon 66,UL94V-2(Natural)
V0: Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
3.Finish:
(Blank): Tin over Nickel
G: Gold-flash
G15: 15µin (0.38µm) MIN.Select Gold(Mating Area)
100µin (2.54µm) MIN.Select Tin
G30: 30µin (0.76µm) MIN.Select Gold(Mating Area)
100µin (2.54µm) MIN.Select Tin



SPECIFICATIONS:

Current Rating: 13.5A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	6.35	13.97	7P	38.10	45.72
3P	12.70	20.32	8P	44.45	52.07
4P	19.05	26.67	9P	50.80	58.42
5P	25.40	33.02	10P	57.15	64.77
6P	31.75	39.37			

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	6.35mm PITCH 180°SINGLE ROW WAFER, POLARIZING PEG-MALE TYPE		
DRWN	CHKD	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		REV A2
			C6351WV-F-XP-M		

A2	CHANGE THE DRAWING	2023.04.12
A1	CHANGE THE DRAWING	2021.03.17
A0	NEW RELEASE	2018.12.25
REV	DESCRIPTION	DATE