
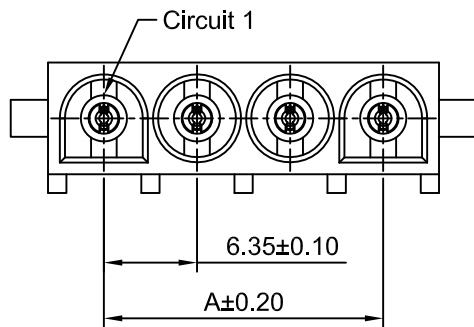
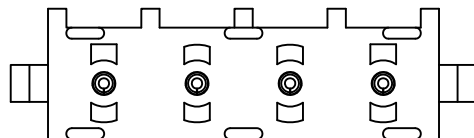

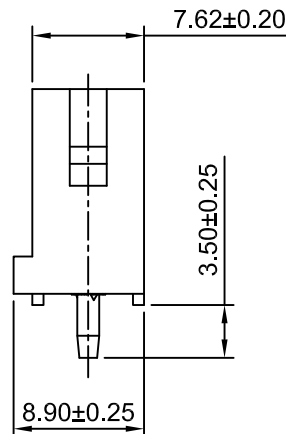


P.C.B LAYOUT
TOLERANCE:±0.05

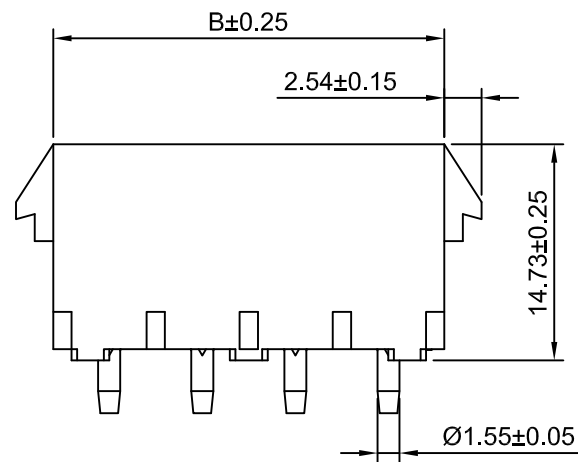

Ordering Information:

C6351WV-XP-M - ** - ***
1 2 3

1.Part No.

2.Material:

(Blank):UL94V-2(Natural)

V0:UL94V-0(White)

GWT:Nylon 66,UL94V-0(White),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish:

(Blank):Tin over Nickel

G:Gold-flash

G15:15µin (0.38µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin

G30:30µin (0.76µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material:Phosphor Bronze

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351WV-2P-M	6.35	13.97
C6351WV-3P-M	12.70	20.32
C6351WV-4P-M	19.05	26.67
C6351WV-5P-M	25.40	33.02
C6351WV-6P-M	31.75	39.37
C6351WV-7P-M	38.10	45.72
C6351WV-8P-M	44.45	52.07
C6351WV-9P-M	50.80	58.42
C6351WV-10P-M	57.15	64.77

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm Scale 2:1 Sheet 1 of 1

DRWN CHK'D APPR
Chengbiao Ye Diankui Wan Jack Yin

General Tolerances
x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°



TITLE
6.35mm PITCH
VERTICAL SINGLE ROW WAFER
-MALE TYPE

DRAWING NO. C6351WV-XP-M REV A3

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2023.02.22
A2	CHANGE THE DRAWING	2022.02.10
A1	CHANGE THE SIZE	2020.06.09
A0	NEW RELEASE	2009.05.10