
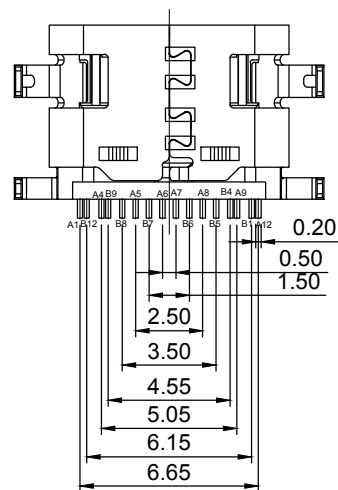
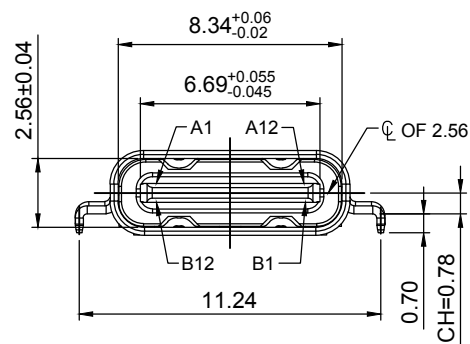
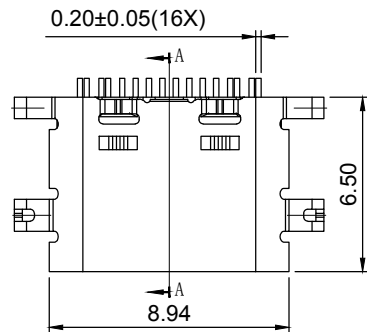


AFTER MATING

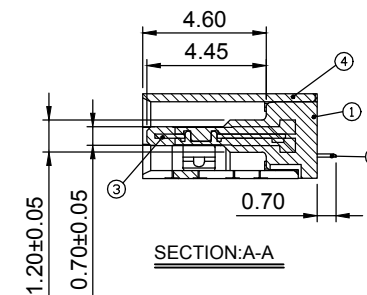


TYPE:

4	Shell	SUS304 T=0.30mm	Nickel 30u" Min Plating	1PCS
3	Shielding Plate	SUS301 T=0.15mm	---	1PCS
2	Contact	C18400-H T=0.12mm	Au 3u"Plated On Vontact Area GF Plated On Solder Area; Nickel 50u"Min Under Plating Over All.	2SET
1	Housing	LCP UL94V-0	Black	1PCS
No.	Description	Material	Remarks	QTY

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	1:1	1 of 3	USB TYPE C FEMALE 16PIN Mid-Mount 0.8 TYPE SHELL L6.50mm
DRAWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
DRAWING NO.			REV
CJ-CF061-16P			A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2023.05.16

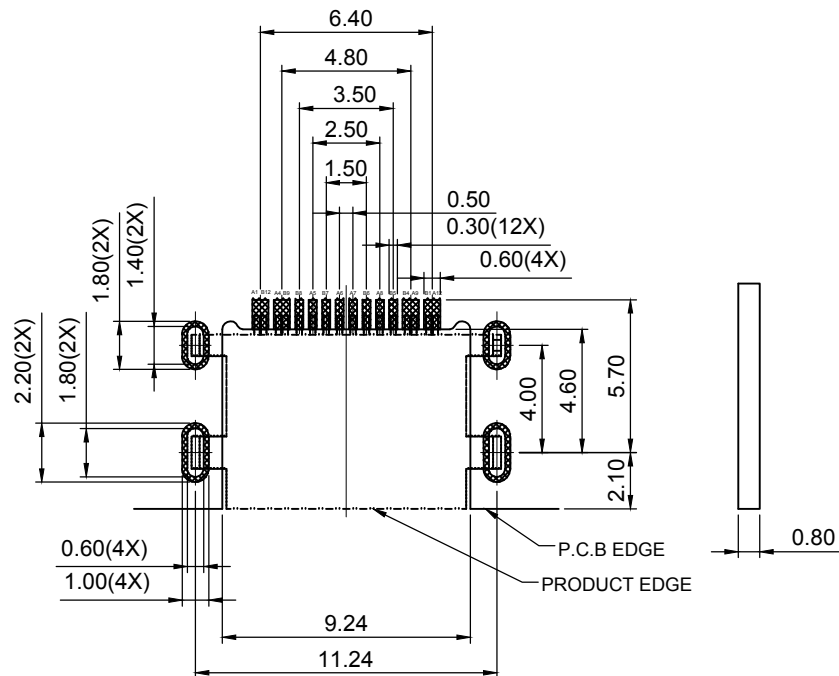

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

USB Type-C Pin Assignments

Pin Number	Signal Name	Pin Number	Signal Name
A1	GND	B12	GND
A2	---	B11	---
A3	---	B10	---
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	---	B3	---
A11	---	B2	---
A12	GND	B1	GND

SPECIFICATIONS:

- ELECTRICAL PERFORMANCE,
 - CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,
0.25 AMPS. FOR ALL OTHER CONTACT.
 - VOLTAGE RATING:20V DC/AC (RMS. MAX)
 - CONTACT RESISTANCE: 40MΩ MAX INITIAL.
50MΩ MAX AFTER TEST
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
 - INSULATION RESISTANCE:100MΩ MIN
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 5~20N.
 - EXTRACTION FORCE: 8~20N.
 - DURABILITY: 10000 CYCLES.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.
- COMPLIANCE WITH ROHS & HF REQUIREMENTS.
- SALT SPRAY:48H

Ordering Information:

CJ-CF061 - 16P - *** - ***
1 2 3

1.Part NO.

2.Finish:

(Blank): Select Gold:3μin[0.076μm]Min.
Select Reflowed Gold Flash: 0.6μin[0.015μm] Min
Overall Nickel Underplate: 30μin[0.76μm] Min.

G15: Select Gold:15μin[0.38μm]Min.

Select reflowed matte tin: 80μin[2.03μm] Min
Overall Nickel Underplate: 30μin[0.76μm] Min.


G30: Select Gold:30μin[0.76μm]Min.

Select reflowed matte tin: 80μin[2.03μm] Min Overall
Nickel Underplate: 30μin[0.76μm] Min.



3.Packing:

(Blank): Tape & Reel

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	2 of 3	USB TYPE C FEMALE 16PIN Mid-Mount 0.8 TYPE SHELL L6.50mm
DRAWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x,x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			
			CJ-CF061-16P
			REV A0

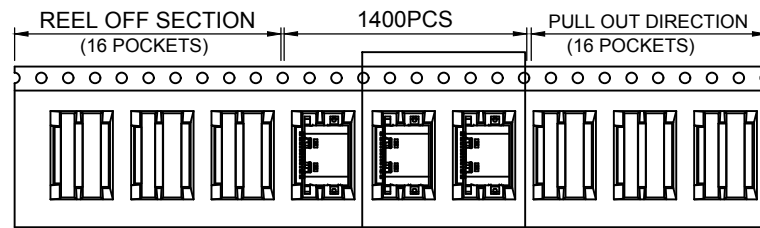

SEE DETAIL X

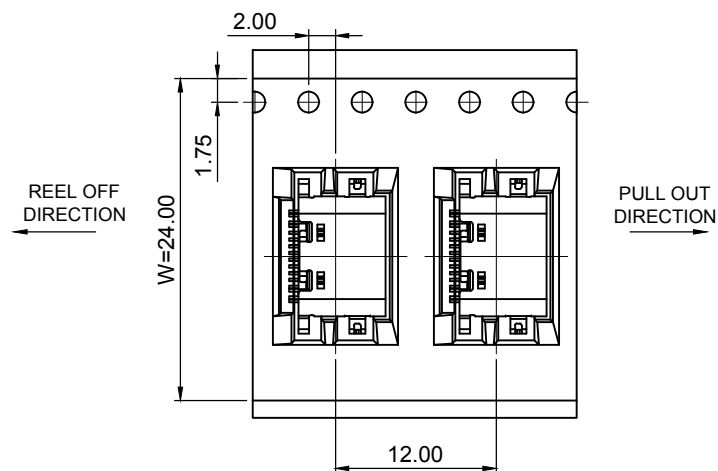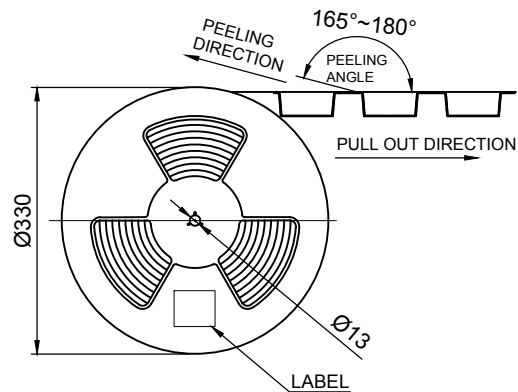

PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

FOLDER
PAPER BOARD

CARTON

	REEL	CARTON
CONNECTOR (PCS)	1400	14000

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE USB TYPE C FEMALE 16PIN Mid-Mount 0.8 TYPE SHELL L6.50mm
mm	1:1	3 of 3	
DRAWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			REV A0
CJ-CF061-16P			

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2023.05.16

CJ-CF061-16P