
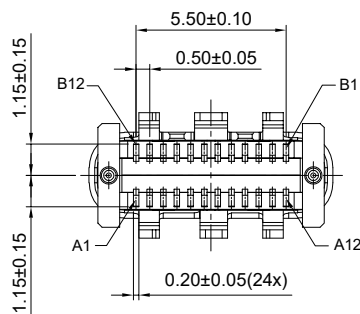
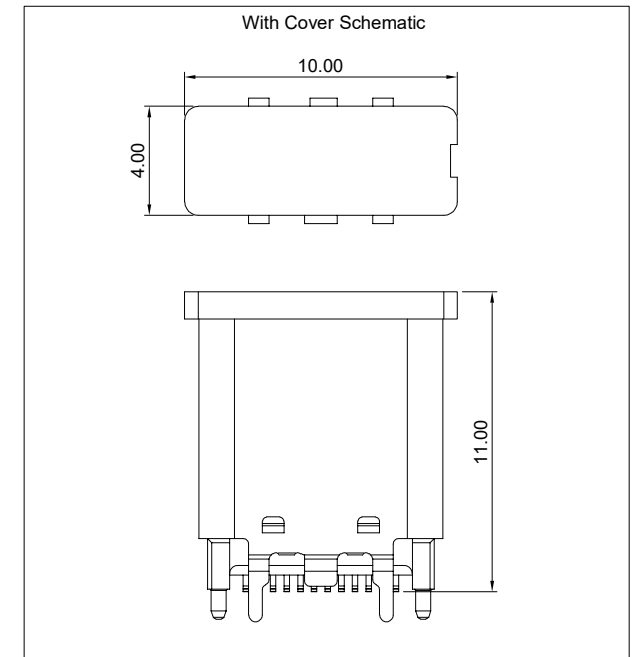
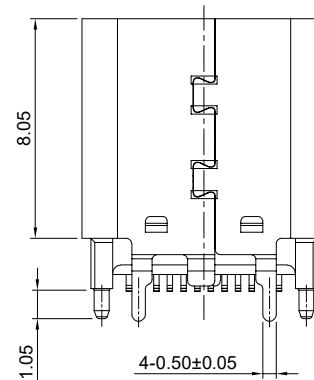
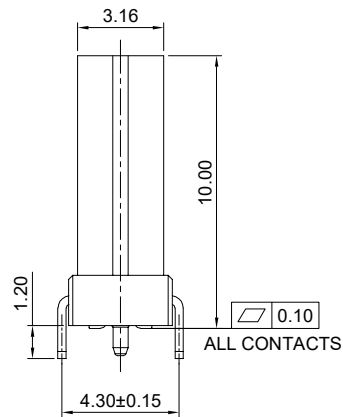
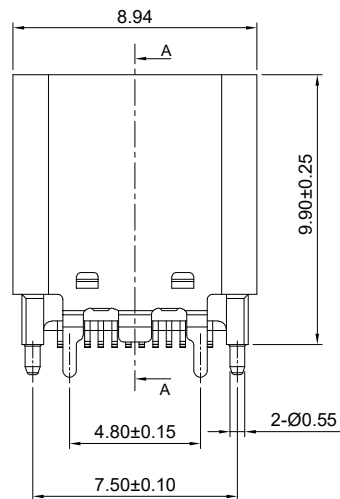

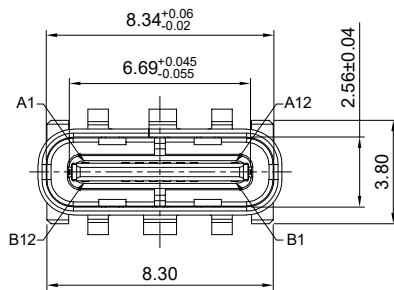


Section:A-A

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL 304, NI 30u" MIN PLATED
2	EMI Plate	1	STAINIESS STEEL 301,NI 30u" MIN PLATED
3	Mid Plate	1	STAINIESS STEEL 301, NO PLATED
4	CONTACT	24	COPPER STEEL C18400,Au3u" Plated On Contact Area Matte Tin Plated 60u"Min On Solder Area; Nickel 50u"Min Under Plating Over All.
5	HOUSING	1	LCP BLACK UL94 V-0
6	CAP	1	LCP BLACK UL94 V-0


CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 3	USB TYPE C FEMALE 24PIN VERTICAL TYPE SHELL H10.0mm	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.	REV A0
			CJ-CF242-24P	

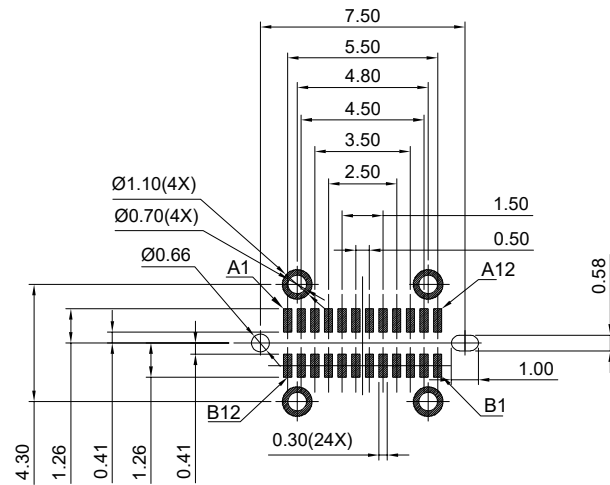

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.5±0.10MM;DEFAULT TOLERANCE:±0.05

USB Type-C Pin Assignments

Pin Number	Signal Name	Pin Number	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

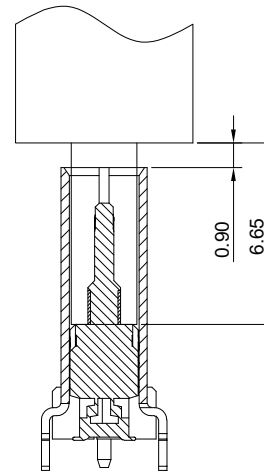

Mated Condition(Ref.)

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2020.08.03

SPECIFICATIONS:

- ELECTRICAL PERFORMANCE,
 - CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,
0.25 AMPS. FOR ALL OTHER CONTACT.
 - VOLTAGE RATING:20V DC/AC (RMS. MAX)
 - CONTACT RESISTANCE: 40mΩ MAX INITIAL.
50mΩ MAX AFTER TEST
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
 - INSULATION RESISTANCE:100MΩ MIN
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 5~20N.
 - EXTRACTION FORCE: 8~20N.
 - DURABILITY: 10000 CYCLES.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.
- COMPLIANCE WITH ROHS & HF REQUIREMENTS.

Ordering Information:

CJ-CF242 - 24P - *** - ***
1 2 3

1.Part NO.

2.Finish:

(Blank): Select Gold:3μin[0.075μm]Min.

Select Reflowed Tin: 60μin[1.5μm] Min

Overall Nickel Underplate: 50μin[1.25μm] Min.

G15:Select Gold:15μin[0.38μm]Min.

Select Reflowed Tin: 60μin[1.5μm] Min

Overall Nickel Underplate: 50μin[1.25μm] Min.

G30: Select Gold:30μin[0.76μm]Min.





Select Reflowed Tin: 60μin[1.5μm] Min

Overall Nickel Underplate: 50μin[1.25μm] Min.

3.Packing:

(Blank): Tape & Reel Cap

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	1:1	2 of 3	USB TYPE C FEMALE 24PIN VERTICAL TYPE SHELL H10.0mm		
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			CJ-CF242-24P		A0

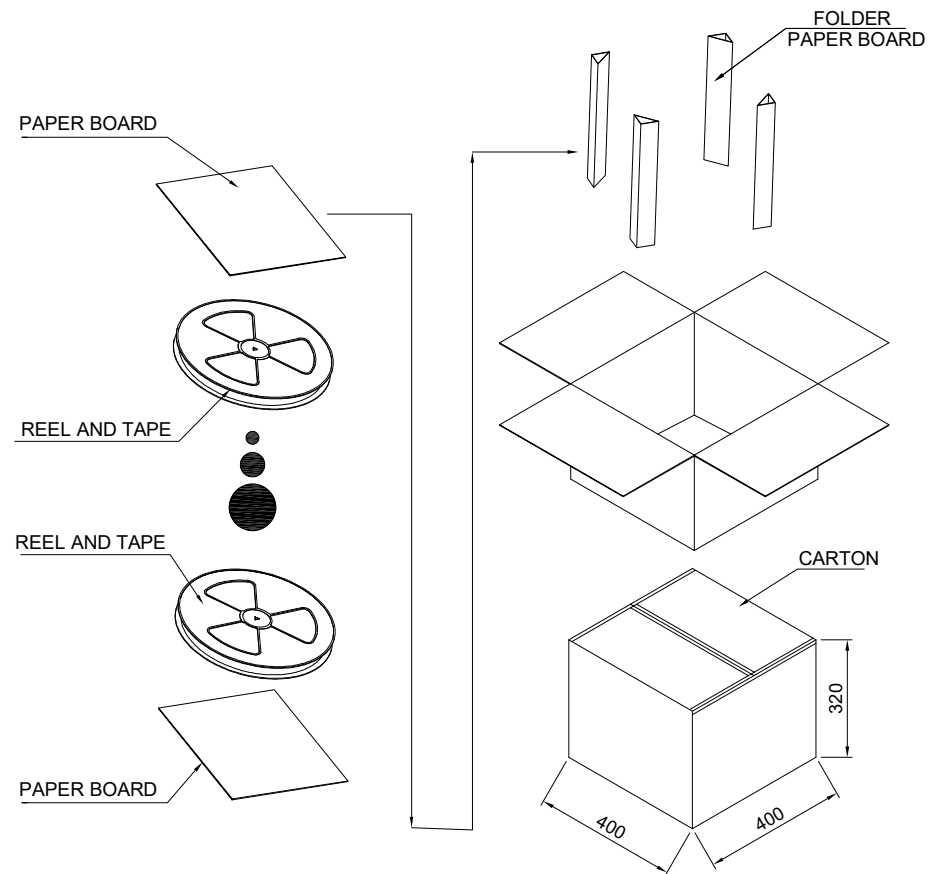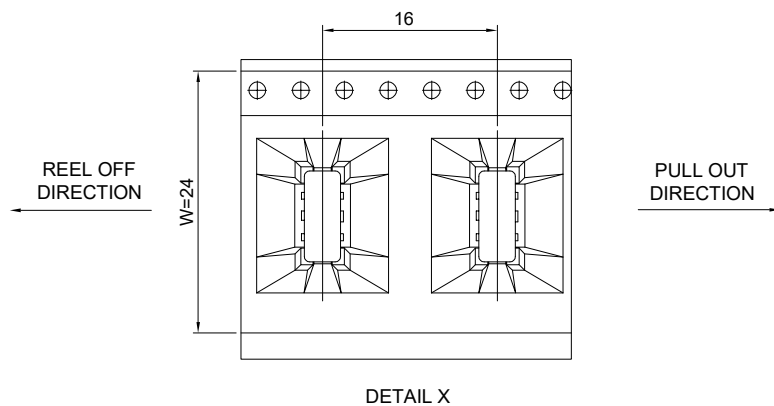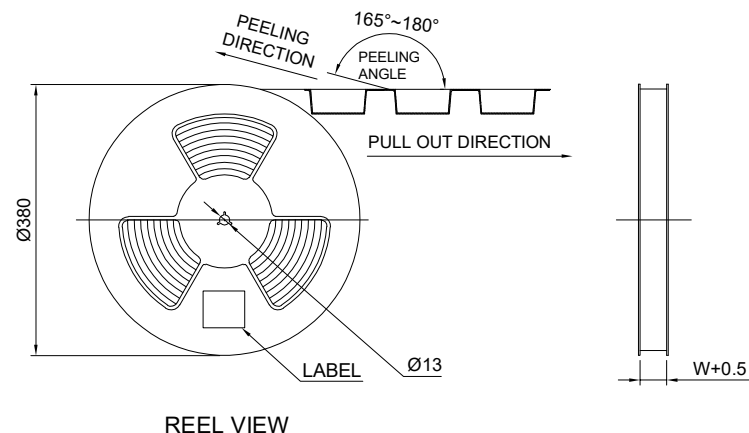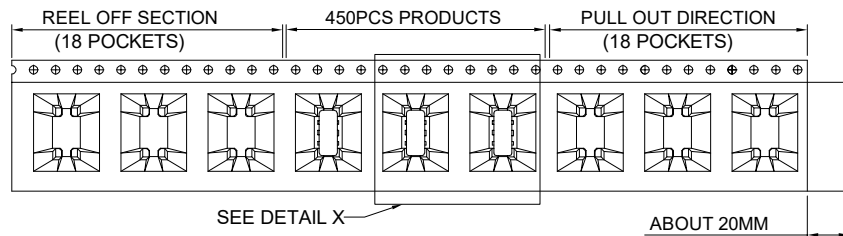

	REEL	CARTON
CONNECTOR (PCS)	450	4500

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	3 of 3	USB TYPE C FEMALE 24PIN VERTICAL TYPE SHELL H10.0mm
DRAWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			CJ-CF242-24P
REV	DESCRIPTION		REV A0

A0	NEW RELEASE	2020.08.03
REV	DESCRIPTION	DATE