



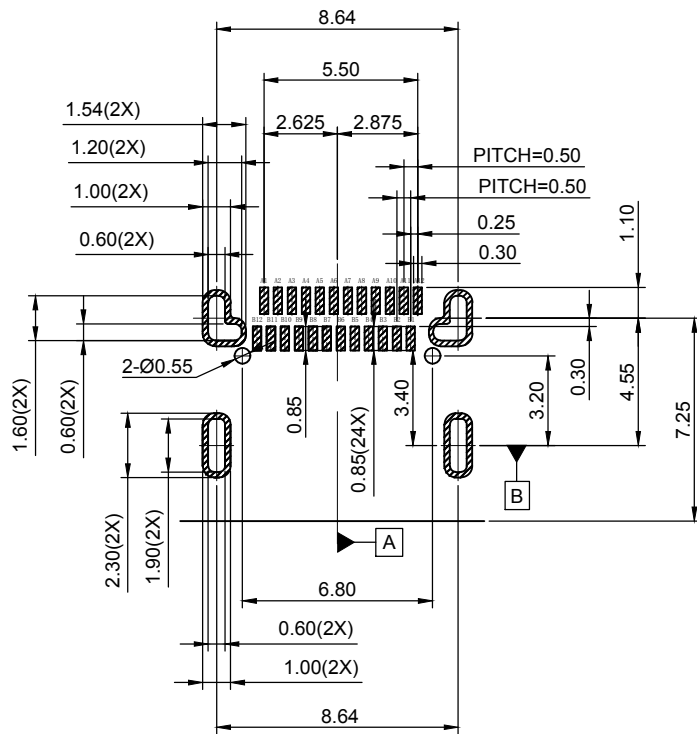

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

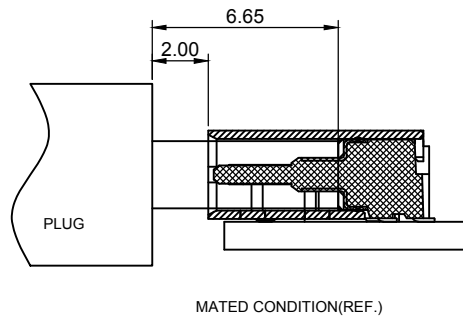

A0	NEW RELEASE	2020.11.25
REV	DESCRIPTION	DATE

Specifications:

- Electrical Performance,
 - Current Rating: 5 Amps. For Total VBUS/GND Pins;
1.25Amps For CC pin,
0.25 Amps. For All Other Contact.
 - Voltage Rating: 20V DC/AC (Rms. Max)
 - LCR:
 - VBUS & GND Pins And Other Pins: 40mΩ/ Pin Max.
 - Shield: 50mΩ/Max.
 - LCR max. Change of All Pins: 10mΩ.
 - Insulation Resistance: 100mΩ Min
 - Dielectric Withstand Voltage, AC 100v For 1 Minute.
- Mechanical Performance,
 - Insertion Force: 5~20n.
 - Extraction Force: 8~20n.
 - Durability: 10000 Cycles.
- Environmental Performance:
 - Operating Temperature: -25°C~+85°C.
- IR Reflow:
 - The Peak Temperature On The Board Shall Be Maintained For 10 Seconds At 260°C.
- Compliance With Rohs Requirements.
- Salt Spray: 48H

Ordering Information:

CJ-USF04 - 24P - *** - ***
1 2 3

1. Part NO.

2. Finish:

(Blank): Select Gold: 3μm[0.076μm] Min.

Select Reflowed Gold Flash: 0.6μm[0.015μm] Min

Overall Nickel Underplate: 30μm[0.76μm] Min.

G15: Select Gold: 15μm[0.38μm] Min.

Select reflowed matte tin: 80μm[2.03μm] Min

Overall Nickel Underplate: 30μm[0.76μm] Min.

G30: Select Gold: 30μm[0.76μm] Min.


Select reflowed matte tin: 80μm[2.03μm] Min Overall

Nickel Underplate: 30μm[0.76μm] Min.




3. Packing:

(Blank): Tape & Reel

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	2 of 3	USB TYPE-C FEMALE 24PIN TOP-MOUNT DUAL ROW SMT, CH=1.68mm
DRAWN	CHKD	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			CJ-USF04-24P
REV	DESCRIPTION	DATE	
A0	NEW RELEASE	2020.11.25	REV A0

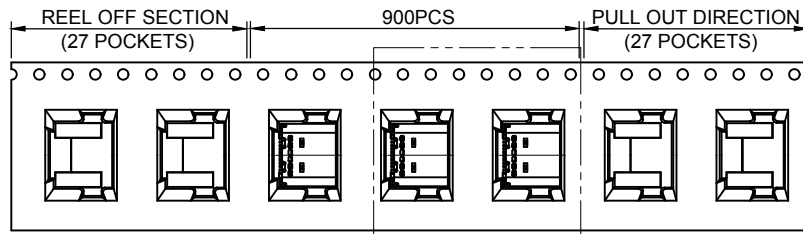

SEE DETAIL X

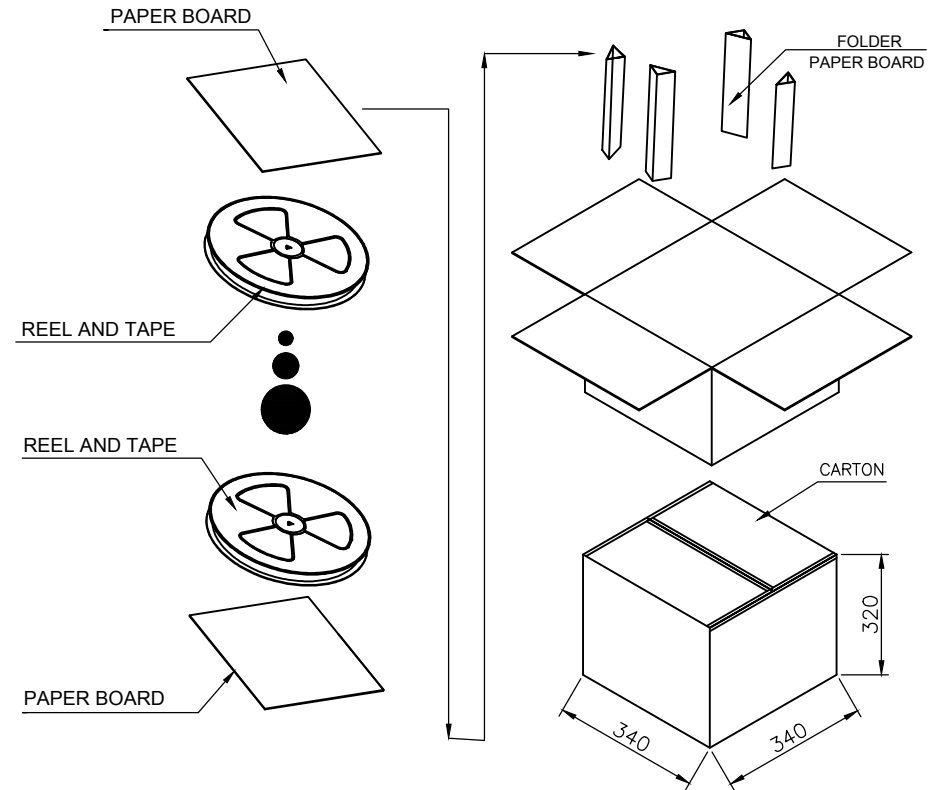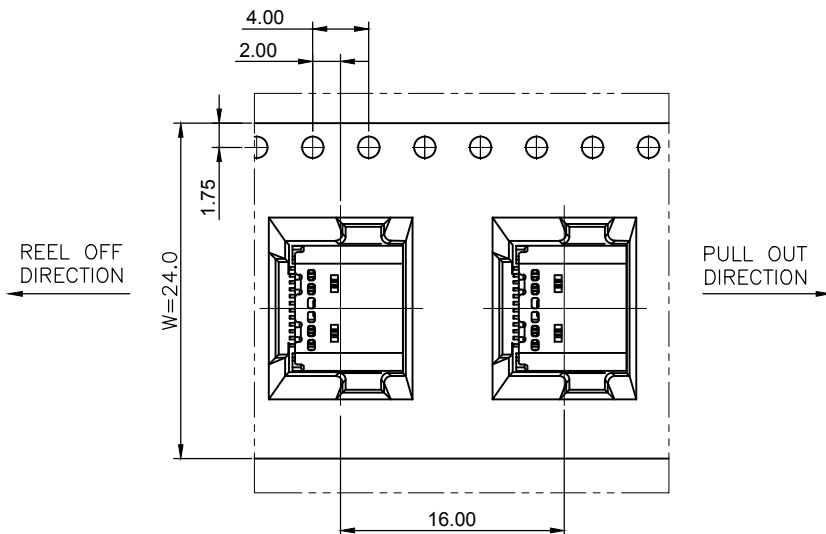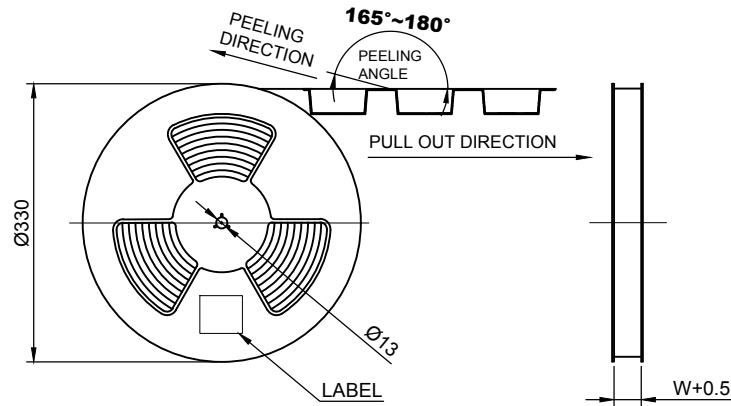

	REEL	CARTON
CONNECTOR (PCS)	900	9000

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	3 of 3	
DRAWN	CHKD	APPR	USB TYPE-C FEMALE 24PIN TOP-MOUNT DUAL ROW SMT, CH=1.68mm
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			
REV	DESCRIPTION	DATE	CJ-USF04-24P
A0	NEW RELEASE	2020.11.25	REV A0