
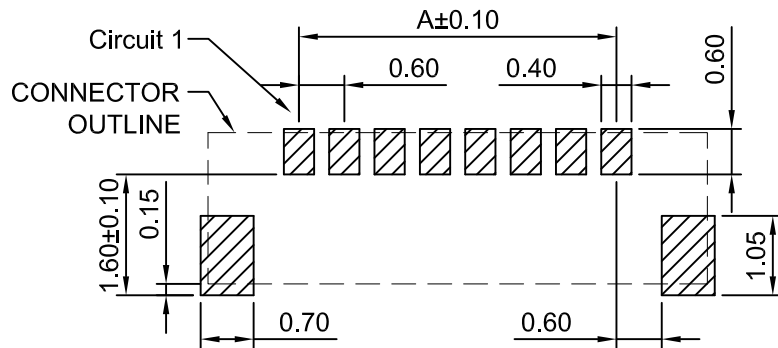
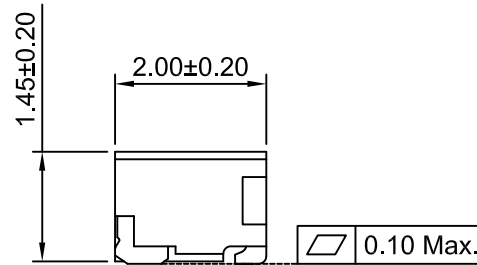
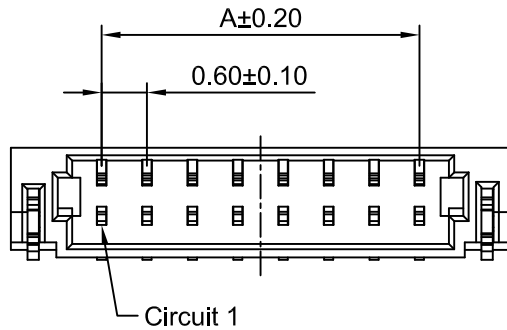



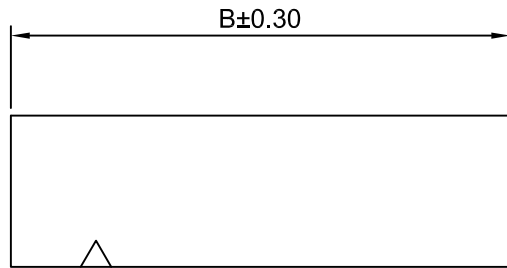

P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

SPECIFICATIONS:

Current Rating: 0.2A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 200V AC/minute
Pin Material: Brass/Gold over Nickel
Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
D0601WR-S-2P	0.60	3.00
D0601WR-S-3P	1.20	3.60
D0601WR-S-4P	1.80	4.20
D0601WR-S-5P	2.40	4.80
D0601WR-S-6P	3.00	5.40
D0601WR-S-7P	3.60	6.00
D0601WR-S-8P	4.20	6.60
D0601WR-S-9P	4.80	7.20
D0601WR-S-10P	5.40	7.80
D0601WR-S-11P	6.00	8.40
D0601WR-S-12P	6.60	9.00
D0601WR-S-13P	7.20	9.60
D0601WR-S-14P	7.80	10.20
D0601WR-S-15P	8.40	10.80
D0601WR-S-16P	9.00	11.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	10:1	1 of 1	
DRWN	CHK'D	APPR	0.60mm PITCH RIGHT-ANGLE HEADER -SMD TYPE
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			
A2	CHANGE THE DRAWING	2021.11.04	D0601WR-S-XP
A1	MODIFY DRAWING	2020.05.13	
A0	NEW RELEASE	2005.07.01	REV
REV	DESCRIPTION	DATE	