
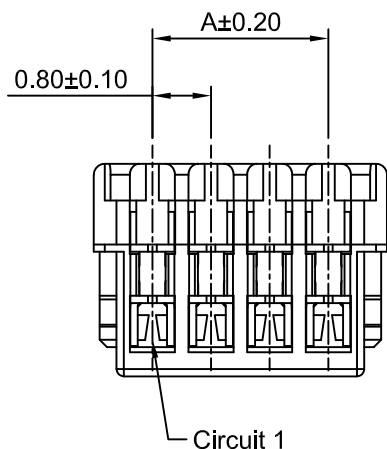
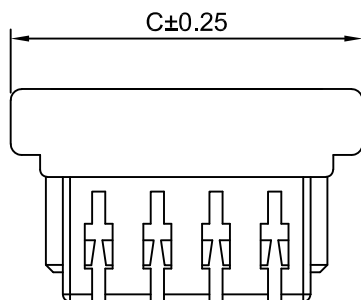



Type 1

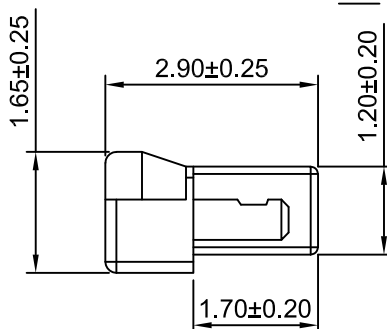


Type 2

Ordering Information:
D0801H-XP - *** - *** - *** - ***
1 2 3 4 5


- Part No.
- Style:
(Blank): Type 1
2: Type 2
- Material:
(Blank): Nylon 66,UL94V-0
GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.
- Color & Wire range:
(Blank): Natural,32AWG
YL: Yellow,36AWG
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
G15: Gold over Nickel (Au:15u")



E VIEW

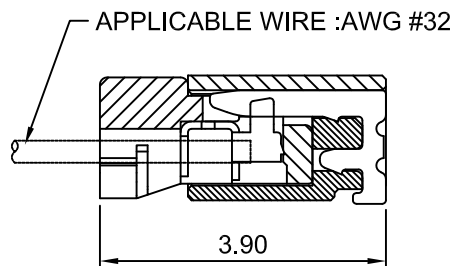

MATED CONDITION



SPECIFICATIONS:

Current rating: 0.5A AC,DC (AWG #32,OD:0.39mm Max)
0.2A AC,DC (AWG #36,OD:0.39mm Max)
Voltage rating: 30V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 20mΩ Max.
Insulation resistance: 100MΩ Min.
Withstanding voltage: 200V AC/minute
Terminal Material: Phosphor Bronze/Tin over Nickel
Housing Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	0.80	2.40	3.20	13P	9.60	11.20	12.00
3P	1.60	3.20	4.00	14P	10.40	12.00	12.80
4P	2.40	4.00	4.80	15P	11.20	12.80	13.60
5P	3.20	4.80	5.60	16P	12.00	13.60	14.40
6P	4.00	5.60	6.40	17P	12.80	14.40	15.20
7P	4.80	6.40	7.20	18P	13.60	15.20	16.00
8P	5.60	7.20	8.00	19P	14.40	16.00	16.80
9P	6.40	8.00	8.80	20P	15.20	16.80	17.60
10P	7.20	8.80	9.60	21P	16.00	17.60	18.40
11P	8.00	9.60	10.40	22P	16.80	18.40	19.20
12P	8.80	10.40	11.20				

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	10:1	1 of 1	0.80mm pitch Insulation Displacement Connector		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		REV
			D0801H-XP		A1