

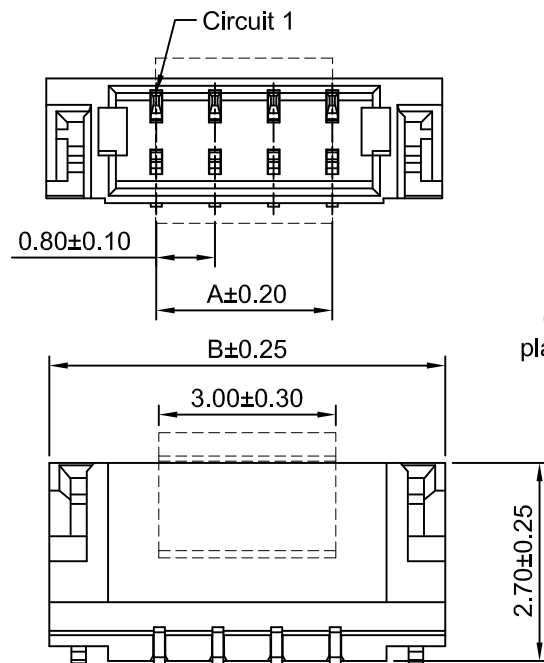


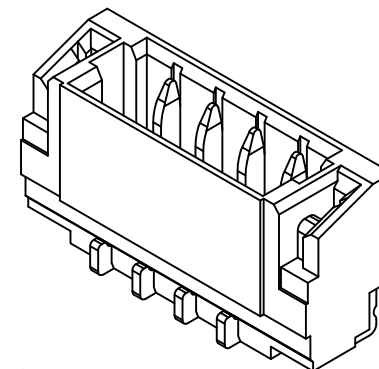

Ordering Information:
D0801WV-S-XP-LCP - ***
1 2

1.Part No.
2.Finish:
(blank) - Tin over Nickel
G - Gold over Nickel

Cap
(For pick and
place systems)

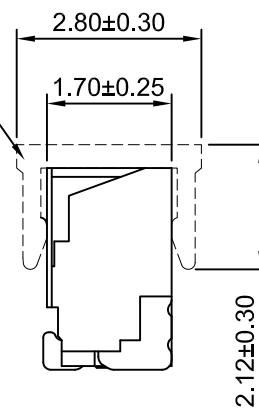


SPECIFICATIONS:

Current rating: 1A AC,DC
Voltage rating: 30V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 20mΩ Max.
Insulation resistance: 100MΩ Min.
Withstanding voltage: 200V AC/minute
Terminal Material: Phosphor Bronze/Tin over Nickel
Housing Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	0.80	3.78	10P	7.20	10.18
3P	1.60	4.58	11P	8.00	10.98
4P	2.40	5.38	12P	8.80	11.78
5P	3.20	6.18	13P	9.60	12.58
6P	4.00	6.98	14P	10.40	13.38
7P	4.80	7.78	15P	11.20	14.18
8P	5.60	8.58	16P	12.00	14.98
9P	6.40	9.38			

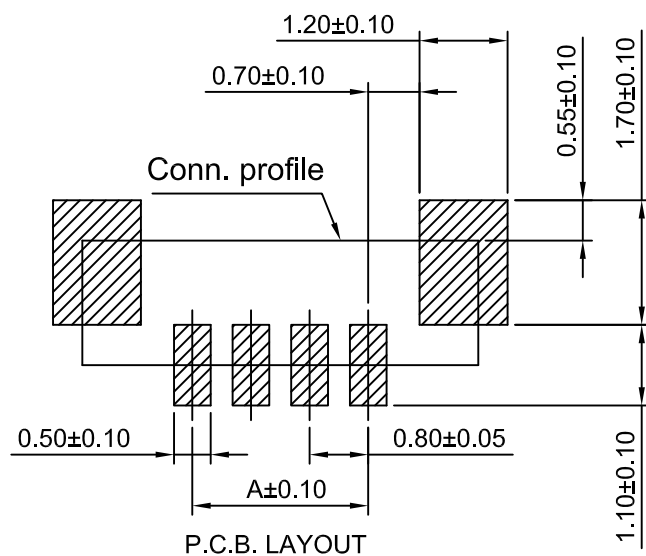

P.C.B. LAYOUT

A2	CHANGE THE DRAWING	2021.12.16
A1	CHANGE THE DRAW NO.	2019.06.03
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 0.80mm Pitch 180° Wafer -SMT Type
mm	8:1	1 of 2	
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			DRAWING NO.
D0801WV-S-XP-LCP			REV A2