
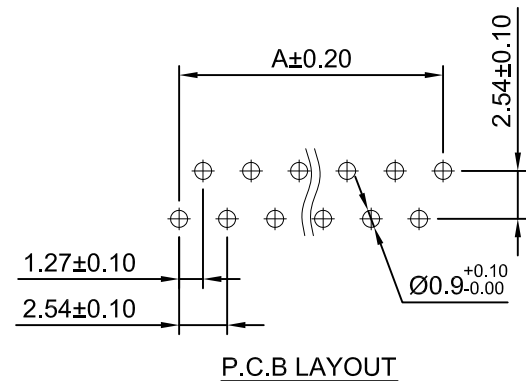



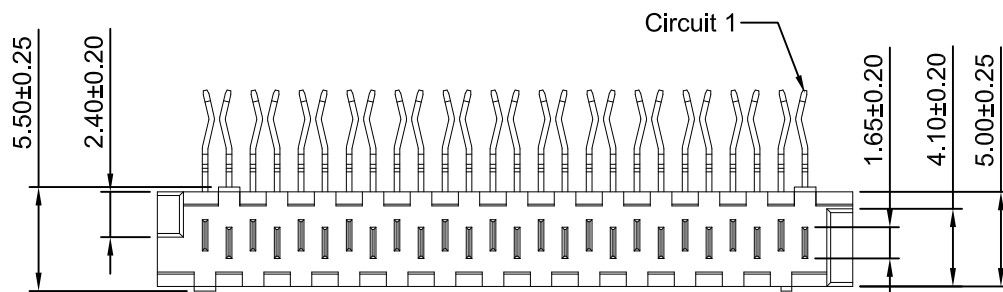


SPECIFICATIONS:

Current Rating: 1.2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze
 Material: LCP+30%G.F UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
D1272WR-4P	3.81	8.86	6.11
D1272WR-6P	6.35	11.40	8.65
D1272WR-8P	8.89	13.94	11.19
D1272WR-10P	11.43	16.46	13.73
D1272WR-12P	13.97	19.02	16.27
D1272WR-14P	16.51	21.56	18.81
D1272WR-16P	19.05	24.10	21.35
D1272WR-18P	21.59	26.64	23.89
D1272WR-20P	24.13	29.18	26.43
D1272WR-22P	26.67	31.72	28.97
D1272WR-24P	29.21	34.26	31.51
D1272WR-26P	31.75	36.80	34.05

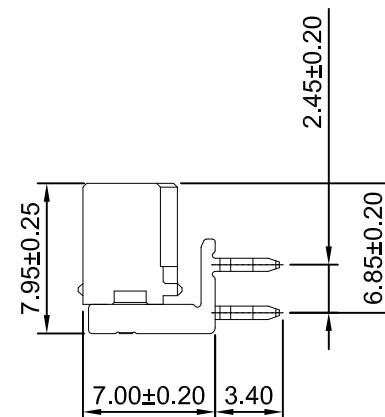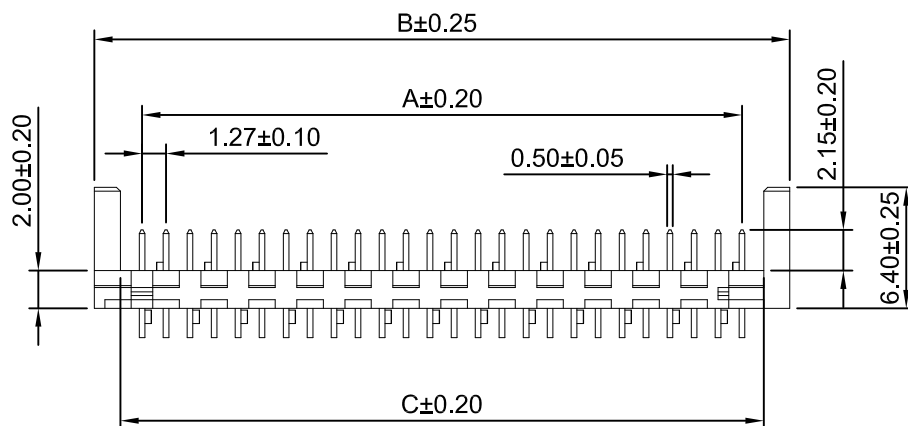

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 1		
DRAWN	CHK'D	APPR	1.27mm IDC 90° Wafer	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			D1272WR-XP	

A0	NEW RELEASE	2019.12.04
REV	DESCRIPTION	DATE