
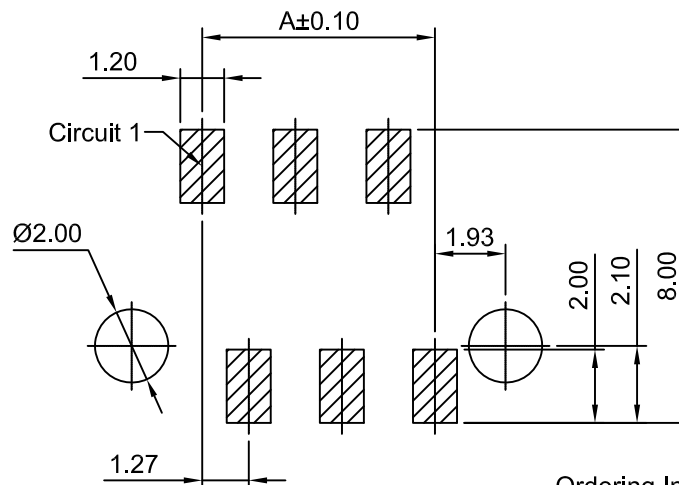


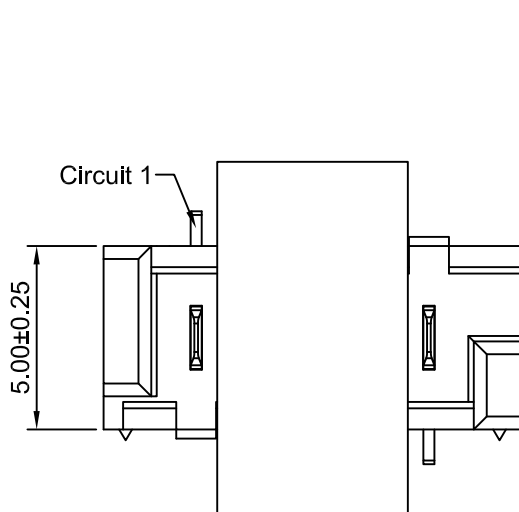

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:


D1272WV-S-F-XP-2 - **
1 2

1.Part NO.

2.Color:

(Blank): Black

IV: Ivory

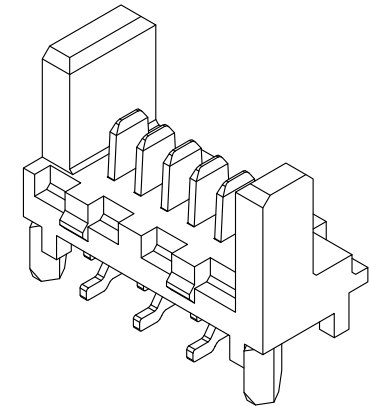

SPECIFICATIONS:

Current Rating: 1.2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage:500V AC/minute

Terminal Material: Copper Alloy/Tin over Nickel

Housing Material: LCP,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
D1272WV-S-F-4P-2	3.81	8.86
D1272WV-S-F-6P-2	6.35	11.40
D1272WV-S-F-8P-2	8.89	13.94
D1272WV-S-F-10P-2	11.43	16.48
D1272WV-S-F-12P-2	13.97	19.02
D1272WV-S-F-14P-2	16.51	21.56
D1272WV-S-F-16P-2	19.05	24.10
D1272WV-S-F-18P-2	21.59	26.64
D1272WV-S-F-20P-2	24.13	29.18
D1272WV-S-F-22P-2	26.67	31.72
D1272WV-S-F-24P-2	29.21	34.26
D1272WV-S-F-26P-2	31.75	36.80

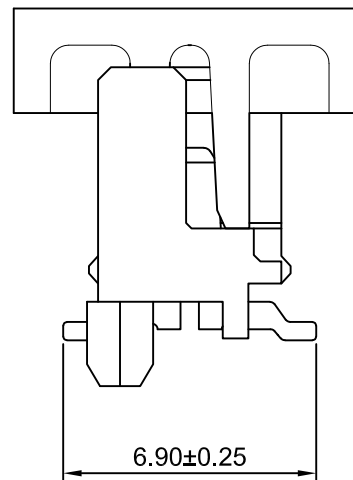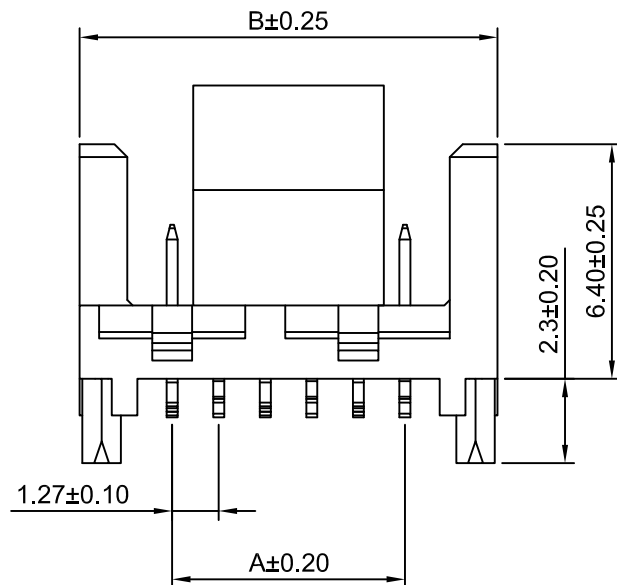

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 1	1.27mm IDC VERTICAL WAFER - SMD TYPE	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
A1	CHANGE THE DRAWING	2020.07.16	D1272WV-S-F-XP-2	A1
A0	NEW RELEASE	2017.01.10		
REV	DESCRIPTION	DATE		

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

