

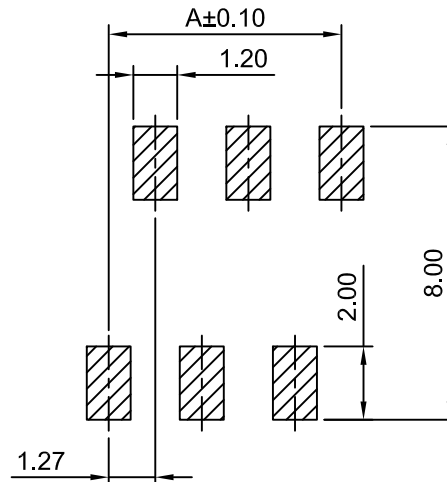


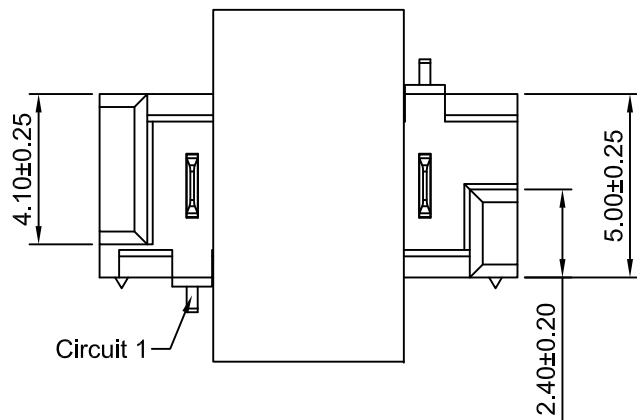

P.C.B LAYOUT
TOLERANCE:±0.05

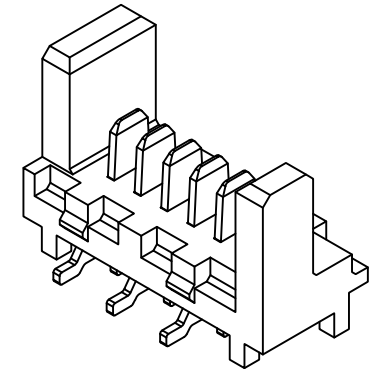

SPECIFICATIONS:

Current Rating: 1.2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage:500V AC/minute
Terminal Material: Copper Alloy/Tin over Nickel
Housing Material: LCP,UL94V-0

Ordering Information:

D1272WV-S-XP - ^{**}/₂ - ^{**}/₃

1.Part NO.

2.Size (H):

(blank): 6.40mm

L: 4.10mm



3.Color:

(Blank): Black

IV:Ivory

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
D1272WV-S-4P	3.81	8.86
D1272WV-S-6P	6.35	11.40
D1272WV-S-8P	8.89	13.94
D1272WV-S-10P	11.43	16.48
D1272WV-S-12P	13.97	19.02
D1272WV-S-14P	16.51	21.56
D1272WV-S-16P	19.05	24.10
D1272WV-S-18P	21.59	26.64
D1272WV-S-20P	24.13	29.18
D1272WV-S-22P	26.67	31.72
D1272WV-S-24P	29.21	34.26
D1272WV-S-26P	31.75	36.80

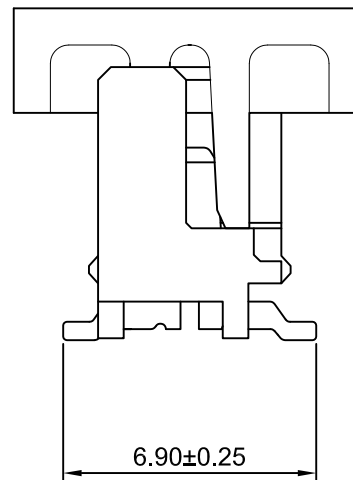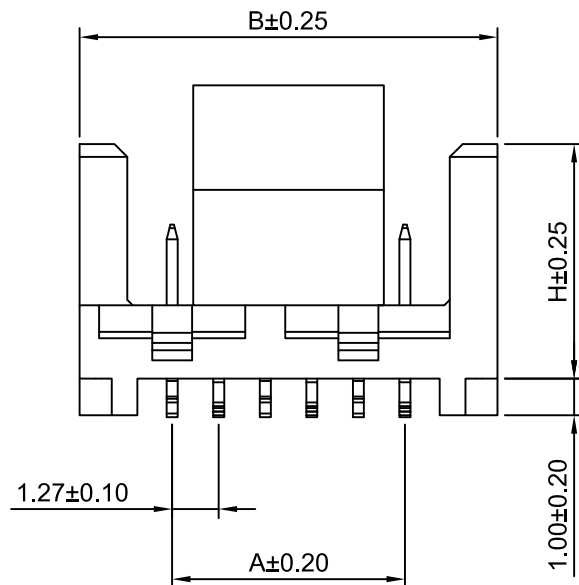

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHKD	APPR	1.27mm IDC 180° WAFFER - SMD TYPE	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
A1	CHANGE THE DRAWING	2023.06.05		
A0	NEW RELEASE	2017.01.10	DRAWING NO. D1272WV-S-XP	
REV	DESCRIPTION	DATE		
			REV A1	