
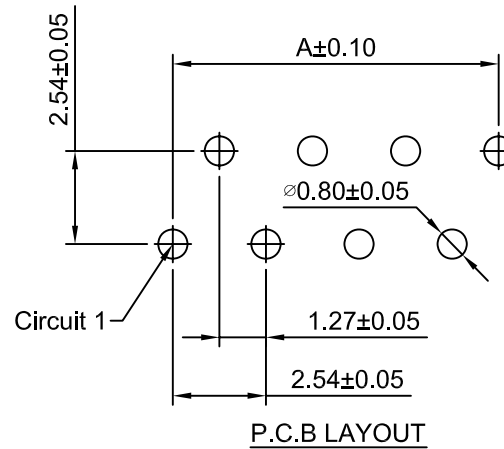
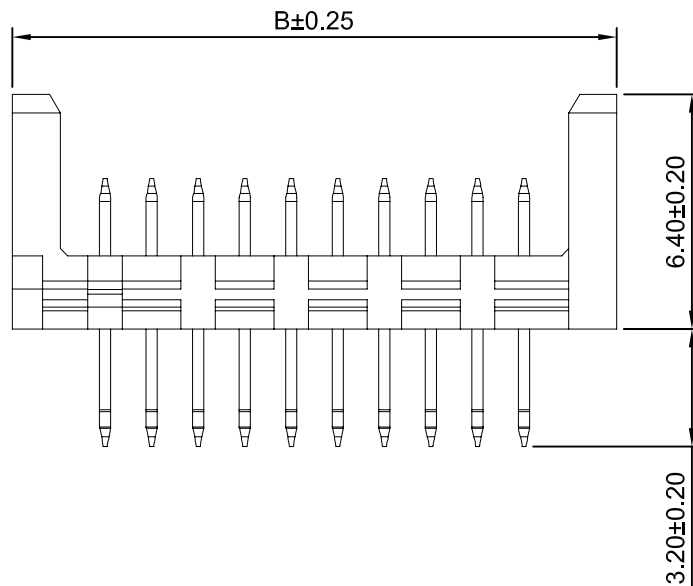
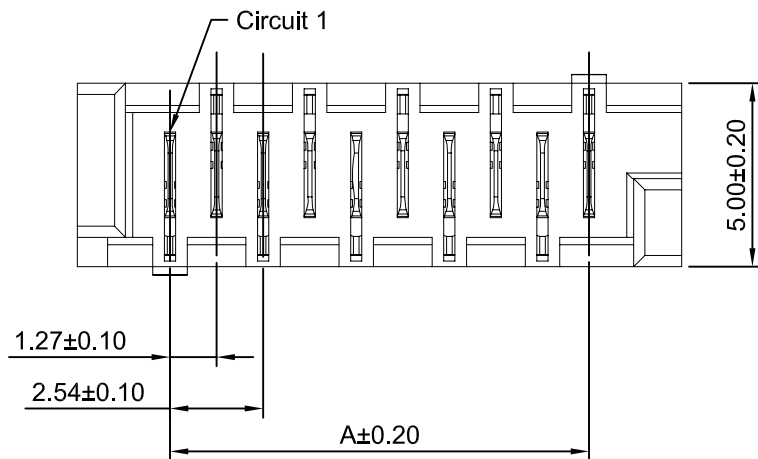


#### SPECIFICATIONS:

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1500V AC/minute  
Housing Material: Nylon 66,UL94V-0(Black)  
Terminal Material: Phosphor Bronze/Tin over Nickel

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 4P       | 3.81           | 8.86  | 16P      | 19.05          | 24.10 |
| 6P       | 6.35           | 11.40 | 18P      | 21.59          | 26.64 |
| 8P       | 8.89           | 13.94 | 20P      | 24.13          | 29.18 |
| 10P      | 11.43          | 16.48 | 22P      | 26.67          | 31.72 |
| 12P      | 13.97          | 19.02 | 24P      | 29.21          | 34.26 |
| 14P      | 16.51          | 21.56 | 26P      | 31.75          | 36.80 |

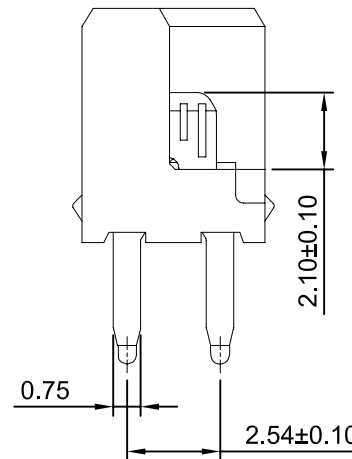

**CJT**conn

CHANGJIANG CONNECTORS CO.,LTD.

| Unit     | Scale | Sheet      |
|----------|-------|------------|
| mm       | 5:1   | 1 of 1     |
| Draw BY: |       | Approved : |
| Tony Su  |       | Jack Yin   |

Title :

1.27mm IDC

180° WAFER

DRAW NO : D1272WV-XP

REV  
A0

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2015.03.06 |

| General Tolerance |        |
|-------------------|--------|
| x.xx±0.25         | ANGLE± |
| x.xx±0.20         |        |
| x.xxx±0.15        |        |