

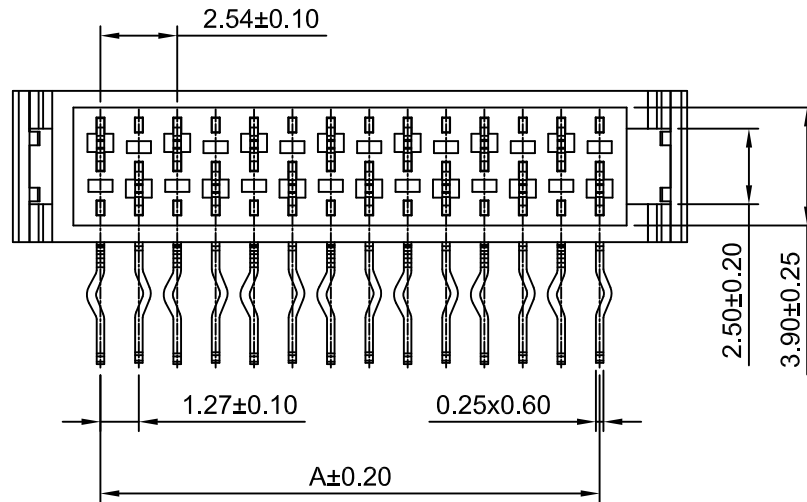
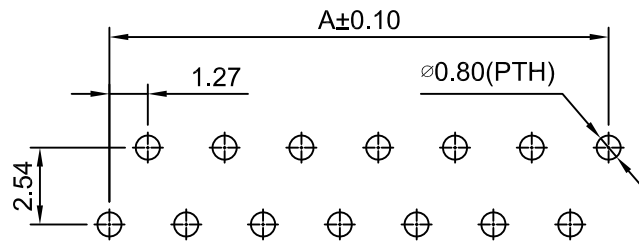
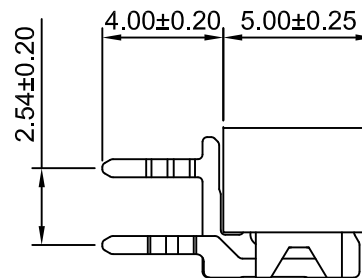


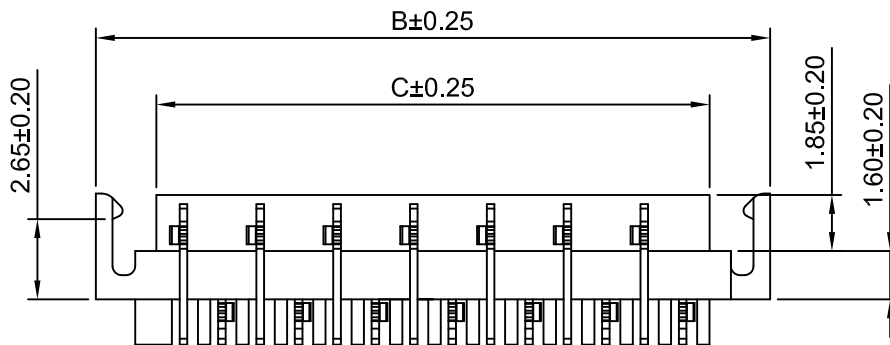

D1275HMMV-XP-6T

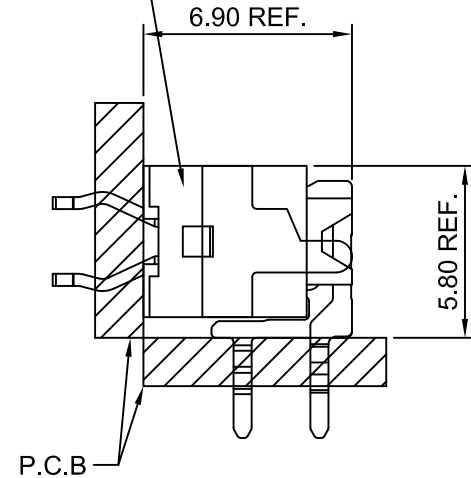

Ordering Information:
D1275HWRB-XP - 6T - ***
1 2 3

- Part NO.
- Material:
(Blank): Nylon 9T,UL94V-0
6T: Nylon 6T,UL94V-0
- Pin Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 1.0A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Phosphor Bronze
Housing Material: Nylon 6T,UL94V-0(Red)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
D1275HWRB-4P	3.81	9.70	5.60
D1275HWRB-6P	6.35	12.24	8.14
D1275HWRB-8P	8.89	14.78	10.68
D1275HWRB-10P	11.43	17.32	13.22
D1275HWRB-12P	13.97	19.86	15.76
D1275HWRB-14P	16.51	22.40	18.30
D1275HWRB-16P	19.05	24.94	20.84
D1275HWRB-18P	21.59	27.48	23.38
D1275HWRB-20P	24.13	30.02	25.92
D1275HWRB-22P	26.67	32.56	28.46
D1275HWRB-24P	29.21	35.10	31.00
D1275HWRB-26P	31.75	37.64	33.54

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.27mm PITCH 90° DIP WAFER	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO.	REV
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			D1275HWRB-XP-6T	A1

REV
A1