

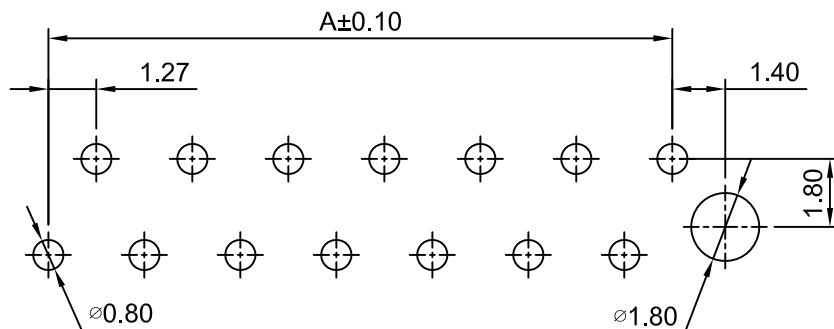
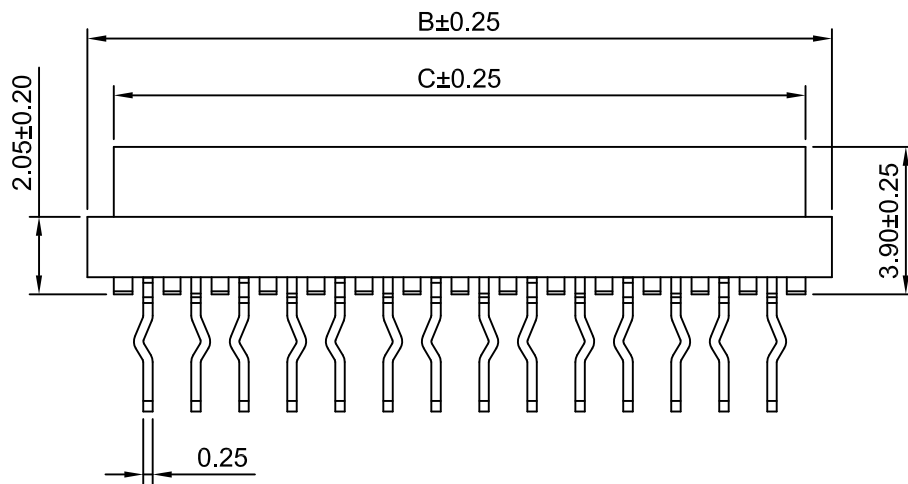
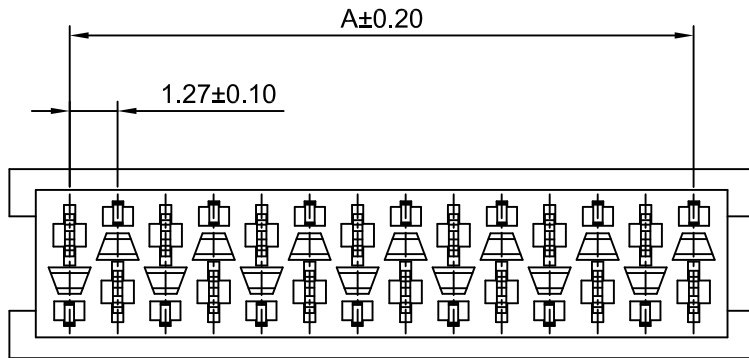


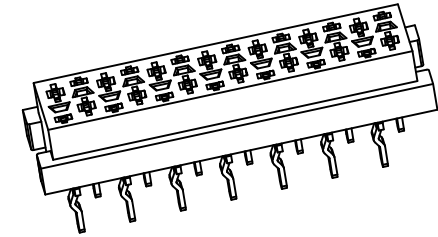

P.C.B LAYOUT
TOLERANCE:±0.05

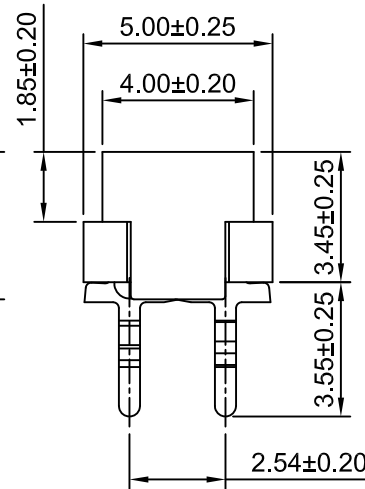

SPECIFICATIONS:

Current Rating: 1.0A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage:1000V AC/minute
Housing Material: Nylon 6T,UL94V-0(Red)
Terminal Material: Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
4P	3.81	7.00	5.60	16P	19.05	22.24	20.84
6P	6.35	9.54	8.14	18P	21.59	24.78	23.38
8P	8.89	12.08	10.68	20P	24.13	27.32	25.92
10P	11.43	14.62	13.22	22P	26.67	29.86	28.46
12P	13.97	17.16	15.76	24P	29.21	32.40	31.00
14P	16.51	19.70	18.30	26P	31.75	34.94	33.54

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 1.27mm Pitch 180° Wafer	
mm		5:1		1 of 1			
Draw By:		Approved :					
Diankui Wan		Jack Yin					
General Tolerance							
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT					
0				DRAW NO : D1275HWV-XP-6T		REV A0	