

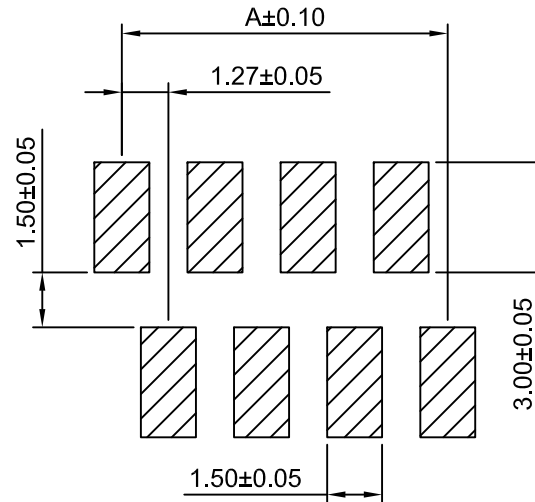
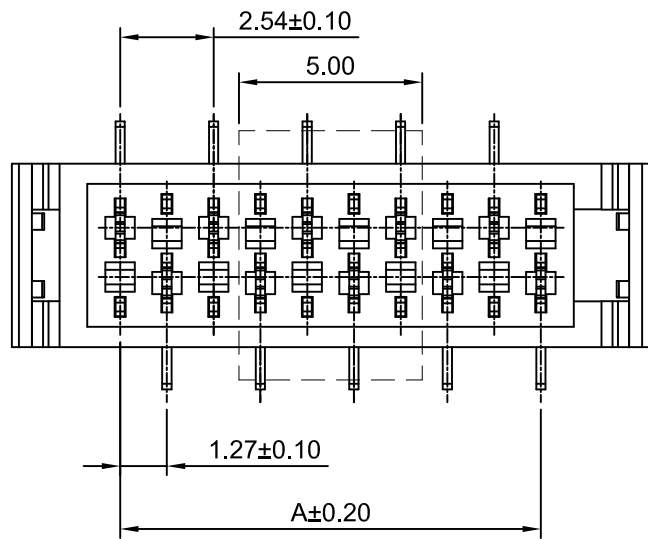
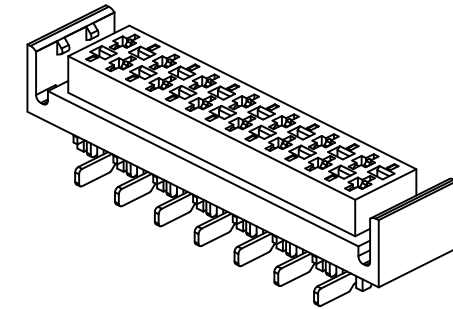


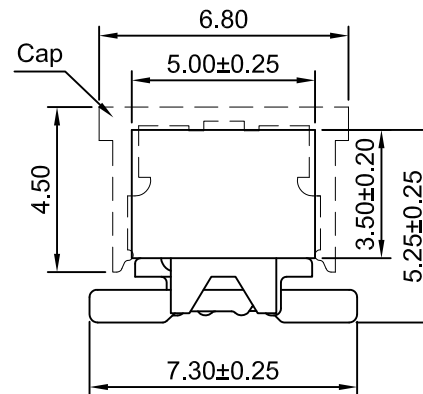

P.C.B LAYOUT

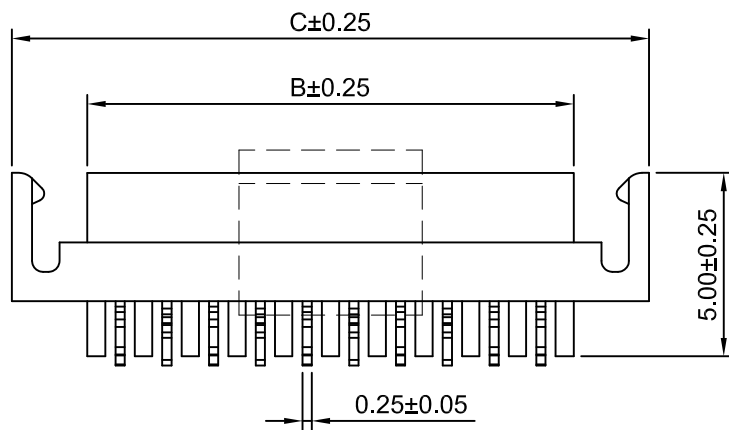

SPECIFICATIONS:

Current Rating: 1.0A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Housing Material: Nylon 6T,UL94V-0(Red)
Terminal Material: Phosphor Bronze/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
4P	3.81	5.60	9.70	16P	19.05	20.84	24.94
6P	6.35	8.14	12.24	18P	21.59	23.38	27.48
8P	8.89	10.68	14.78	20P	24.13	25.92	30.02
10P	11.43	13.22	17.32	22P	26.67	28.46	32.56
12P	13.97	15.76	19.86	24P	29.21	31.00	35.10
14P	16.51	18.30	22.40	26P	31.75	33.54	37.64

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	1.27mm PITCH VERTICAL WAFER - SMT TYPE	
DRAWN	CHKD	APPR		
Jianying Zhu	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			D1275HWVA-S-XP	A1

A1	CHANGE THE DRAWING	2023.07.12
A0	NEW RELEASE	2016.09.20
REV	DESCRIPTION	DATE