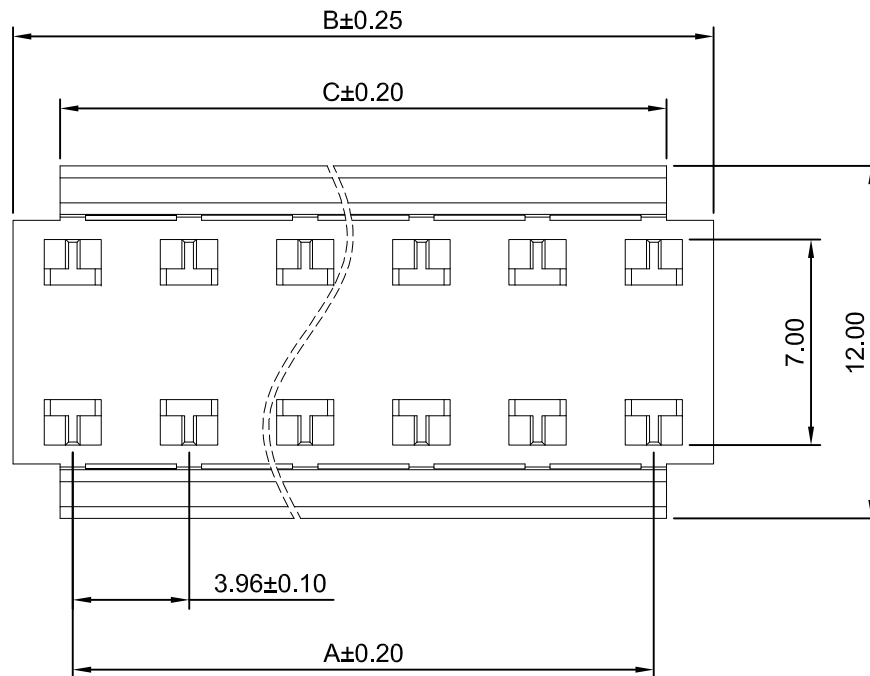


SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
D3961C-2P	3.96	8.02	4.82
D3961C-3P	7.92	11.98	8.78
D3961C-4P	11.88	15.94	12.74
D3961C-5P	15.84	19.90	16.70
D3961C-6P	19.80	23.86	20.66
D3961C-7P	23.76	27.82	24.62
D3961C-8P	27.72	31.78	28.58
D3961C-9P	31.68	35.74	32.54
D3961C-10P	35.64	39.70	36.50
D3961C-11P	39.60	43.66	40.46
D3961C-12P	43.56	47.62	44.42
D3961C-13P	47.52	51.58	48.38
D3961C-14P	51.48	55.54	52.34
D3961C-15P	55.44	59.50	56.30
D3961C-16P	59.40	63.46	60.26
D3961C-17P	63.36	67.42	64.22
D3961C-18P	67.32	71.38	68.18
D3961C-19P	71.28	75.34	72.14
D3961C-20P	75.24	79.30	76.10
D3961C-21P	79.20	83.26	80.06
D3961C-22P	83.16	87.22	84.02
D3961C-23P	87.12	91.18	87.98
D3961C-24P	91.08	95.14	91.94

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	3.96mm	
DRAWN	CHK'D	APPR	FEED-THRU STRAIN RELIEF	
Chengbiao Ye	Djankui Wan	Jack Yin	COVERS	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x,xx±0.50				
x,xxx±0.38				
x,xxxx±0.20				
ANGLES ±1°			D3961C-XP	

A0	NEW RELEASE	2022.10.28
REV	DESCRIPTION	DATE